

Product Catalogue

Flexible conduit systems, cable glands & accessories for hazardous areas



autoryzowany dystrybutor

ASTE Sp. z o.o.
Kowale, ul. Magnacka 25
80-180 Gdańsk
tel. 58 340 69 00, fax 58 340 69 01
e-mail: aste@aste.pl, www.aste.pl



Flexible conduit systems, cable glands & accessories for hazardous areas

[Introduction](#)

1

[Flexible conduit systems](#)

2

[Cable glands](#)

3

[Thread convertors, stopping plugs & accessories](#)

4

[Index](#)

5

Introduction

Introduction

Low voltage products for hazardous areas	1/3
Oil & Gas - Upstream applications	1/4
Oil & Gas - Midstream applications	1/6
Oil & Gas - Downstream applications	1/8
Food & Beverage applications	1/10
Chemical & Pharmaceutical applications	1/11

Standards, Zone Definitions & Product Markings

World standards & what they mean	1/12
Zone definitions - Onshore gases & vapours	1/14
Zone definitions - Offshore gases & vapours	1/16
Zone definitions - Dust	1/17
Product marking guide	1/18
Index of ingress protection	1/20



Introduction

Low voltage products for hazardous areas

At ABB, our focus is on improving your business performance by providing practical, reliable electrical products & services. To connect & protect for life. To solve everyday problems in the area's of Wire & Cable Management, Cable Protection, Power Connection & Control and Safety.

Our extensive engineering, supply chain management and technical sales support teams are committed to understanding everything that impacts your ability to accomplish your business objectives by reducing your total cost of ownership.

Whether you are designing, installing, operating, maintaining or owning an office building, off-shore platform, hospital, or a high speed train, power generating plant, machine equipment or a manufacturing facility, ABB engineered products fit and function in your application while providing superior performance, sustainability, and value throughout the project life cycle.

All our brands are built upon four product & service solution platforms. Platforms that address you or your customers' critical electrical & lighting needs covering the protection of data, energy, processes, assets and personal safety.

Beyond high performance application characteristics, ABB products, information and services facilitate and speed up your time critical assembly, installation or maintenance process:

Typical applications:


- Light fittings, boxes and enclosures
- Customised control panels for hazardous areas
- Ongoing R&D program for innovative and high performance products
- ATEX & IECEx products



Introduction

Oil & Gas applications - Upstream applications

1

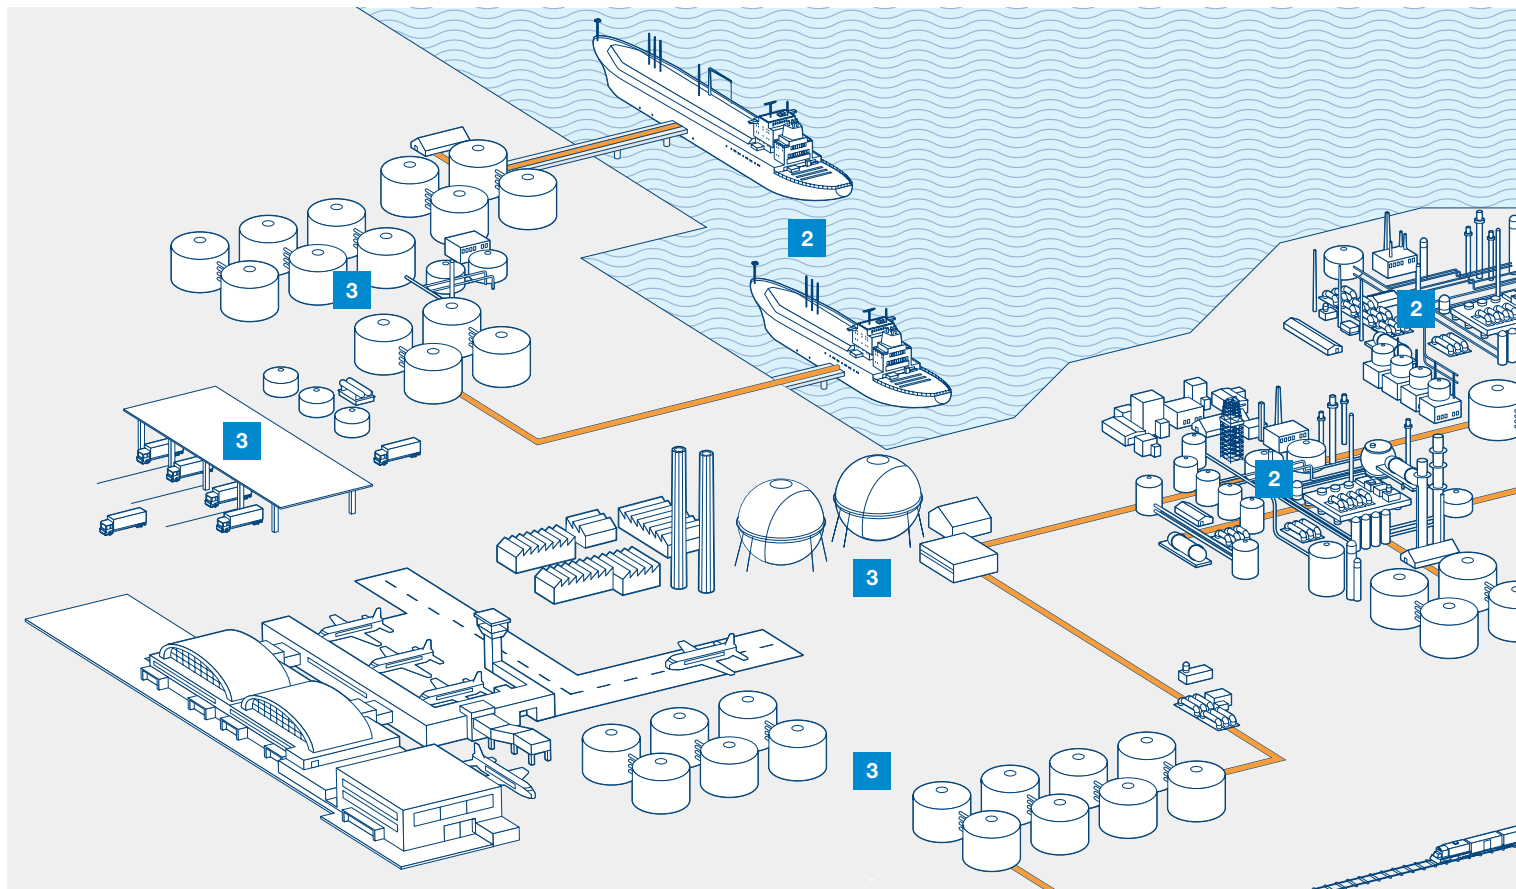

1 Upstream applications | 2 Midstream applications | 3 Downstream applications


The oil and gas market is split into three sectors Upstream, Midstream & Downstream. Upstream consists of Exploration and production. Midstream relates to the transportation, storage and partial processing of crude oil and gas from the wellheads to the refining plants. This brings another set of challenges to overcome. The term downstream relates to the processing and delivery of finished carbon related product to the end-user.

Upstream applications

Firstly, there are offshore applications such as the drilling rigs and production platforms. These are always open to extreme weather conditions so equipment used here needs to be able to withstand a salty environment. This is achieved through either manufacturing product from stainless steel, as is the case for Kopex-Ex conduit glands, or by ensuring that the product is coated or painted to withstand marine environments.

Equipment in offshore applications also needs to be hardwearing and easy to maintain as production downtime can be extremely costly for example FPSO (Floating Production Storage and Offloading) vessel can produce 200,000 barrels of crude oil per day at approx \$80 to \$90 per barrel. A breakdown would result in the vessel producing a loss of revenue of over \$700,000 per hour.

This has led to ABB products being used in many offshore applications to protect critical data and power cables across these massive vessels. Whether it is data cables from a gas detector or the cable protection on a power transmission unit, ABB offers a whole range of products that are tested and approved to many of the world standards.

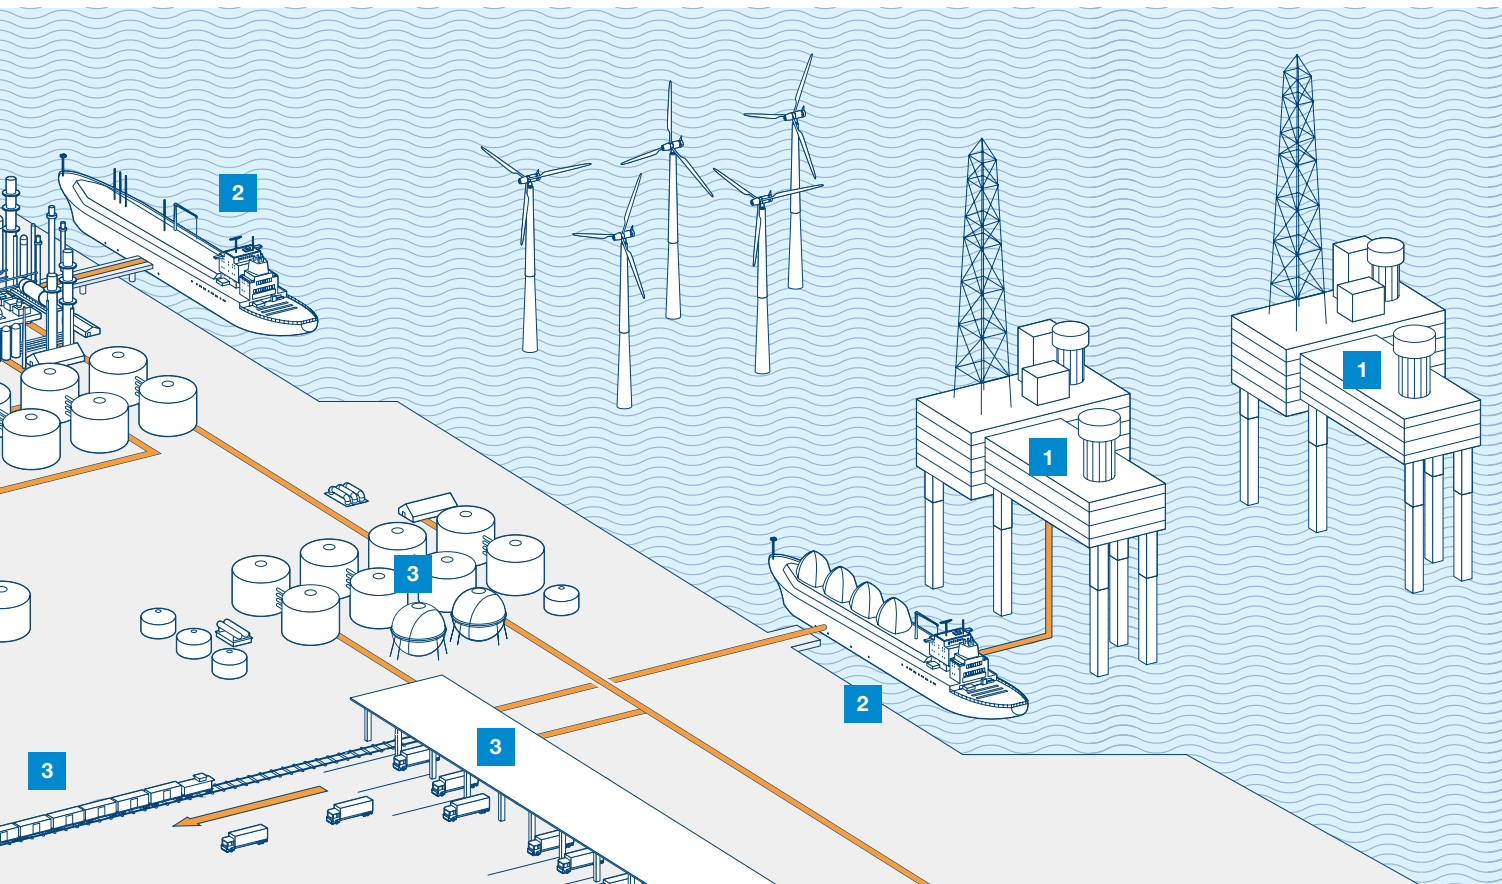

Onshore applications can also be split into exploration and production. Single onshore wells may produce as little as a few barrels per day but networking of onshore wells can result in production of millions of barrels per day.

This brings with it a whole new series of challenges to be overcome. Firstly, the drilling rigs tend to be mobile with motors and pumps often mounted on skids for easy transportation. This can lead to issues of connectivity for which Thomas and Betts has a range of thread converters in a variety of materials, many meeting world standards, ready to resolve the problem.

Secondly, so many rigs in network requires a massive monitoring operation to ensure that the flow of all the rigs is ongoing and consistent. This makes the protection of data cable critical. With the broadest range of systems and approvals, ABB leads the field in providing solutions.

Product Selection

- Salt water corrosion (offshore platforms)
- Oil and chemical resistance (Drilling rig MUD)
- Extreme ambient temperature
- Protection level
- Connectivity to other pieces of equipment
- Consequence of down time
- Approval level required (Ex e, Ex d, etc.)
- Approval specification required ATEX, IECEx
- Where product will be positioned, e.g. Zone 1 or Zone 2

Approvals / Characteristics

- ATEX Europe Directives 94/9/EC
- IECEx (International Scheme)
- Zones 1, 2, 21, 22
- IP66 ingress protection

Introduction

Oil & Gas - Midstream applications

1



Midstream relates to the transportation, storage and partial processing of crude oil and gas from the wellheads to the refining plants. This brings a different set of challenges to overcome.

This all relates to the fact that what is pumped out of the well is not pure and often contains a mixture of oil, gas, water and often sand which firstly need to be separated off from each other before being shipped or piped to a storage facility. This can be done in a variety of ways depending on the type of oil or gas that the well is pumping and can often take up to 4 processes before the commodity is separated out ready for piping or shipping. These processes require energy and this energy is often created from the commodity itself by the utilisation of the gas.

Once the separating has been completed, the commodity can then be moved to storage. In the case of an offshore rig this separating is often done on shore away from the rig then pumped to the storage depots. In the case of the FPSO vessels it is all done on board and the oil transferred to tankers at sea for delivery to storage depots.

Product selection

- Salt water corrosion (Tankers)
- Extreme ambient temperature
- Protection level
- Consequence of down time
- Approval level required (Ex e, Ex d, etc.)
- Approval specification required ATEX, IECEx
- Where product will be positioned, e.g. Zone 1 or Zone 2

Approvals / Characteristics

- ATEX Europe Directives 94/9/EC
- IECEx (International Scheme)
- Zones 1, 2, 21, 22
- IP66 ingress protection



This is also the point when all metering needs to take place to calculate invoices and taxes today. The amount of oil produced is shapely measures, also the density, viscosity, pressure, temperature, and in the case of gas, the amount of water vapour is also measured.

Oil is often pumped directly to the oil refinery which is where the down stream operation starts but often needs to go through a series of pumps to get the required pressure.

With the Kopex-Ex range of products, ABB can offer a range of products and services to meet the demands of midstream oil and gas markets. The Kopex-Ex range of conduit & fittings are manufactured to meet ATEX and IECEx standards. They are designed to be robust and to meet the vigors of the environment whether it is on oil tankers or in the refining production process.



Introduction

Oil & Gas - Downstream applications

1



The term downstream relates to the processing and delivery of finished carbon related product to the end-user. This covers a whole range of applications from refining to petrol stations.

There are over 700 refineries globally all competing to supply finished carbon based products to local and international markets. The products refined are varied including:

- Transportation fuels - LPG, gasoline, jet fuel, diesel, gas oil and bunker fuel
- Petrochemical feedstocks - LPG, naphtha and aromatics
- Energy sources - LPG, kerosene, heating oil and fuel oil
- Specialities - Lubricants, bitumen, coke, solvents and waxes
- Petrochemical feedstocks - Synthetic fibres (nylon), plastics (polyethylene, PVC)

Product Selection

- Continual Movement (CCTV)
- Extreme ambient temperature
- Protection level
- Consequence of down time
- Approval level required (Ex e, Ex d, etc.)
- Approval specification required ATEX, IECEx, UL, GOST, etc.
- Where product will be positioned, e.g. Zone 1 or Zone 2

Approvals / Characteristics

- ATEX Europe Directives 94/9/EC
- IECEx (International Scheme)
- Zones 1, 2, 21, 22



The refining process is in four stages, firstly distillation which separates it into 5 product sectors LPG, Naphtha, Kerosine, Gas, Oil, and Atmospheric residue, this is done using high temperature. The higher the temperature the higher the quality of the product.

The second stage is the upgrading or reforming. This stage is used to change the product at a molecular level for example changing the low octane version of Naphtha to high octane which can be blended into gasoline.

Stages three and four are about treating the product to remove impurities such as sulphur and blending the refined product into distinct products for the market.

The final stage of the downstream process is delivery to the market which involves storage and transportation. For example in the case of aviation fuel this can be shipped direct to airports by road or rail where it is stored, before transferring to tanker trucks for the refueling of aircraft.

All the stages in the downstream operation have different requirements to ensure safety of personnel and the quality of the end product. Kopex-Ex products are used in this area and are all designed for easy maintenance. There is also a range of instrumentation boxes either with standard configurations or custom built to meet the end-users' requirements, all of which are essential within a refinery where sensors play a key part on the process to ensure quality.

Introduction

Food & Beverage applications

1



1 Food processing - Explosion proof (Dust) | 2 Beverage manufacture - Explosion proof (Vapour)

Food Industry

ABB offers a range of products for the food processing market, including products for use in areas where stainless steel is preferred as well as areas classified as hazardous. ABB can offer stainless steel control stations for use on automated food processing and packaging machines as well as lighting specifically designed for use in dust filled atmospheres such as flour mills or other places where the risk of explosion is considered to be extremely high.



Beverage Industry

ABB has a range of products designed for being used in all beverage production sectors in the malting, brewing, wine, spirits or soft drink business. Kopex-Ex can supply fittings in stainless steel & nickel plated brass and work with other ABB products to reach the needs of hazardous areas where explosive gases may occur or in areas where cleanliness is required.

Introduction

Chemical & Pharmaceutical applications



1



3 Chemical engineering - Explosion proof | 4 Pharmaceutical production - Explosion proof

Chemical & Pharmaceutical Industry

The ABB range of products and solutions are ideal for use in the chemical and pharmaceutical Industry. Whether it is upstream in the primary production stage or downstream in the packing stage. Many of the processes and applications used in these areas require approvals to hazardous area standards making Kopex-Ex range of conduits & cable glands ideal.


Standards, zone definitions & product markings

World standards & what they mean

1

World standards and what they mean.

In this Section we will outline the different Standards used throughout the world and what it means for products specified for use in Hazardous Areas. Below is a map of the world which illustrates the Standards that are generally used in these regions.

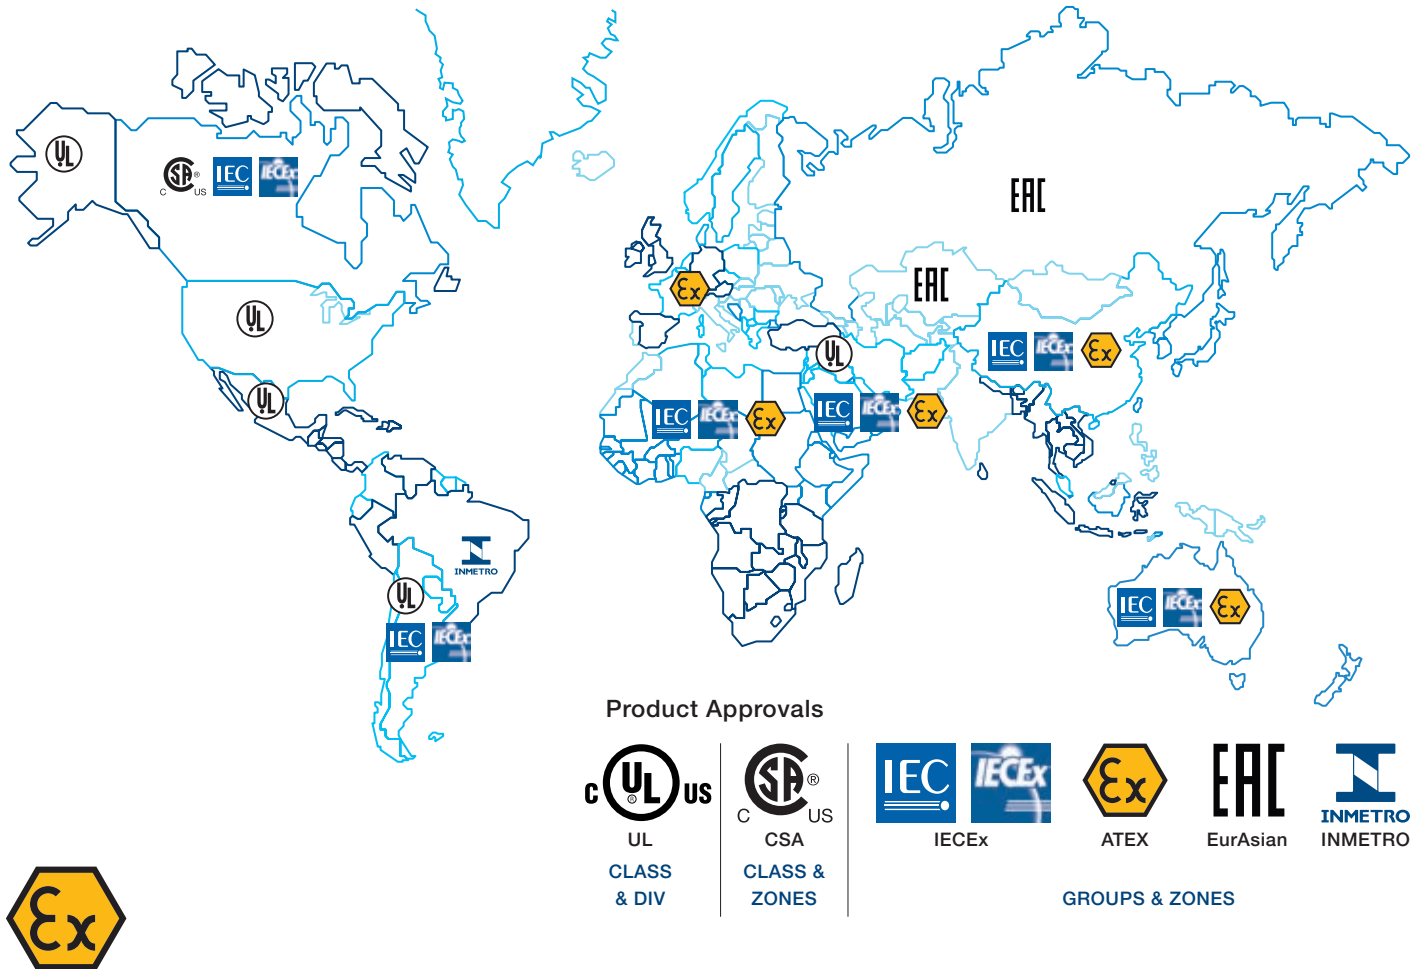

The ATEX Europe Directives 94/9/EC

ATEX requires employers to eliminate or control risks from dangerous substances and to classify areas where explosive atmospheres may occur into zones, as laid down in regulations. ATEX Directives are designed to protect employees, the public and the environment from accidents owing to explosive atmospheres and since July 1st 2006 all existing sites, as well as new sites, must be fully ATEX compliant.

Directive ATEX100a applies to equipment suppliers and manufacturers and ATEX137 applies to end users. These directives compliment each other, but have different purposes. ATEX100A covers both electrical and non-electrical products intended for use in hazardous areas, including mechanical equipment.

The Directive came into existence in 2003 and products sold within the European Union designed for use in hazardous areas must have ATEX certification and bear the ATEX marking on the product or on a certificate plate. The obligation is placed upon the manufacturer or supplier of the product and the intention is to facilitate free movement of goods within the EU.

Declaration of Conformance

This has to be issued by the supplier for every order which is to be installed in a hazardous area. This document has to show that the equipment supplied complies with the latest harmonized standard.



IECEX (International Scheme)

The IECEx scheme is an international certificate of conformance for products used in a hazardous area.

This scheme provides:

- a) A single certification of conformity for manufacturers to comply that includes:
- b) Testing and assessment of products to a standard including a full test report.
- c) Ongoing surveillance of manufacturers premises.
- d) A fast-track process for countries where regulations still require the issuing of national Ex certificates or approvals.

This scheme is in the process of being adopted by all the known standards across the world but are all working tovarious time scales.



UL (America) & CSA (Canada)

The American and Canadian standards are the only ones to have different classifications and locations. ATEX & IECEx work to Groups and Zones whereas the NEC & CEC works to Classes and Divisions, there is no direct comparison between the two. This means that it is imperative that the two standards are not inter-changed within an area.



EurAsian Conformity Mark (Customs Union)

EurAsian Conformity Mark follows similar rules to that of IECEx as far as the breakdown of the zones and other criteria are concerned.

EurAsian Conformity Mark is the standard for the Customs Union which includes the Russian Federation, Kazakhstan and Belarus.

Electrical materials for use in potentially explosive atmospheres must conform to two major certification standards: IEC/CENELEC and NEC

The IEC (International Electrotechnical Commission) standards are accepted in practically all countries. They are identical to the European CENELEC standards.

The NEC (National Electrical Code) is mandatory in the United States. The 1996 version, art. 505, takes up the IEC designations for gas, temperature classes for materials and zone definition.

Gases and vapours classification

Gases are divided into four groups in the NEC (National Electrical Code) and three groups for IEC/CENELEC. The groups display the same hierachy of classification of gases and vapour (See table on page 1/18).

Temperature classification

The IEC and the NEC have also defined a temperature classification for material used in zones at risk of explosion (See table on page 1/19).



Standards, zone definitions & product markings

Zone definitions - Onshore gases & vapours

1

ZONE
0


Zone 0 ———
Permanent / Frequent


Place in which an explosive atmosphere consisting of a mixture with air of flammable substances in the form of gas, vapour or mist is present continuously or for long periods, or frequently.

ZONE
1

Zone 1 ———
Occasional

Site where an atmosphere consisting of a mixture of air and inflammable substances in the form of gas, vapour or mist is likely to arise occasionally during normal operation.

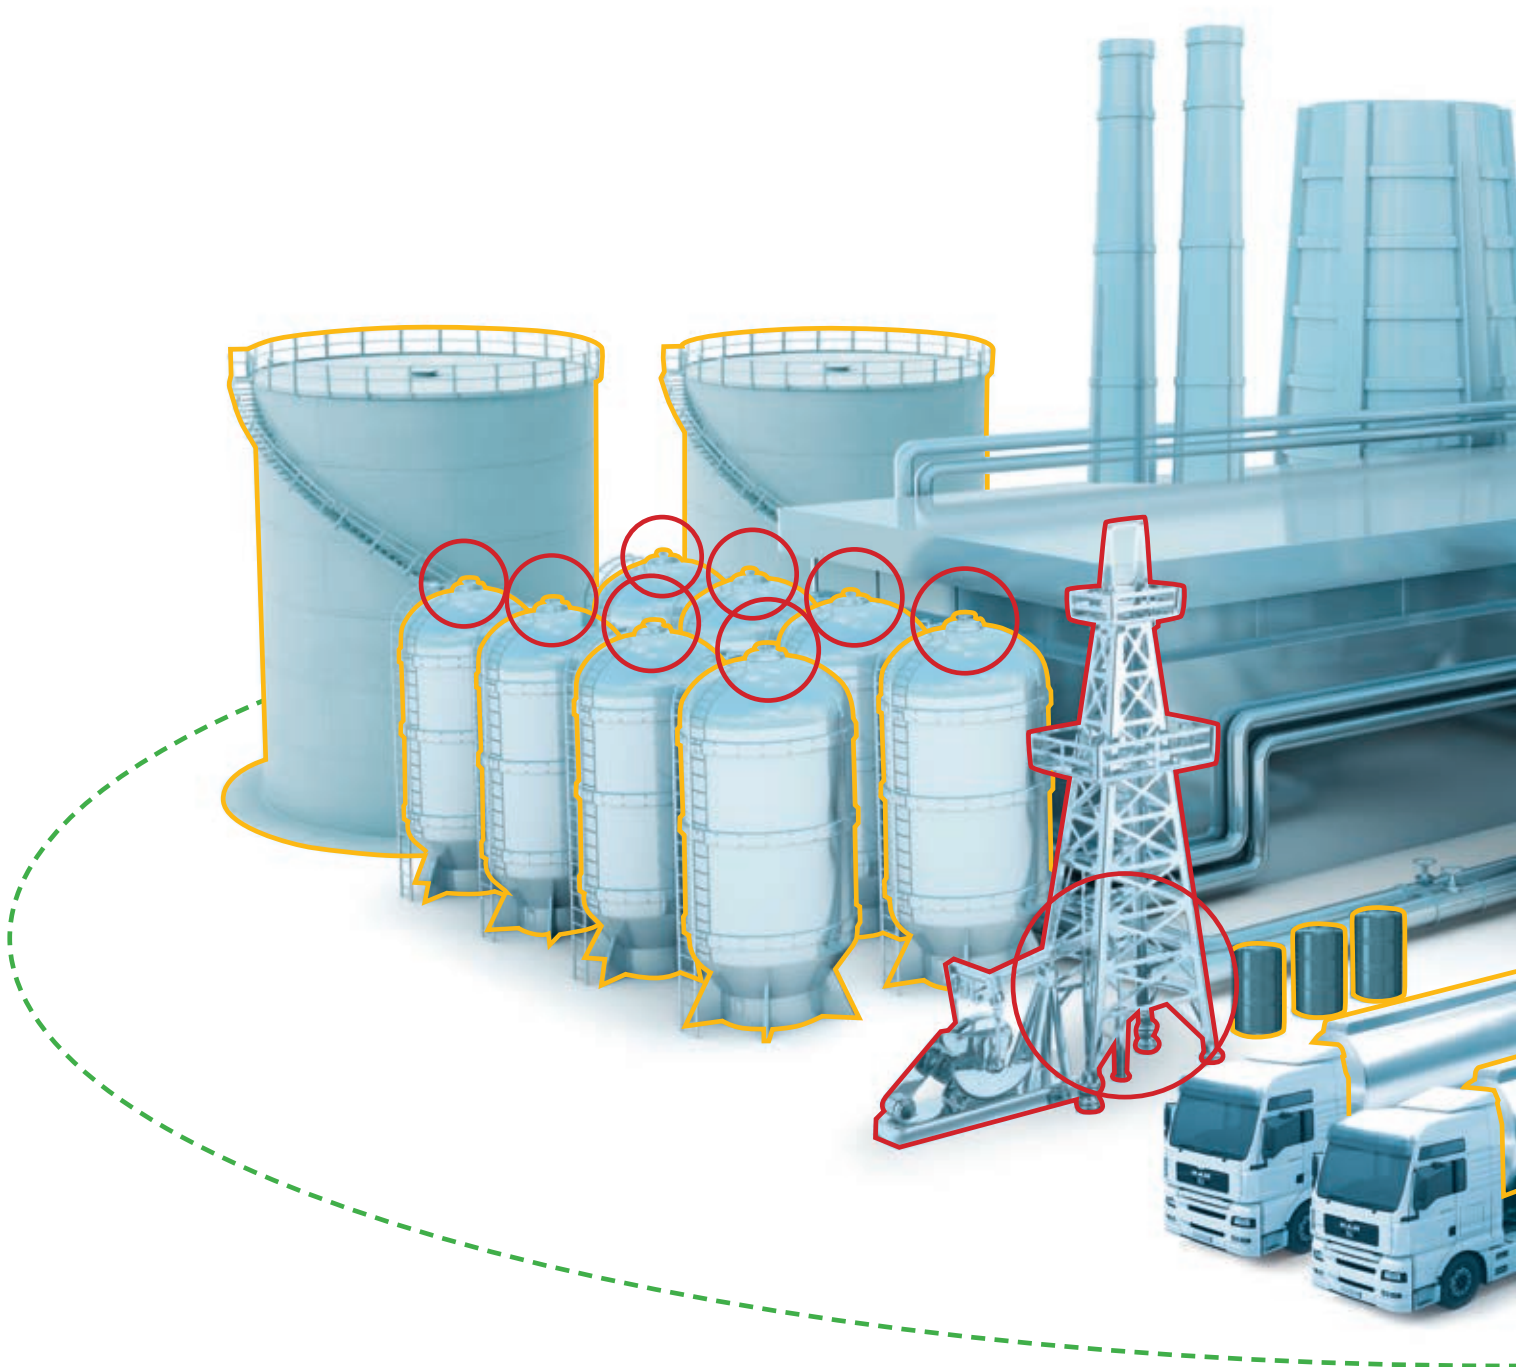

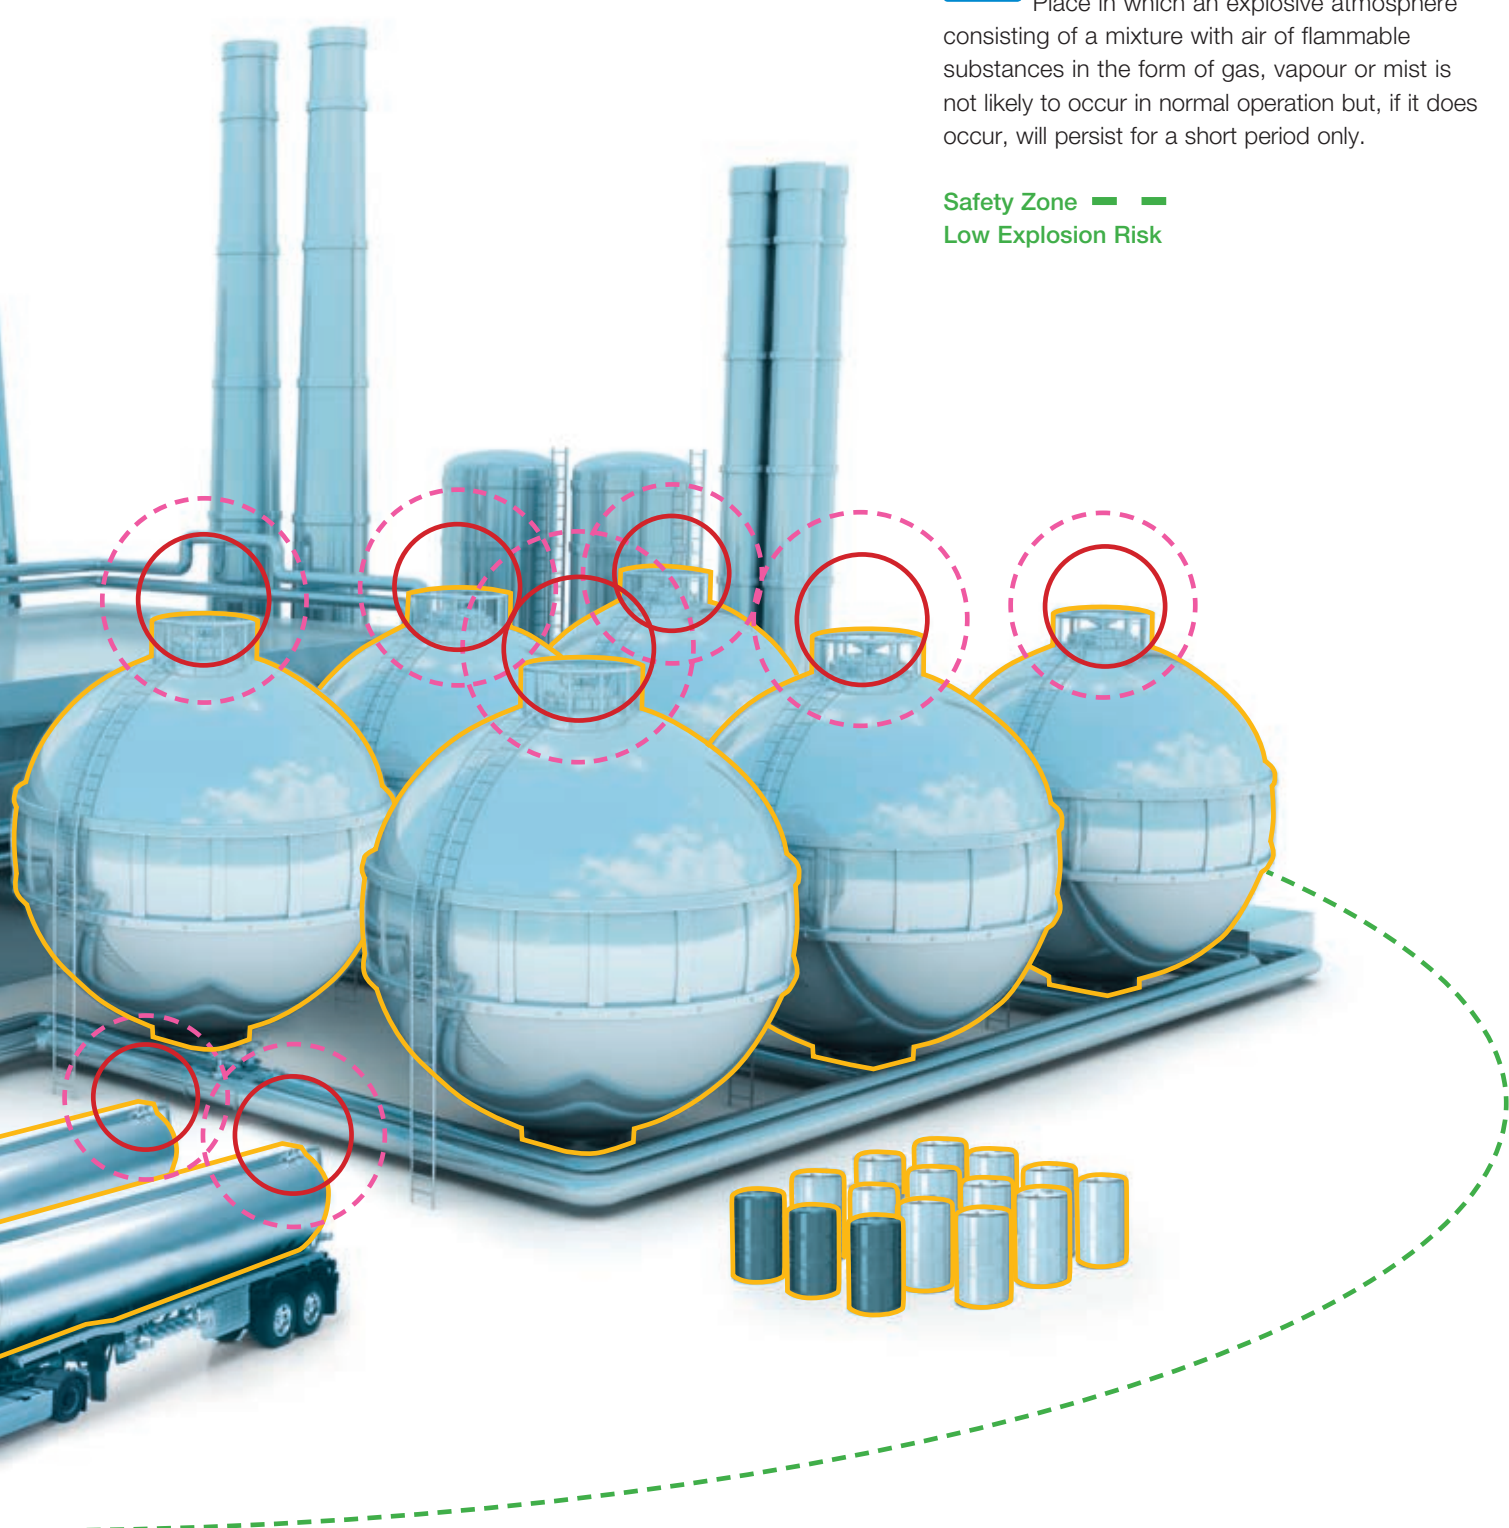

ZONE 2

**Zone 2 — —
Gas Irregular / Short Duration**

Place in which an explosive atmosphere consisting of a mixture with air of flammable substances in the form of gas, vapour or mist is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

**Safety Zone — —
Low Explosion Risk**

Standards, zone definitions & product markings

Zone definitions - Offshore gases & vapours

1

ZONE 0 Zone 0 ——— Permanent / Frequent

Place in which an explosive atmosphere consisting of a mixture with air of flammable substances in the form of gas, vapour or mist is present continuously or for long periods, or frequently.


Safety Zone - - -
Low Explosion Risk

ZONE 1 Zone 1 ——— Occasional

Site where an atmosphere consisting of a mixture of air and inflammable substances in the form of gas, vapour or mist is likely to arise occasionally during normal operation.

ZONE 2 ZONE 2 - - - Gas Irregular / Short Duration

Place in which an explosive atmosphere consisting of a mixture with air of flammable substances in the form of gas, vapour or mist is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

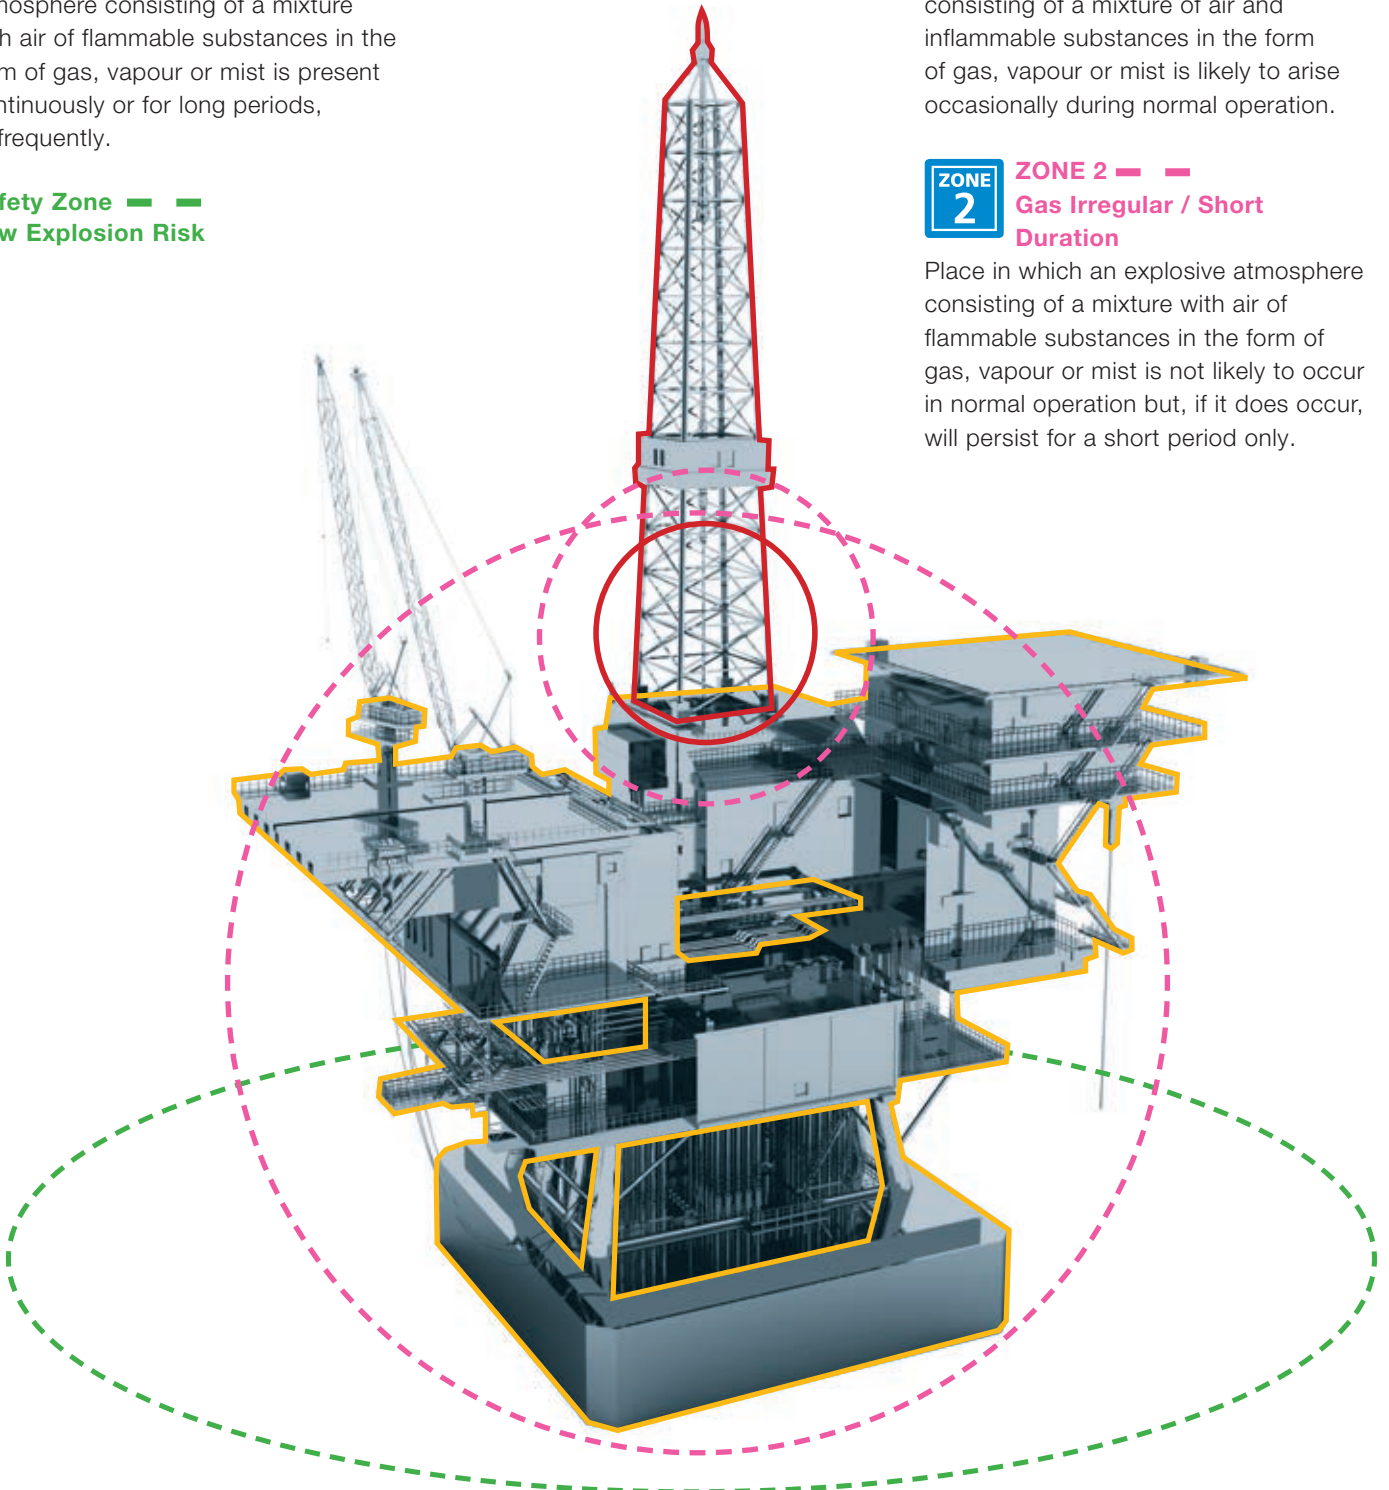

Standards, zone definitions & product markings


Zone definitions - Dust

ZONE 20 **Zone 20** **Permanent / Frequent**
Area in which an explosive atmosphere in the form of a cloud of combustible dust in air is present continuously, or for long periods, or frequently.

ZONE 21 **Zone 21** **Occasional**
Area in which an explosive atmosphere, in the form of a cloud of combustible dust in air is likely to occur, occasionally, in normal operation, occasionally.

ZONE 22 **Zone 22** **Dust Irregular / Short Duration**
Area in which an explosive atmosphere, in the form of a cloud of combustible dust in air is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

Safety Zone **Low Explosion Risk**

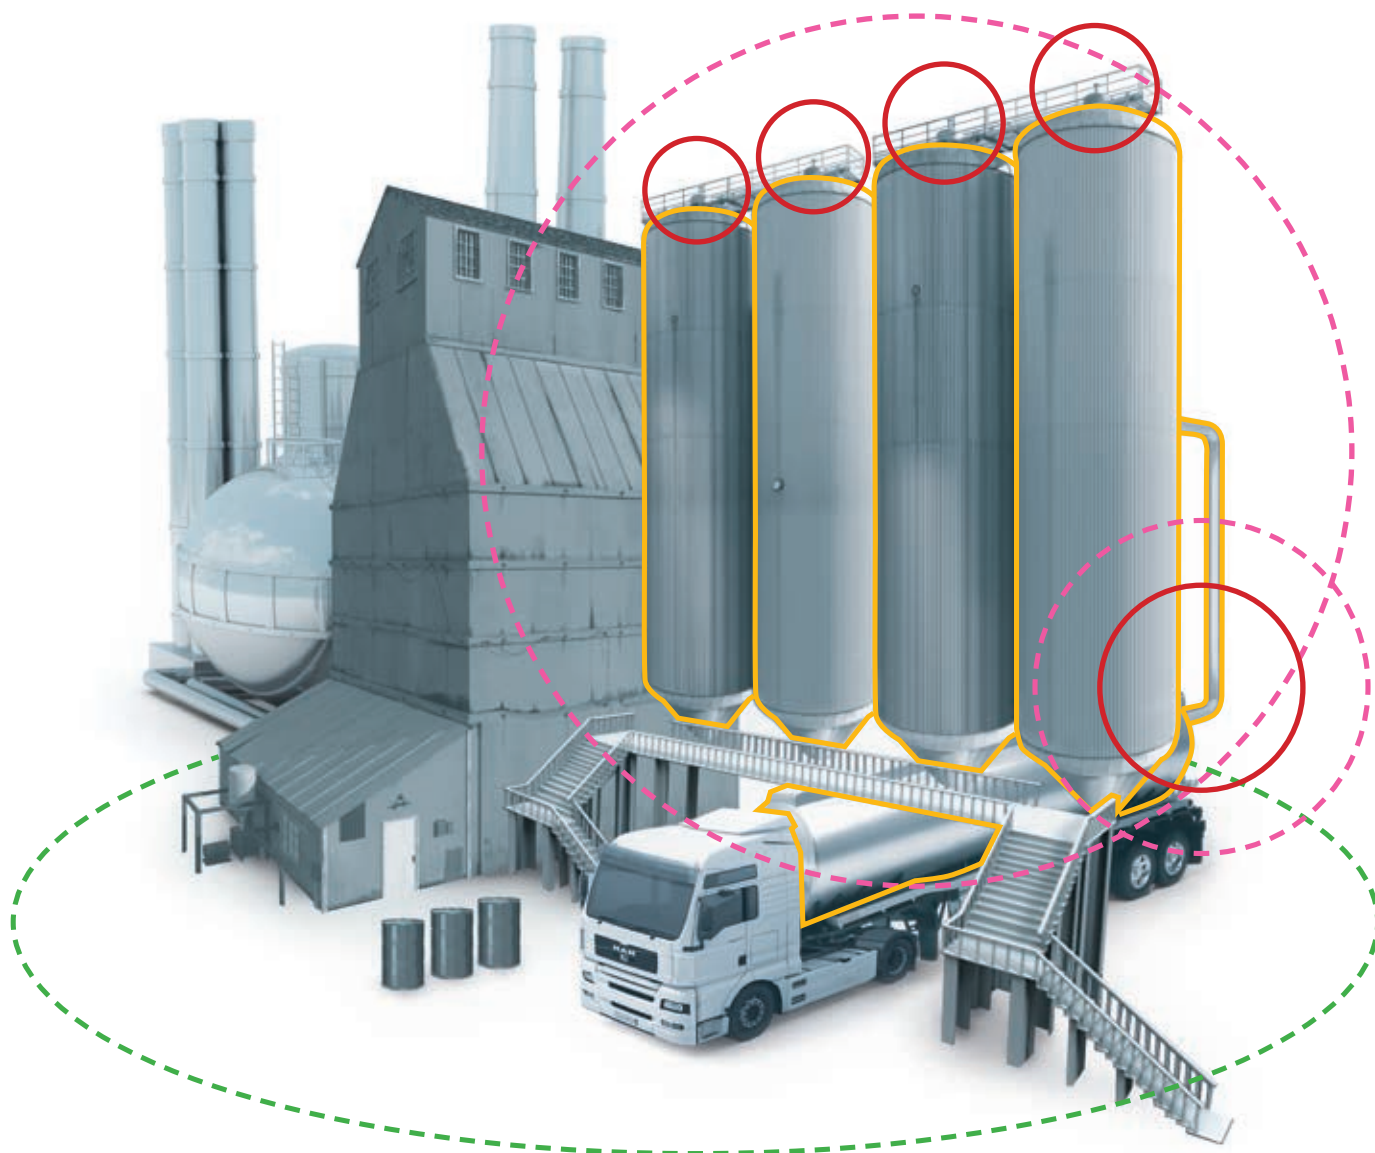

Standards, zone definitions & product markings

Kopex-Ex - Product marking guide

1

Classification of hazardous areas		European/IEC or NEC classifications		
Flammable substances	Temporary behaviour of flammable substances in hazardous places	Typical zones	Required marking for installation	
			equipment group	equipment protection level
Gases Vapours	is present continuously or for long periods or frequently	zone 0	II	Ga
	is likely to occur in normal operation occasionally	zone 1	II	Gb
	is not likely to occur in normal operation but, if it does occur, will persist for a short period only	zone 2	II	Gc
Dusts	is present continuously or for long periods or frequently	zone 20	III	Da
	is likely to occur in normal operation occasionally	zone 21	III	Db
	it is not likely to occur in normal operation but, if it does occur, will persist for a short period only	zone 22	III	Dc
Methane Dusts	-	mines	I	Ma
	-	mines	I	Mb

Subdivision of gases and vapours				
Apparatus may be used in group		Gases or vapours		
IIA	IIB	ammonia	ethyl alcohol	galsoline
		methane	cyclohexane	n-hexane
IIB	IIC	ethane	n-butane	acetaldehyde
		propane		
IIB	IIC	town gas, acrylnitril	ethylene oxide	ethylene glycol
				ethyl-ether
IIC	IIC	hydrogen	ethine (acetylene)	sulphide of carbon

Dust	
IIIA	Combustible Flyings
IIIB	Non-Conductive Dust
IIIC	Conductive Dust

Product stamp detail

KPEX  **I M2/II 2GD Exde I Mb Exde IIC Gb Extb IIIC Db**

(Product stamp detail)

 **CLI.Div1.ABCD .CLII.Div1.EFG.**

(Class & Divisions)

CLI (Class I), Div 1

Where ignitable concentrations of flammable gases, vapours or liquids are present within the atmosphere under normal operation conditions.

CLI (Class I), Div 2

Where ignitable concentrations of flammable gases, vapours or liquids are present within the atmosphere under abnormal operation conditions.

Class I areas

Group A: Acetylene / Group B: Hydrogen /
Group C: Propane & Ethylene / Group D: Benzene, Butane & Propane.

CLII (Class II), Div 1

Where ignitable concentrations of combustible dusts are present within the atmosphere under normal operation conditions.

CLII (Class II), Div 2

Where ignitable concentrations of combustible dusts are present within the atmosphere under abnormal operation conditions.

Class II areas

Group E: Metal Dust / Group F: Carbon & Charcoal / Group G: Flour, Starch, Wood & Plastic.

Restriction for using apparatus	
Requirements	Marking
Equipment without restriction	-
Equipment with special condition may be noted	X
Ex component, which is not intended to be used alone and requires additional certification before being used in hazardous area	U

Protection technique					
Application	Type of protection		Marking	EN/IEC standard	
All applications	General requirements		-	60079-0	
Control stations, motors, fuses, switchgear, power electronics	Flameproof enclosure		Ex d	60079-1	
Installation materials, motors, luminaries	Increased safety		Ex e	60079-7	
Measurement and control, automation technology, sensors, actuators	Intrinsic safety		Ex i	60079-11	
Switch- and control cupboards, analyse-apparatus, computers	Pressurisation		Ex p	60079-2	
Coils of motors or relays, solenoid valves	Encapsulation		Ex m	60079-18	
Transformers, relays, control stations, magnetic contactors	Oil immersion		Ex o	60079-6	
Capacitors, transformers	Powder filling		Ex q	60079-5	
See at the top - only for zone 2	'Non sparking'		Ex n	60079-15	
For use in zone 0, 1, 2 / for use in zone 1, 2	Dust atmospheres		Ex t	60079-31	

IECEx SIRA09.0103 X
(Certification Number)

New Marking - EPL's (Explosion Protection Levels)

The introduction of the EPL's and changes in the EN 60079 series standard has introduced new marking requirements.


- IIA **T1** Acetone 735°
- IIA **T1** Ammonia 630°
- IIB **T1** Carbon Monoxide 605°
- IIA **T1** Bensene 560°
- IIC **T1** Hydrogen 560°
- IIA **T1** Methane 537°
- IIA **T1** Toluene 535°
- IIA **T1** Styrene 490°
- IIA **T1** Propane 470°
- IIA **T1** 1-Butene 455°
- IIB **T1** Butadiene 430°

- IIB **T2** Ethylene 425°
- IIA **T2** Butane 372°
- IIA **T2** Ethanol 363°
- IIA **T2** Butylalcohol 359°
- IIB **T2** Dimetylether 350°
- IIC **T2** Acetylene 305°

- IIA **T3** Nafta 290°
- IIA **T3** Hydrogen Sulphide 270°
- IIA **T3** Cyclohexane 259°
- IIA **T3** Hexane 233°
- IIA **T3** Heptane 215°
- IIA **T3** Kerosene 210°
- IIA **T3** Dekane 201°

- IIB **T4** Diethyl Ether 160°

- IIC **T6** Carbon Disulphide 95°

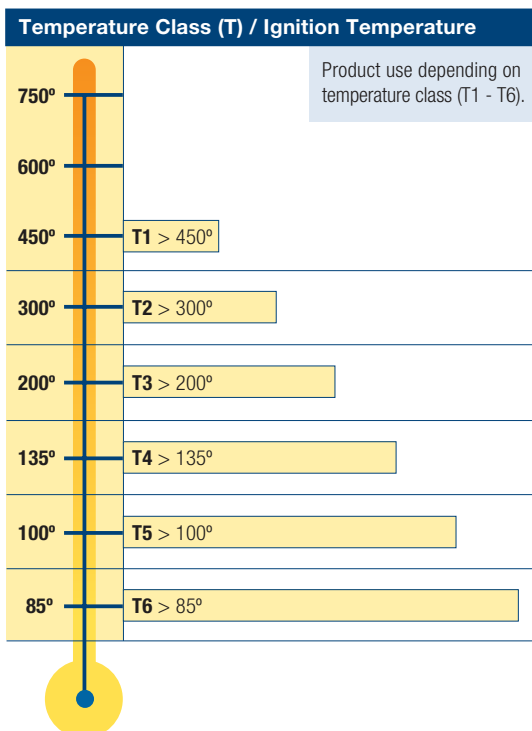

Standards, zone definitions & product markings

Index of ingress protection

1

IP Ratings

IP suitability ratings are a system for classifying the degree of protection provided by enclosures of electrical equipment.

Protection against Solid Bodies

Degree of protection for persons against access to hazardous parts inside the enclosure and/or against the ingress of solid foreign objects.

	0	No protection
	1	Objects greater than 50 mm, accidental touch by hands
	2	Objects greater than 12 mm, accidental touch by fingers
	3	Objects greater than 2.5 mm, e.g. tools/wires
	4	Objects greater than 1 mm, e.g. tools/wires/small wires
	5	Protected against dust - limited ingress (no harmful deposits)
	6	Totally protected against dust (Dust-tight)


Protection against Water

Degree of protection of equipment inside enclosures against damage from the ingress of water.

	0	No protection
	1	Protected against vertically falling drops of water
	2	Protected against direct sprays of water 15° from vertical
	3	Protected against sprays of water to 60° from vertical
	4	Protected against water sprayed from all directions - limited ingress permitted
	5	Protected against low pressure jets of water from all directions - limited ingress permitted
	6	Protected against strong pressure jets of water, heavy seas - limited ingress permitted
	7	Protection against the effects of immersion between 15cm - 1 m
	8	Protection against long periods of immersion under a quoted pressure, e.g. 2 bar at 24 hours
	9	IP69k Automotive standard DIN40050 and signifies resistance to high pressure jets of water (up to 80bar) from any angle

IP Ratings

The higher the number, the greater the degree of protection; they apply ONLY to properly installed equipment. The numerals stand for the following:

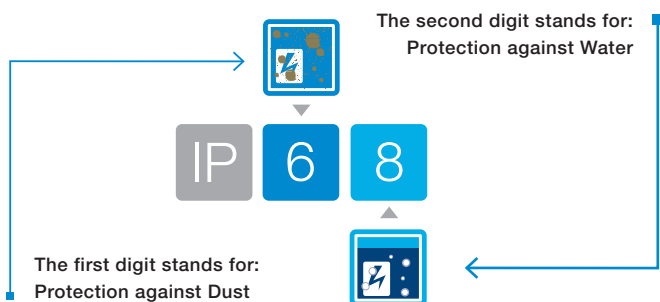



Flexible conduit systems for hazardous areas

Flexible Conduit Systems

Conduit fittings - Selection guide 2/2

Ex e Non-Metallic Nylon Conduit Systems

EXB Range - Anti-static nylon conduit	2/4
EXBB Range - Overbraided conduit	2/4
XESX Range - Anti-static nylon multi-layer conduit	2/5
Type EXPQ Straight Metallic Fitting	2/7
Type EXBQ Straight Metallic Braided Fitting	2/7
Type NENV - Straight conduit fitting	2/8
Type NENZ - Straight conduit fitting with strain relief	2/8
Type NEBV - 90° Elbow fitting	2/8
Type NEWV - 90° Elbow fitting	2/8
Type NEAV - 45° Elbow fitting	2/10
Type BESGR - Splice connector	2/10
Type BEYR - 'Y' Piece	2/10
Type BETR - 'T' Piece	2/10
Type BEAVR - Conduit adapter	2/11
Type NEIR - Straight female conduit fitting	2/11
Type BENR-REM - Corrugated conduit to rigid metal pipe connection	2/11
Type BEH - Conduit clip	2/11

Ex d e Liquid tight conduit Systems

EXLB Range - General oil resistant conduit - Galvanised core	2/12
EXSB Range - General oil resistant conduit - Stainless steel core	2/12
EXLT Range - Low fire hazard - Galvanised core	2/13
EXST Range - Low fire hazard - Stainless steel core	2/13
EXLH Range - High temperature - Galvanised core	2/14
EXSH Range - High temperature - Stainless steel core	2/14
EXLLH Range - High temperature - Galvanised core	2/15
EXSLH Range - High temperature - Stainless steel core	2/15
EXBBT Range - LFH with EMC protection conduit - Galvanised core	2/16
EXSBBT Range - LFH with EMC protection conduit - Stainless steel core	2/16
EXLHC Range - High temperature, highly flexible conduit - Galvanised core	2/17
EXSHC Range - High temperature, highly flexible conduit - Stainless steel core	2/17
G1 Gland	2/18
G1 90° Elbow gland	2/20
Universal gland	2/22

Explosion proof flexible couplings

XP Flex™ Range 2/24

Flexible conduit systems for hazardous areas

Conduit fittings - Selection guide

2



Type	Non-metallic conduit			Nylon conduit fittings				
	EXB Nylon conduit	EXBB Nylon conduit	XESX Nylon conduit	Straight metallic & braided fittings	Straight Nylon fittings	Nylon elbow fittings	Nylon Y & T piece fittings	Nylon fittings
Approvals								
ATEX	•	•	•	•	•	•	•	•
IEC / IECEX	•	•	•	•	•	•	•	•
CSA	-	-	-	-	-	-	-	-
UL	-	-	-	-	-	-	-	-
Protection Type								
Ex e	•	•	•	•	•	•	•	•
Ex d	-	-	-	-	-	-	-	-
Ex de	-	-	-	-	-	-	-	-
Ex tb	•	•	•	•	•	•	•	•
Zones								
Zone 1	•	•	•	•	•	•	•	•
Zone 2	•	•	•	•	•	•	•	•
Zone 21	•	•	•	•	•	•	•	•
Zone 22	•	•	•	•	•	•	•	•
Class / Division								
Class I / Div 1	-	-	-	-	-	-	-	-
Class I / Div 2	-	-	-	-	-	-	-	-
Class II / Div 1	-	-	-	-	-	-	-	-
Class II / Div 2	-	-	-	-	-	-	-	-
Section 2 / Page No.	2/4	2/4	2/5	2/7	2/8	2/9	2/10	2/11



Liquid tight conduit	Liquid tight fittings & glands			Explosion-proof couplings
	Group 1 fittings	90° elbow fittings	Group 1 Universal fittings	XP Flex Flexible Link
-	•	•	•	-
-	•	•	•	-
-	•	•	•	•
-	-	-	-	•
-	-	-	-	-
-	-	-	-	-
-	•	•	•	-
-	•	•	•	-
-	•	•	•	-
-	•	•	•	-
-	-	-	•	•
-	•	•	•	•
-	•	•	•	•
-	-	-	-	-
2/12	2/19	2/20	2/23	2/25

Non-metallic nylon conduit

EXB & EXBB Range - Anti-static nylon & overbraided conduit

2



Type EXB
Anti-static nylon conduit

EXB Range

Anti-Static Nylon Conduit

Compatible with: EXPQM / EXPQA fittings / Materials: Anti-Static Nylon 12 / Colour: ● Black

Part No.	Conduit Size Metric (mm)	Outside Diameter (mm)	Coil Length (m)
EXB03*	16	15.8	10/30/50
EXB04*	20	21.2	10/30/50
EXB05*	25	28.5	10/30/50
EXB06*	32	34.4	10/30/50
EXB07*	40	42.4	10/30/50
EXB08*	50	54.5	10/30/50
EXB09*	68	67.2	10/30/50
EXB010*	80	80	10/30/50

* Add coil length to complete part number, e.g. 10 metres = EXB0510

Certifications



Standards

EC Type examination certificate:

ATEX: Baseefa 08 ATEX 0003X

IECEX: IECEX BAS08.0001X

Ex e IIC Gb

Ex tb IIIC Db

Temperature Range

-20°C to +80°C

RTI 110°C to EN60079-0

Special Characteristics

Surface resistivity <math><10^6\Omega</math>



Type EXBB
Anti-static nylon conduit

EXBB Range

Overbraided Conduit

Compatible with: EXBQM / EXBQA fittings / Materials: Anti-Static Nylon 12 (Stainless Steel)

Part No.	Conduit Size (mm) Metric (mm)	Outside Diameter (mm)	Coil Length (m)
EXBB03*	16	15.8	50
EXBB04*	20	23.6	50
EXBB05*	25	30	50
EXBB06*	32	36	50
EXBB07*	40	43.5	30
EXBB08*	50	56.5	50

* Add coil length to complete part number, e.g. 10 metres = EXBB0550

Certifications



Standards

EC Type examination certificate:

ATEX: Baseefa 08 ATEX 0003X

IECEX: IECEX BAS08.0001X

Ex e IIC Gb

Ex tb IIIC Db

Temperature Range

-20°C to +80°C

RTI 110°C to EN60079-0

Special Characteristics

Screening level 60dB at 1MHz

Non-metallic nylon conduit

XESX Range - Anti-static nylon conduit



Type XESX
Anti-static nylon
multi-layer conduit

XESX Range

Anti-Static Nylon Multi-Layer Conduit

Compatible with: EXPQ and Nylon Fittings / Materials: Anti-Static Nylon 12 / Colour: ● Black

Part No.	Conduit Size Metric (mm)	Outside Diameter (mm)	Coil Length (m)
XESX0250	12	12.8	50
XESX0350	16	15.6	50
XESX0450	20	21	50
XESX0550	25	28.5	50
XESX0650	32	34.4	50
XESX0730	40	42.4	30
XESX0830	50	54.4	30

Certifications



Standards

EC Type examination certificate:

Metallic Fittings:

ATEX: Baseefa08ATEX0003X

IECEX: IECEX BAS08.0001X

Ex e IIC Gb Ex tb IIIC Db

Nylon Fittings:

ATEX: SEV15ATEX0121 - Nylon Fittings

IECEX: IECEX SEV15.0009 - Nylon Fittings

Ex eb IIC Ex tb IIIC

Temperature Range

-40°C to +85°C Metallic fittings

-5°C to +85°C Nylon fittings sizes 02-03

-20°C to +85°C Nylon fittings sizes 04-08


RTI 110°C to EN60079-0

Special Characteristics

Surface resistivity $<10^6\Omega$

Non-metallic nylon conduit EXBQ & EXPQ range - Metallic fittings

2

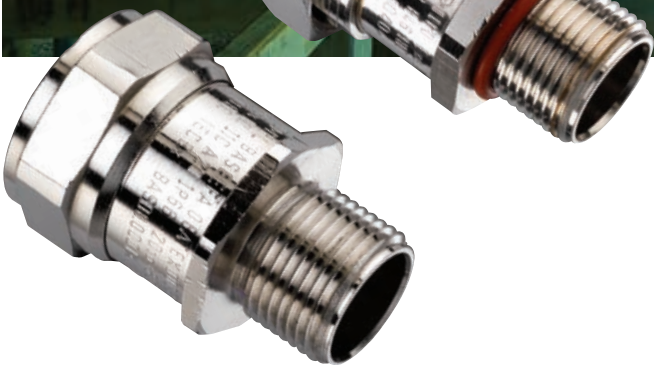

Features

- Manufactured in nickel plated brass
- Approved for use in Ex e applications for Zones 1, 2, 21 & 22
- Available in Metric & NPT thread
- EXPQM for use with unbraided nylon conduit
- EXBQA for use with braided nylon conduit


Certifications



Standards


Approved to:	IEC EN 60079-0, 60079-7, 60079-31
EC Type examination certificate to:	ATEX: Baseefa 08 ATEX 0003X IECEX: IECEX BAS08.0001X Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-40°C to +85°C
IP test:	IP66

Non-metallic nylon conduit EXBQ & EXPQ range - Metallic fittings



Type EXPQ
Nylon conduit fitting


Dimensions

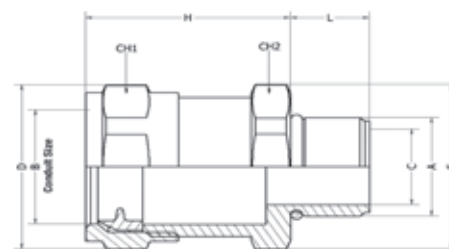

Type EXPQM / EXPQA for use with EXB and XESX conduits


Nylon Conduit Fitting / Materials: Nickel plated brass

Part No.	Thread Size A	Nominal conduit size B (mm)	Cable gland dimensions (mm)						
			C	D	E	L	H	CH1	CH2
EXPQM0303	M16	16.0	11.4	27.4	25.9	16.0	33.3	25.4	24.0
EXPQM0304	M20	16.0	11.4	27.4	25.9	16.0	33.3	25.4	24.0
EXPQM0404	M20	21.0	15.8	30.2	30.2	16.0	32.0	28.0	28.0
EXPQM0505	M25	28.0	19.0	41.0	41.0	16.0	39.0	38.0	38.0
EXPQM0606	M32	34.0	26.4	48.1	45.4	17.0	40.0	44.5	42.0
EXPQM0707	M40	42.0	32.9	61.6	58.3	17.0	49.5	57.0	54.0
EXPQM0808	M50	54.0	43.9	75.6	75.6	16.0	48.0	70.0	70.0
EXPQM0909	M63	63.0	56.0	91.8	91.8	16.0	54.6	84.0	84.0
EXPQM1010	M75	80.0	67.5	104.0	104.0	16.0	52.6	95.3	95.3
EXPQA0304	1/2" NPT	16.0	11.4	33.2	26.6	18.0	43.5	30.0	24.0
EXPQA0404	1/2" NPT	21.0	15.8	38.8	31.0	16.0	43.5	35.0	28.0
EXPQA0505	3/4" NPT	28.0	19.0	49.3	42.1	16.0	50.0	44.5	38.0
EXPQA0606	1" NPT	34.0	26.4	55.4	46.5	18.0	51.0	50.0	42.0
EXPQA0707	1 1/4" NPT	42.0	32.9	77.6	59.8	18.0	67.5	70.0	54.0
EXPQA0808	1 1/2" NPT	54.0	43.9	93.1	77.6	16.0	70.0	84.0	70.0
EXPQA0909	2" NPT	63.0	56.0	91.8	91.8	16.0	54.6	84.0	84.0
EXPQA1010	2 1/2" NPT	80.0	67.5	104.0	104.0	16.0	52.6	95.3	95.3

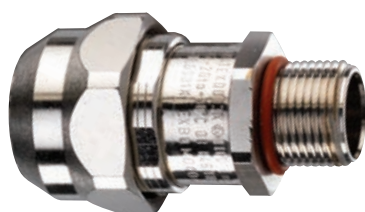

Type EXBQ
Braided conduit fitting

Dimensions

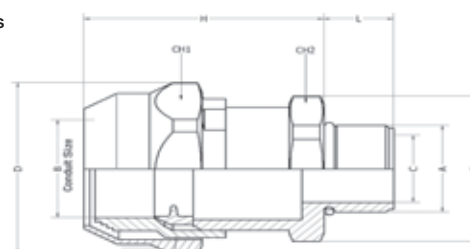

Type EXBQM / EXBQA for use with EXBB conduit

Nylon Conduit Fitting / Materials: Nickel plated brass

Part No.	Thread Size A	Nominal conduit size B (mm)	Cable gland dimensions (mm)						
			C	D	E	L	H	CH1	CH2
EXBQM0303	M16	16.0	11.4	27.4	25.9	16.0	33.3	25.4	24.0
EXBQM0304	M20	16.0	11.4	25.9	27.4	20.0	32.5	24.0	25.4
EXBQM0404	M20	21.0	15.8	30.2	30.2	20.0	31.5	28.0	28.0
EXBQM0505	M25	28.0	19.0	41.0	41.0	20.2	38.3	38.0	38.0
EXBQM0606	M32	34.0	26.4	45.4	48.1	24.2	40.0	42.0	44.5
EXBQM0707	M40	42.0	32.9	58.3	61.6	25.8	49.5	54.0	57.0
EXBQM0808	M50	54.0	40.7	75.6	75.6	26.1	48.0	70.0	70.0
EXBQA0304	1/2" NPT	16.0	11.4	33.2	26.6	20.0	44.5	30.0	24.0
EXBQA0404	1/2" NPT	21.0	15.8	38.8	31.0	20.0	45.0	35.0	28.0
EXBQA0505	3/4" NPT	28.0	19.0	49.3	42.1	20.2	54.0	44.5	38.0
EXBQA0606	1" NPT	34.0	26.4	55.4	46.5	24.2	57.5	50.0	42.0
EXBQA0707	1 1/4" NPT	42.0	32.9	77.6	59.8	25.8	70.0	70.0	54.0
EXBQA0808	1 1/2" NPT	54.0	40.7	93.1	77.6	26.1	70.0	84.0	70.0

Non-metallic nylon conduit system

Nylon conduit fittings for XESX conduit


2



Features

- Manufactured in modified nylon 12 with nickel plated brass threads
- Approved for use in Ex e applications for Zones 1, 2, 21 & 22

Certifications

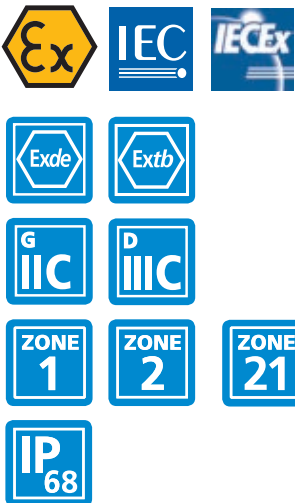

Standards

EC Type examination certificate to:	ATEX: SEV15ATEX0121 IECEX: IECEX SEV15.0009 Ex eb IIC Ex tb IIC
Safe operating temperature range:	12-16mm -5°C to +85°C 21-54mm -20°C to +85°C
IP test:	IP68

Non-metallic nylon conduit system

Nylon conduit fittings for XESX conduit (Ex only)



Type NENV
Straight male conduit fitting

Type NENV

Straight Male Conduit Fitting - Metric Thread / **Materials:** Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Thread Size (mm)
	Metric	Nominal	
NENV0203	12	10	16
NENV0303	16	12	16
NENV0404	20	17	20
NENV0505	25	23	25
NENV0606	32	29	32
NENV0707	40	36	40
NENV0808	50	48	50
NENV0909	50	48	63



Type NENZ
Straight male conduit fitting
with strain relief

Type NENZ

Straight Male Conduit Fitting with Strain Relief - Metric Thread

Materials: Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Thread Size (mm)
	Metric	Nominal	
NENZ0203S/P*	12	10	M16x1.5
NENZ0304S/P*	16	12	M20x1.5
NENZ0404S/P*	20	17	M20x1.5
NENZ0505S/P*	25	23	M25x1.5
NENZ0405S/P*	20	17	M25x1.5
NENZ0606S/P*	32	29	M32x1.5
NENZ0707S/P*	40	36	M40x1.5
NENZ0808S/P*	50	48	M50x1.5

* Available with various clamping ranges



Type NEBV
90° Curved elbow fitting

Type NEBV

90° Curved Elbow Fitting - Metric Thread / **Materials:** Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Thread Size (mm)
	Metric	Nominal	
NEBV0404	20	17	20
NEBV0505	25	23	25
NEBV0606	32	29	32
NEBV0707	40	36	40
NEBV0808	50	48	50



Type NEWV
90° Elbow fitting

Type NEWV

90° Elbow Fitting - Metric Thread / **Materials:** Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Thread Size (mm)
	Metric	Nominal	
NEWV0303	16	12	16

Non-metallic nylon conduit system

Nylon conduit fittings for XESX conduit

2



Type NEAV
45° Elbow fitting

Type NEAV

45° Elbow Fitting - Metric Thread / Materials: Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Thread Size (mm)
	Metric	Nominal	
NEAV0303	16	12	16
NEAV0404	20	17	20
NEAV0505	25	23	25
NEAV0606	32	29	32
NEAV0707	40	36	40
NEAV0808	50	48	50



Type BESGR
Splice connector

Type BESGR

Splice Connector / Materials: Anti-Static Nylon 12

Part No.	Conduit Size (mm)	
	Metric	Nominal
BESGR0303	16	12
BESGR0404	20	17
BESGR0505	25	23
BESGR0606	32	29
BESGR0707	40	36
BESGR0808	50	48



Type BEYR
'Y' Piece

Type BEYR

'Y' Piece / Materials: Anti-Static Nylon 12

Part No.	Conduit Size (mm)		2 x Conduit Size (mm)	
	Metric	Nominal	Metric	Nominal
BEYR030202	16	12	12	10
BEYR040303	20	17	16	12
BEYR050404	25	23	20	17
BEYR060505	32	29	25	23
BEYR070606	40	36	32	29
BEYR080707	50	48	40	36



Type BETR
'T' Piece

Type BETR

'T' Piece / Materials: Anti-Static Nylon 12

Part No.	Conduit Size (mm)	
	Metric	Nominal
BETR020202	12	10
BETR030303	16	12
BETR040404	20	17
BETR050505	25	23
BETR060606	32	29
BETR070707	40	36
BETR080808	50	48

Non-metallic nylon conduit system

Nylon conduit fittings for XESX conduit



Type BEAVR
Conduit adapter

Type BEAVR

Conduit Adapter / Materials: Anti-Static Nylon 12

Part No.	Fits into Fitting for Conduit Size (mm)		Fits to Conduit Size (mm)	
	Metric	Nominal	Metric	NW
BEAVR03/02	16	12	12	10
BEAVR04/03	20	17	16	12
BEAVR05/04	25	23	20	17
BEAVR06/05	32	29	25	23
BEAVR07/06	40	36	32	29
BEAVR08/07	50	48	40	36



Type NEIR
Straight female conduit fitting

Type NEIR

Straight Female Conduit Fitting - Metric Thread / Materials: Anti-Static Nylon 12 with nickel plated brass thread

Part No.	Conduit Size (mm)		Metric Female Thread Size (mm)
	Metric	Nominal	
NEIR0303	16	12	M16
NEIR0404	20	17	M20
NEIR0505	25	23	M25
NEIR0606	32	29	M32
NEIR0707	40	36	M40
NEIR0808	50	48	M50



Type BENRRE
Corrugated conduit to rigid metal pipe connection

Type BENRRE

Corrugated Conduit to Rigid Metal Pipe Connection

Materials: Anti-Static Nylon 12, Stainless Steel Jubilee Clip

Part No.	Conduit Size (mm)		Steel Tube Thread Size (mm)
	Metric	Nominal	
BENRRE030324	16	12	M16
BENRRE040428	20	17	M20
BENRRE050532	25	23	M25
BENRRE060644	32	29	M32
BENRRE070750	40	36	M40
BENRRE080865	50	48	M50



Type BEH
Conduit clip

Type BEH

Conduit Clip

Materials: Anti-Static Nylon 12

Part No.	Conduit Size (mm)	
	Metric	Nominal
BEH02	12	10
BEH03	16	12
BEH04	20	17
BEH05	25	23
BEH06	32	29
BEH07	40	36
BEH08	50	48

Liquid tight conduit EXLB & EXSB range

2



EXLB Range
General oil resistant liquid tight
conduit - Galvanised steel core

EXLB Range

General Oil Resistant Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a general purpose oil resistant coating / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXLB03*	16	3/8	12.5	10/30
EXLB04*	20	1/2	16.0	10/30
EXLB05*	25	3/4	21.0	10/30
EXLB06*	32	1	26.4	10/20
EXLB07*	40	1 1/4	35.3	10/20
EXLB08*	50	1 1/2	40.4	10/20
EXLB09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXLB0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -25°C to +105°C

Flexing temp: -5°C to +105°C

Flame propagation

Flame dies in less than 30 seconds after ignition
source is removed

Special Characteristics

Flame retardant PVC covering



EXSB Range
General oil resistant liquid
tight conduit - Stainless steel core

EXSB Range

General Oil Resistant Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel 316 core with general purpose oil resistant coating / **Colour:** ● Black

Part No.	Conduit Size Metric (mm)	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXSB03*	16	3/8	12.5	10/30
EXSB04*	20	1/2	16.0	10/30
EXSB05*	25	3/4	21.0	10/30
EXSB06*	32	1	26.4	10/20
EXSB07*	40	1 1/4	35.3	10/20
EXSB08*	50	1 1/2	40.4	10/20
EXSB09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXSB0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -25°C to +105°C

Flexing temp: -5°C to +105°C

Flame propagation

Flame dies in less than 30 seconds after ignition
source is removed

Special Characteristics

Flame retardant PVC covering

Liquid tight conduit EXLT & EXST range



EXLT Range
Low fire hazard liquid tight
conduit - Galvanised steel core

EXLT Range

Low Fire Hazard Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a LFH coating / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXLT03*	16	3/8	12.5	10/30
EXLT04*	20	1/2	16.0	10/30
EXLT05*	25	3/4	21.0	10/30
EXLT06*	32	1	26.4	10/20
EXLT07*	40	1 1/4	35.3	10/20
EXLT08*	50	1 1/2	40.4	10/20
EXLT09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXLT0510

Certifications

Certifications & Standards

Certification standard: IEC 61386
LUL fully compliant (E1042A6)
MOD to NES 518: Issue 3 DEF STAN 61-12 (Part 31) Issue 1

Temperature Range

Static temp: -25°C to +90°C
Flexing temp: -5°C to +90°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Limited fire hazard, zero halogen (BS6425 Pt 1)



EXST Range
Low fire hazard liquid tight
conduit - Stainless steel core

EXST Range

Low Fire Hazard Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel core with a LFH coating / **Colour:** ● Black

Part No.	Conduit Size Metric (mm)	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXST03*	16	3/8	12.5	10/30
EXST04*	20	1/2	16.0	10/30
EXST05*	25	3/4	21.0	10/30
EXST06*	32	1	26.4	10/20
EXST07*	40	1 1/4	35.3	10/20
EXST08*	50	1 1/2	40.4	10/20
EXST09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXST0510

Certifications

Standards

Certification standard: IEC 61386
LUL fully compliant (E1042A6)
MOD to NES 518: Issue 3 DEF STAN 61-12 (Part 31) Issue 1

Temperature Range

Static temp: -25°C to +90°C
Flexing temp: -5°C to +90°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Limited fire hazard, zero halogen (BS6425 Pt 1)

Liquid tight conduit EXLH & EXSH range

2



EXLH Range
High temperature liquid tight
conduit - Galvanised steel core

EXLH Range

High Temperature Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a high temperature resistant coating / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXLH03*	16	3/8	12.5	10/30
EXLH04*	20	1/2	16.0	10/30
EXLH05*	25	3/4	21.0	10/30
EXLH06*	32	1	26.4	10/20
EXLH07*	40	1 1/4	35.3	10/20
EXLH08*	50	1 1/2	40.4	10/20
EXLH09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXLH0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -50°C to +130°C

Flexing temp: -5°C to +90°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Flame resistance: UL94 V2
Chemical and oil resistant



EXSH Range
High temperature liquid tight
conduit - Stainless steel core

EXSH Range

High Temperature Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel core with a high temperature resistant coating / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXSH03*	16	3/8	12.5	10/30
EXSH04*	20	1/2	16.0	10/30
EXSH05*	25	3/4	21.0	10/30
EXSH06*	32	1	26.4	10/20
EXSH07*	40	1 1/4	35.3	10/20
EXSH08*	50	1 1/2	40.4	10/20
EXSH09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXSH0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -50°C to +130°C

Flexing temp: -5°C to +90°C

Flame propagation


Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Flame resistance: UL94 V2
Chemical and oil resistant

Liquid tight conduit

EXLLH & EXSLH range



EXLLH Range
High temperature liquid tight
conduit - Galvanised steel core

EXLLH Range

High Temperature Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a high temperature resistant coating / **Colour:** ● Blue

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXLLH03*	16	3/8	12.5	10/30
EXLLH04*	20	1/2	16.0	10/30
EXLLH05*	25	3/4	21.0	10/30
EXLLH06*	32	1	26.4	10/20
EXLLH07*	40	1 1/4	35.3	10/20
EXLLH08*	50	1 1/2	40.4	10/20
EXLLH09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXLLH0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -50°C to +130°C

Flexing temp: -5°C to +90°C


Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Flame resistance: UL94 V2

Chemical and oil resistant



EXSLH Range
High temperature liquid tight
conduit - Stainless steel core

EXSLH Range

High Temperature Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel core with a high temperature resistant coating / **Colour:** ● Blue

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXSLH03*	16	3/8	12.5	10/30
EXSLH04*	20	1/2	16.0	10/30
EXSLH05*	25	3/4	21.0	10/30
EXSLH06*	32	1	26.4	10/20
EXSLH07*	40	1 1/4	35.3	10/20
EXSLH08*	50	1 1/2	40.4	10/20
EXSLH09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXSLH0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -50°C to +130°C

Flexing temp: -5°C to +90°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

Flame resistance: UL94 V2

Chemical and oil resistant

Liquid tight conduit

EXBBT & EXSBBT range

2



EXBBT Range
Low fire hazard with EMC protection liquid tight conduit - Galvanised steel core

EXBBT Range

Low Fire Hazard with EMC Protection Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a galvanised steel EMC shield and LFH covering / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXBBT03*	16	3/8	12.5	10/30
EXBBT04*	20	1/2	16.0	10/30
EXBBT05*	25	3/4	21.0	10/30
EXBBT06*	32	1	26.4	10/20
EXBBT07*	40	1 1/4	35.3	10/20
EXBBT08*	50	1 1/2	40.4	10/20

* Add coil length to complete part number, e.g. 10 metres = EXBBT0510

Certifications

Standards

Certification standard: IEC 61386
MOD to NES 518: Issue 3 DEF STAN 61-12 (Part 31) Issue 1

Temperature Range

Static temp: -25°C to +90°C

Flexing temp: -5°C to +90°C

Special Characteristics

Limited Fire Hazard covering
EMC Screening level: 60db at 1MHz Braided



EXSBBT Range
Low fire hazard with EMC protection liquid tight conduit - Stainless steel core

EXSBBT Range

Low Fire Hazard with EMC Protection Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel core with a galvanised steel EMC shield and LFH covering / **Colour:** ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXSBBT03*	16	3/8	12.5	10/30
EXSBBT04*	20	1/2	16.0	10/30
EXSBBT05*	25	3/4	21.0	10/30
EXSBBT06*	32	1	26.4	10/20
EXSBBT07*	40	1 1/4	35.3	10/20
EXSBBT08*	50	1 1/2	40.4	10/20

* Add coil length to complete part number, e.g. 10 metres = EXSBBT0510

Certifications

Standards

Certification standard: IEC 61386
MOD to NES 518: Issue 3 DEF STAN 61-12 (Part 31) Issue 1

Temperature Range

Static temp: -25°C to +90°C

Flexing temp: -5°C to +90°C

Special Characteristics

Limited Fire Hazard covering
EMC Screening level: 60db at 1MHz Braided

Liquid tight conduit

EXLHC & EXSHC range



EXLHC Range
High temperature, highly flexible liquid tight conduit - Galvanised steel core

EXLHC Range

High Temperature, Highly Flexible Liquid Tight Conduit - Galvanised Steel Core

Materials: Galvanised steel core with a high temperature, highly flexible coating / Colour: ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXLHC03*	16	3/8	12.5	10/30
EXLHC04*	20	1/2	16.0	10/30
EXLHC05*	25	3/4	21.0	10/30
EXLHC06*	32	1	26.4	10/20
EXLHC07*	40	1 1/4	35.3	10/20
EXLHC08*	50	1 1/2	40.4	10/20
EXLHC09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXLHC0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -65°C to +150°C

Flexing temp: -45°C to +135°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

High flexibility
High temperature



EXSHC Range
High temperature, highly flexible liquid tight conduit - Stainless steel core

EXSHC Range

High Temperature, Highly Flexible Liquid Tight Conduit - Stainless Steel Core

Materials: Stainless steel core with a high temperature, highly flexible coating / Colour: ● Black

Part No.	Conduit Size Metric	US Trade Size (inch)	Inside Diameter (mm)	Coil Lengths (m)
EXSHC03*	16	3/8	12.5	10/30
EXSHC04*	20	1/2	16.0	10/30
EXSHC05*	25	3/4	21.0	10/30
EXSHC06*	32	1	26.4	10/20
EXSHC07*	40	1 1/4	35.3	10/20
EXSHC08*	50	1 1/2	40.4	10/20
EXSHC09*	63	2	51.6	10/20

* Add coil length to complete part number, e.g. 10 metres = EXSHC0510

Certifications

Standards

Certification standard: IEC 61386

Temperature Range

Static temp: -65°C to +150°C

Flexing temp: -45°C to +135°C

Flame propagation

Flame dies in less than 30 seconds after ignition source is removed

Special Characteristics

High flexibility
High temperature

Liquid tight hazardous area flameproof glands

G1 conduit fitting


2



Features

- Constructed from either brass or stainless steel with an epoxy resin barrier the Group I flameproof gland is a high specification product, ideal for all hazardous area applications

Certifications

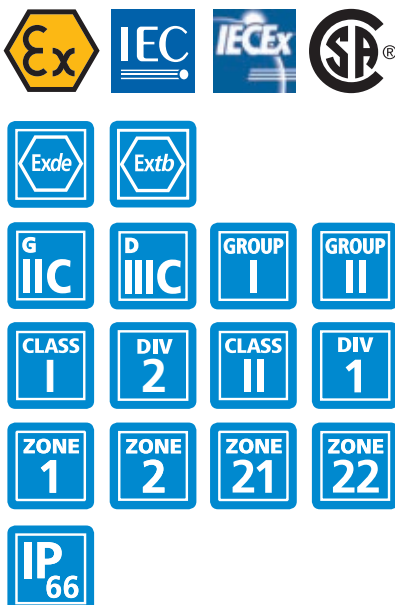

Standards


Approved to:	IEC EN 60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	ATEX: Sira 09 ATEX 1231X IECEx: IECEx SIR09.0103X CSA: CSA File No: 060582 Ex de I Mb Ex de IIC Gb Ex tb IIIC Db Class I Div 2 ABCD Class II Div 1 EFG
Safe operating temperature range:	-60°C to +130°C
IP test:	IP66

Liquid tight hazardous area flameproof glands

G1 conduit fitting



G1 conduit fitting
Liquid tight hazardous area
flameproof gland

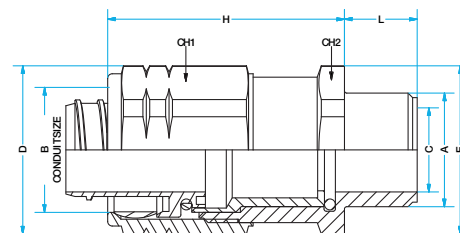

Dimensions


HAM G1 conduit fitting

Liquid Tight Hazardous Area Flameproof Gland - Metric Thread / **Materials:** Nickel plated brass, Brass or Stainless steel 316

Part No. Nickel plated brass	Metric Thread Size A (mm)	Conduit Size B (mm)	Cable Gland Dimensions (mm)						
			C	D	E	L	H	CH1	CH2
HAMM0304G1	M16	16.0	10.0	34.0	31.0	15.0	50.0	32.0	28.6
HAMM0404G1	M20	20.0	12.5	34.0	31.0	15.0	50.0	32.0	28.6
HAMM0505G1	M25	25.0	18.4	37.0	37.0	15.0	50.0	34.0 (34.9 in SS)	34.0
HAMM0606G1	M32	32.0	24.7	45.0	45.0	15.0	50.0	42.0 (42.5 in SS)	42.0
HAMM0707G1	M40	40.0	29.7	57.0	54.0	15.0	57.0	52.0	50.0
HAMM0808G1	M50	50.0	41.7	64.0	64.0	15.0	58.0	60.0	60.0
HAMM0909G1	M63	63.0	51.7	78.0	76.2	15.0	70.6	69.7	70.0

* For Brass version, remove last M from the reference, e.g. HAM0304G1 for Metric / HAA0304G1 for NPT

** For Stainless Steel version, replace last M from the reference with an S, e.g. HAMS0304G1 for Metric / HAAS0304G1 for NPT

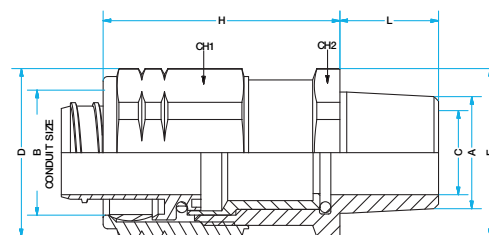

Dimensions

HAA G1 conduit fitting

Liquid Tight Hazardous Area Flameproof G1 Gland - NPT Thread / **Materials:** Nickel plated brass, Brass or Stainless steel 316

Part No. Nickel plated brass	NPT Thread Size A (inch)	Conduit Size B (mm)	Cable Gland Dimensions (mm)						
			C	D	E	L	H	CH1	CH2
HAAM0304G1	1/2	16.0	10.0	34.0	31.0	20.2	50.0	32.0	28.6
HAAM0404G1	1/2	20.0	12.5	34.0	31.0	20.2	50.0	32.0	28.6
HAAM0505G1	3/4	25.0	18.4	37.0	37.0	20.2	50.0	34.0 (34.9 in SS)	34.0
HAAM0606G1	1	32.0	24.7	45.0	45.0	25.0	50.0	42.0 (42.5 in SS)	42.0
HAAM0707G1	1 1/4	40.0	29.7	57.0	54.0	25.6	57.0	52.0	50.0
HAAM0808G1	1 1/2	50.0	41.7	64.0	64.0	26.0	58.0	60.0	60.0
HAAM0909G1	2	63.0	51.7	78.0	76.2	27.0	70.6	69.7	70.0

* For Brass version, remove last M from the reference, e.g. HAM0304G1 for Metric / HAA0304G1 for NPT

** For Stainless Steel version, replace last M from the reference with an S, e.g. HAMS0304G1 for Metric / HAAS0304G1 for NPT


Liquid tight hazardous area flameproof glands

G1 90° elbow conduit fitting

2



G1 90° Elbow Gland
Liquid tight hazardous area
flameproof gland

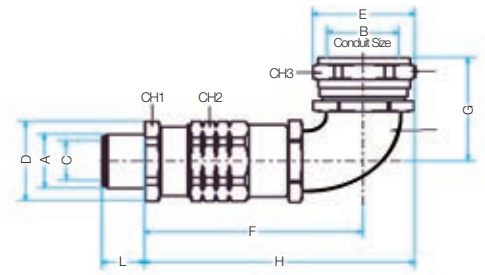

Dimensions

HAM G1 90° Elbow conduit fitting

Liquid Tight Hazardous Area Flameproof Gland - Metric Thread / **Materials:** Nickel plated brass or Stainless steel 316

Part No. Nickel plated brass	Metric Thread Size A (mm)	Conduit Size B (mm)	Cable Gland Dimensions (mm)									
			C	D	E	F	G	H	L	CH1	CH2	CH3
HAMM0304E	M16	16.0	10.0	31.7	35.5	94.0	35.0	90.0	15.0	28.6	32.0	32.0
HAMM0404E	M20	21.0	12.5	31.7	35.5	95.0	335.0	90.0	15.0	28.6	32.0	32.0
HAMM0505E	M25	28.0	18.4	37.7	38.7	101.0	36.0	104.0	15.0	34.0	34.0 (34.9 in SS)	34.0 (34.9 in SS)
HAMM0606E	M32	34.0	24.7	46.5	46.5	109.0	40.0	114.0	15.0	42.0	42.0 (42.5 in SS)	42.0 (42.5 in SS)
HAMM0707E	M40	42.0	29.7	55.4	57.6	115.0	48.0	180.0	15.0	50.0	52.0	52.0
HAMM0808E	M50	54.0	41.7	66.5	66.5	123.0	56.0	146.0	15.0	60.0	60.0	60.0

* For Brass version, remove last M from the reference, e.g. HAM0304E for Metric / HAA0304E for NPT

** For Stainless Steel version, replace last M from the reference with an S, e.g. HAMS0304E for Metric / HAAS0304E for NPT

HAA G1 90° Elbow conduit fitting

Liquid Tight Hazardous Area Flameproof Gland - NPT Thread / **Materials:** Nickel plated brass or Stainless steel 316

Part No. Nickel plated brass	NPT Thread Size A (inch)	Conduit Size B (mm)	Cable Gland Dimensions (mm)									
			C	D	E	F	G	H	L	CH1	CH2	CH3
HAAM0304E	1/2	16.0	10.0	31.7	35.5	98.0	35.0	90.0	20.2	28.6	32.0	32.0
HAAM0404E	1/2	21.0	12.5	31.7	35.5	98.0	335.0	90.0	20.2	28.6	32.0	32.0
HAAM0505E	3/4	28.0	18.4	37.7	38.7	103.4	36.0	104.0	20.2	34.0	34.0 (34.9 in SS)	34.0 (34.9 in SS)
HAAM0606E	1	34.0	24.7	46.5	46.5	103.4	40.0	114.0	25.0	42.0	42.0 (42.5 in SS)	42.0 (42.5 in SS)
HAAM0707E	1 1/4	42.0	29.7	55.4	57.6	120.0	48.0	180.0	25.6	50.0	52.0	52.0
HAAM0808E	1 1/2	54.0	41.7	66.5	66.5	126.0	56.0	146.0	26.0	60.0	60.0	60.0

* For Brass version, remove last M from the reference, e.g. HAM0304E for Metric / HAA0304E for NPT

** For Stainless Steel version, replace last M from the reference with an S, e.g. HAMS0304E for Metric / HAAS0304E for NPT



Liquid tight hazardous area flameproof glands

Universal fitting

2



Features

- Constructed from either brass, nickel plated or stainless steel with an epoxy resin barrier
- The Group I universal flameproof gland is a high specification product, ideal for all hazardous area applications

Certifications




Standards

Approved to:	IEC EN 60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	ATEX: Sira 09 ATEX 1231X IECEX: IECEX SIR09.0103X CSA: CSA File No: 060582 Ex de I Mb Ex de IIC Gb Ex tb IIIC Db Class I Div 1 BCD (Rigid conduit only) Class I Div 2 ABCD Class II Div 1 ABCD
Safe operating temperature range:	-60°C to +130°C
IP test:	IP66

Liquid tight hazardous area flameproof glands


Universal fitting

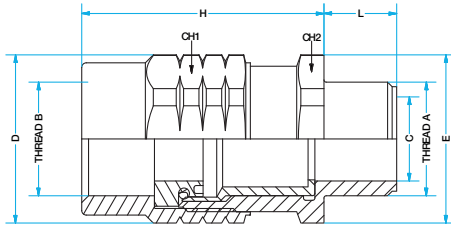

HAM 03 04 U

Dimensions

Thread A = M16 Thread B = M20

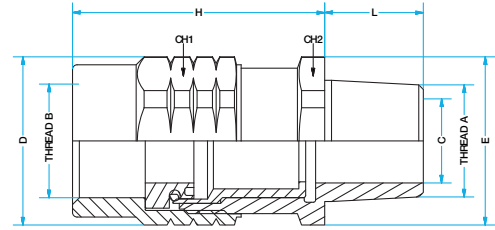

HAA 03 04 U

Thread A = 3/8" Thread B = 1/2"



Universal fitting
Liquid tight hazardous area flameproof gland

HAM Universal fitting

Liquid Tight Hazardous Area Flameproof Gland - Metric Thread

Materials: Nickel plated, Brass or Stainless steel

Part No.	Male Thread Size Metric (mm)	Female Thread Size Metric (mm)
Nickel Plated		
HAMM0304U	20	16
HAMM0404U	20	20
HAMM0505U	25	25
HAMM0606U	32	32
HAMM0707U	40	40
HAMM0808U	50	50
HAMM0909U	63	63
Brass		
HAM0304U	20	16
HAM0404U	20	20
HAM0505U	25	25
HAM0606U	32	32
HAM0707U	40	40
HAM0808U	50	50
HAM0909U	63	63
Stainless Steel		
HAMS0304U	20	16
HAMS0404U	20	20
HAMS0505U	25	25
HAMS0606U	32	32
HAMS0707U	40	40
HAMS0808U	50	50
HAMS0909U	63	63

* For use with rigid conduit or other fittings

HAA Universal fitting

Liquid Tight Hazardous Area Flameproof Gland - NPT Thread

Materials: Nickel plated brass, Brass or Stainless steel

Part No. - NPT	Male Thread Size NPT (inch)	Female Thread Size NPT (inch)
Nickel Plated		
HAAM0304U	1/2	3/8
HAAM0404U	1/2	1/2
HAAM0505U	3/4	3/4
HAAM0606U	1	1
HAAM0707U	1 1/4	1 1/4
HAAM0808U	1 1/2	1 1/2
HAAM0909U	2	2
Brass		
HAA0304U	1/2	3/8
HAA0404U	1/2	1/2
HAA0505U	3/4	3/4
HAA0606U	1	1
HAA0707U	1 1/4	1 1/4
HAA0808U	1 1/2	1 1/2
HAA0909U	2	2
Stainless Steel		
HAAS0304U	1/2	3/8
HAAS0404U	1/2	1/2
HAAS0505U	3/4	3/4
HAAS0606U	1	1
HAAS0707U	1 1/4	1 1/4
HAAS0808U	1 1/2	1 1/2
HAAS0909U	2	2

* For use with rigid conduit or other fittings

Explosion-proof flexible couplings

XP Flex™ range


2



Features

- UL listed for use in hazardous and wet locations
- Corrosion-resistant - ideal for washdown areas
- Flexible bronze construction with arc-resistant inner sleeve and brass fittings
- Terminated with two threaded female end fittings and male close nipples
- No bonding jumper required


Certifications




Standards

UL listed:	0.5" and 0.75" hub sizes: Class I Div 1 & 2 ABCD; Class II Div 1 EFG, Class III 1" hub size: Class I Div 1 & 2 CD; Class II Div 1 EFG, Class III UL listed 886
-------------------	--

Explosion-proof flexible couplings XP Flex™ range

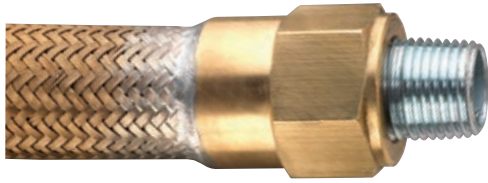

XP Flex™ Range
Explosion-proof flexible couplings
flameproof gland

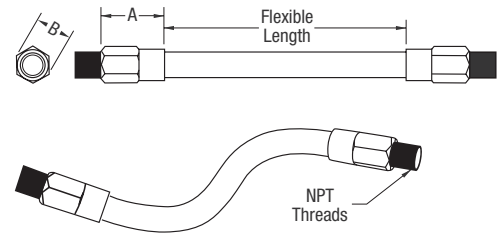

Dimensions


XP Flex™ Range

Explosion-proof Flexible Couplings - Metric Thread / Materials: Bronze construction with brass fittings

Part No.	NPT Thread Size (inch)	Flexible Length (mm)	Dimensions	
			A	B
XPLFL16	1/2	150	39.1	36.6
XPLFL18	1/2	200	39.1	36.6
XPLFL110	1/2	250	39.1	36.6
XPLFL112	1/2	300	39.1	36.6
XPLFL115	1/2	380	39.1	36.6
XPLFL118	1/2	460	39.1	36.6
XPLFL124	1/2	610	39.1	36.6
XPLFL212	3/4	300	40.6	47.5
XPLFL215	3/4	380	40.6	47.5
XPLFL218	3/4	460	40.6	47.5
XPLFL224	3/4	610	40.6	47.5
XPLFL236	3/4	915	40.6	47.5
XPLFL318	1	460	50.08	58.7

Explosion-proof and dust-ignition-proof for use in hazardous locations

With their flexible design, T&B® XP Flex™ couplings make it easy to achieve tight bends in conduit systems in confined spaces - or to connect stationary equipment to equipment that moves or vibrates. Their explosion-proof and corrosion-resistant construction mean you can use them with confidence in hazardous and wet locations.

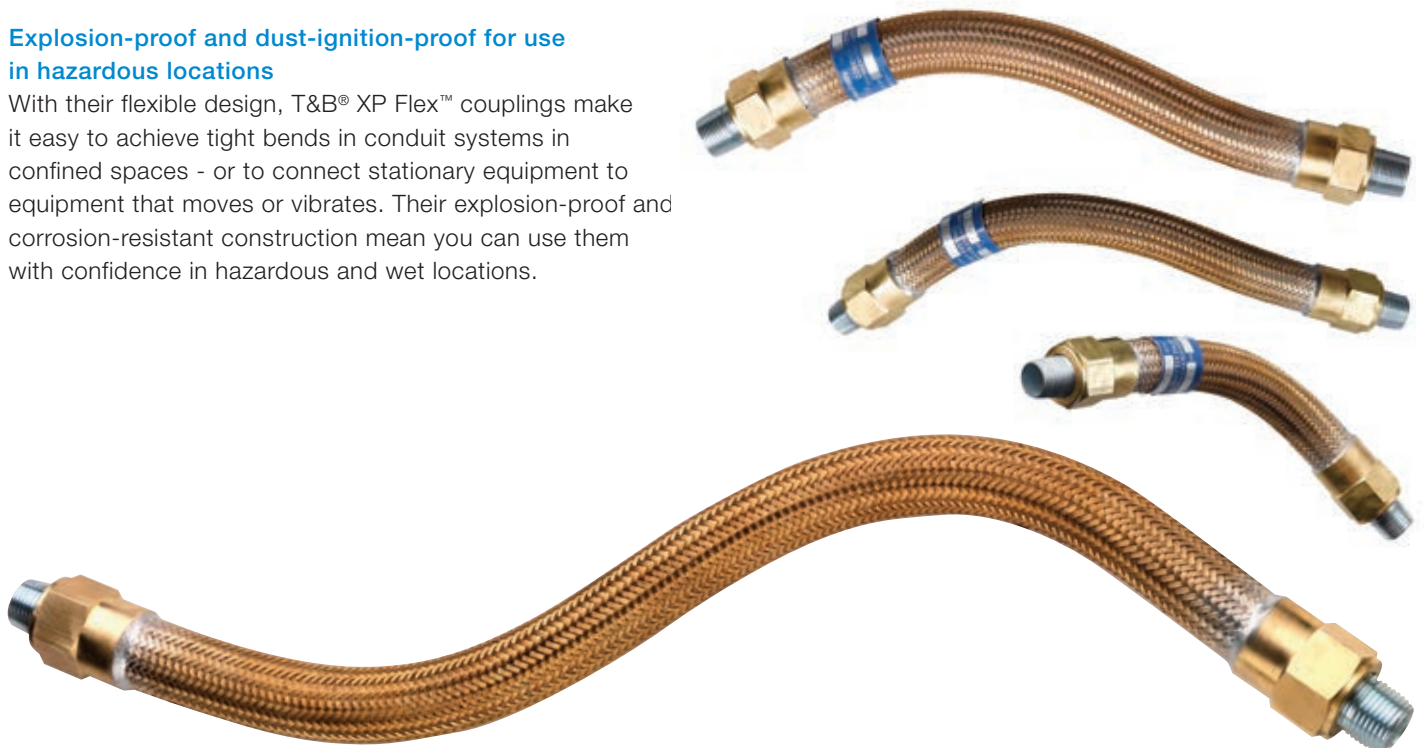

Cable glands for hazardous areas

Cable Glands

Cable glands - Selection guide	3/2
C1 Series - Ex d e double compression cable gland	3/4
C2 Series - Ex d e single compression cable gland	3/6
C3 Series - Ex d e single compression cable gland	3/8
C4 Series - Ex d e unarmoured compound barrier flameproof cable gland	3/10
C5 Series - Ex d e armoured compound barrier flameproof cable gland	3/12
C6 Series - Ex d e Single compression EMC cable gland	3/14
Ex e Nylon cable gland	3/16
ISR Series - Industrial strain relief fitting	3/18
Star Teck XP® (STX) Series	3/20
Star Teck Extreme XP® (STEX) Series	3/22

Cable glands for hazardous areas

Cable glands - Selection guide



Ex d & Ex e Cable glands

Type	Ex d e Armoured cable glands	Ex d e Unarmoured cable glands	Ex d cable glands	Ex d e Flameproof unarmoured cable glands	Ex d e Flameproof armoured cable glands	Ex d e EMC cable glands	Ex e Nylon cable glands	ISR series Industrial strain relief fitting
------	------------------------------	--------------------------------	-------------------	---	---	-------------------------	-------------------------	---

Approvals

ATEX	•	•	•	•	•	•	•	•
IEC / IECEx	•	•	•	•	•	•	•	•
CSA	-	-	-	-	-	-	-	•
UL	•	•	-	-	-	-	-	-

Protection Type

Ex e	•	•	•	•	•	•	•	•
Ex d	•	•	•	•	•	-	•	-
Ex ta	-	-	-	-	-	-	-	•
Ex tb	•	•	•	•	•	•	•	-

Zones

Zone 1	•	•	•	•	•	•	•	•
Zone 2	•	•	•	•	•	•	•	•
Zone 20	-	-	-	-	-	-	-	•
Zone 21	•	•	•	•	•	•	•	•
Zone 22	•	•	•	•	•	•	•	•

Class / Division

Class I / Div 1	-	-	-	-	-	-	-	-
Class I / Div 2	-	-	-	-	-	-	-	•
Class II / Div 1	-	-	-	-	-	-	-	-
Class II / Div 2	-	-	-	-	-	-	-	•
Class III / Div 1	-	-	-	-	-	-	-	-
Class III / Div 2	-	-	-	-	-	-	-	•

Section 3 / Page No.	3/4	3/6	3/8	3/10	3/12	3/14	3/16	3/18
----------------------	-----	-----	-----	------	------	------	------	------



Cable glands for Teck cable

Star Teck XP® (STX) series	Star Teck Extreme XP® (STEX) series
-------------------------------	---

-	-
-	-
•	•
•	•

-	-
-	-
-	-
-	-

-	-
-	-
-	-
-	-
-	-

•	•
•	•
•	•
•	•
•	•
•	•

3/20	3/22
------	------

Cable glands for hazardous areas

C1 Series - Ex d e double compression cable gland


3



Features

- 4 function double compression cable gland
- Suitable for use with SWA (Steel Wire Armoured), SWB (Steel Wire Braid) or AWA (Aluminium Wire Armoured)
- Flameproof Ex d and increased safety Ex e
- Available in brass, nickel plated brass and stainless steel 316
- Wide range of cable sizes


Certifications

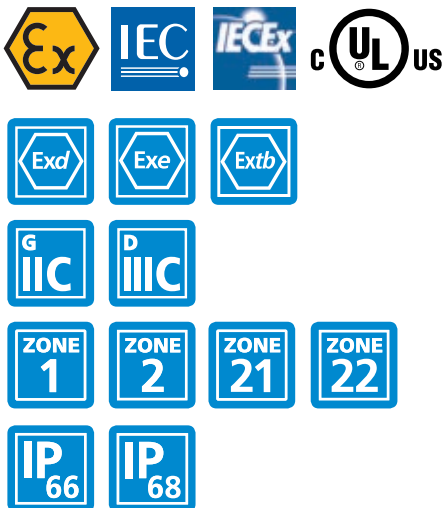


Standards

Approved to:	IEC EN60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	CESI 13 ATEX 041X, IECEx CES 13.0014X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-40°C to +100°C
IP test:	IP66-68 (5-Bar 30 mins)

Dimensional diagrams

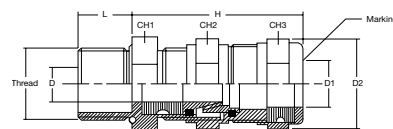

Metric Thread



NPT Thread

Cable glands for hazardous areas

C1 Series - Ex d e double compression cable gland

C1 Series

Ex d e Double Compression Cable Gland - Metric Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Sealing Range (mm)		Cable Gland Dimensions (mm)						Torque (Nm)	
		D (min-max)	D1 (min-max)	H Min	L Min	CH1	CH2	CH3	D2 Min	CH2	CH3
Nickel Plated Brass											
EXN03MSC1	M16 x 1.5	3 - 8.5	6 - 12	47	16	22	26	26	29	27.0	25.0
EXN03MMC1	M16 x 1.5	6 - 12	8.5 - 16	48	16	25	29	29	31.5	49.0	28.0
EXN04MSC1	M20 x 1.5	3 - 8.5	6 - 12	47	16	24	26	26	29	27.0	25.0
EXN04MMC1	M20 x 1.5	6 - 12	8.5 - 16	47	16	25	29	29	31.5	49.0	28.0
EXN04MLC1	M20 x 1.5	12 - 14.5	16 - 20	50	16	28	30	32	35	33.0	33.0
EXN05MSC1	M25 x 1.5	6 - 12	8.5 - 16	48	18	29	29	29	31.5	49.0	28.0
EXN05MMC1	M25 x 1.5	12 - 16	16 - 21	53	18	32	34	34	37	30.0	27.0
EXN05MLC1	M25 x 1.5	12 - 20	16 - 26	60	18	36	40	40	44	61.0	32.0
EXN06MSC1	M32 x 1.5	12 - 20	16 - 26	62	18	40	40	40	44	61.0	32.0
EXN06MMC1	M32 x 1.5	15 - 26	20 - 33	78	18	48	52	52	57	86.0	40.0
EXN07MSC1	M40 x 1.5	15 - 26	20 - 33	78	18	48	52	52	57	86.0	40.0
EXN07MMC1	M40 x 1.5	20 - 32	29 - 41	89	18	55	60	60	66	110.0	75.0
EXN08MSC1	M50 x 1.5	22 - 35	33 - 48	97	18	60	70	75	82	110.0	75.0
EXN08MMC1	M50 x 1.5	27 - 41	36 - 52	100	18	70	70	74	83	125.0	75.0
EXN09MSC1	M63 x 1.5	35 - 45	43 - 57	106	20	75	80	80	89.5	160.0	140.0
EXN09MMC1	M63 x 1.5	40 - 52	47 - 60	107	20	85	85	85	94	250.0	100.0
EXN10MSC1	M75 x 1.5	40 - 52	47 - 60	107	20	85	85	85	94	250.0	100.0
EXN10MMC1	M75 x 1.5	45 - 60	54 - 70	125	20	90	95	100	110.5	250.0	150.0
EXN11MSC1	M90 x 1.5	45 - 60	54 - 70	125	20	95	95	100	110.5	250.0	150.0
EXN11MMC1	M90 x 1.5	60 - 72	63 - 80	154	20	110	115	115	127	320.0	210.0

Ex d e Double Compression Cable Gland - NPT Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Sealing Range (mm)		Cable Gland Dimensions (mm)						Torque (Nm)	
		D (min-max)	D1 (min-max)	H Min	L Min	CH1	CH2	CH3	D2 Min	CH2	CH3
Nickel Plated Brass											
EXN03ASC1	3/8"	3 - 8.5	6 - 12	47	16	22	26	26	29	27.0	25.0
EXN03AMC1	3/8"	6 - 12	8.5 - 16	48	16	25	29	29	31.5	49.0	28.0
EXN04ASC1	1/2"	3 - 8.5	6 - 12	47	21	24	26	26	29	27.0	25.0
EXN04AMC1	1/2"	6 - 12	8.5 - 16	47	21	25	29	29	31.5	49.0	28.0
EXN04ALC1	1/2"	12 - 14.5	16 - 20	50	21	28	30	32	35	33.0	33.0
EXN05ASC1	3/4"	6 - 12	8.5 - 16	48	21	29	29	29	31.5	49.0	28.0
EXN05AMC1	3/4"	12 - 16	16 - 21	53	21	32	34	34	37	30.0	27.0
EXN05ALC1	3/4"	12 - 20	16 - 26	60	21	36	40	40	44	61.0	32.0
EXN06ASC1	1"	12 - 20	16 - 26	62	26	40	40	40	44	61.0	32.0
EXN06AMC1	1"	15 - 26	20 - 33	78	26	48	52	52	57	86.0	40.0
EXN07ASC1	1 1/4"	15 - 26	20 - 33	78	28	48	52	52	57	86.0	40.0
EXN07AMC1	1 1/4"	20 - 32	29 - 41	89	28	55	60	60	66	110.0	75.0
EXN08ASC1	1 1/2"	22 - 35	33 - 48	97	28	60	70	75	82	110.0	75.0
EXN08AMC1	1 1/2"	27 - 41	36 - 52	100	28	70	70	74	83	125.0	75.0
EXN09ASC1	2"	35 - 45	43 - 57	106	28	75	80	80	89.5	160.0	140.0
EXN09AMC1	2"	40 - 52	47 - 60	107	28	85	85	85	94	250.0	100.0
EXN10ASC1	2 1/2"	40 - 52	47 - 60	107	41	85	85	85	94	250.0	100.0
EXN10AMC1	2 1/2"	45 - 60	54 - 70	125	41	90	95	100	110.5	250.0	150.0
EXN11ASC1	3"	45 - 60	54 - 70	125	43	95	95	100	110.5	250.0	150.0
EXN11AMC1	3"	60 - 72	63 - 80	154	43	110	115	115	127	320.0	210.0

* For Brass version, remove N to the reference, e.g. EX03MSC1 for Metric / EX03ASC1 for NPT

** For Stainless Steel version, add S to the reference, e.g. EXS03MSC1 for Metric / EXS03ASC1 for NPT

*** To purchase cable glands with locknuts, shrouds, earth tags, and washers where appropriate add a K to the end of the part number, e.g. EX04MMC1K

Cable glands for hazardous areas

C2 Series - Ex d e single compression cable gland


3



Features

- Flameproof Ex d and increased safety Ex e
- Available in brass, nickel plated brass and stainless steel 316
- Wide range of cable sizes
- Kits available


Certifications

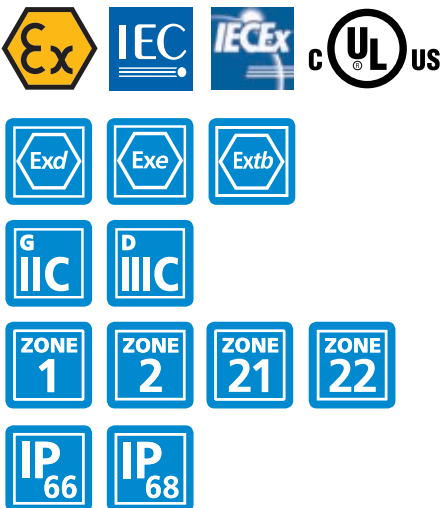


Standards

Approved to:	IEC EN 60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	IMQ 14 ATEX 013X IECEx IMQ14.0005X Ex d IIC Gb, Ex e IIC Gb Ex tb IIC Db
Safe operating temperature range:	-40°C to +80°C
IP test:	IP66-68 (5-Bar 30 mins)

Dimensional diagrams

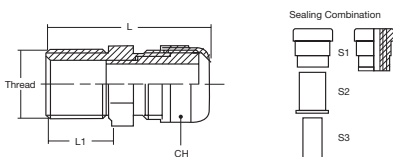

Metric Thread



NPT Thread

Cable glands for hazardous areas

C2 Series - Ex d e single compression cable gland

C2 Series

Ex d e Single Compression Cable Gland - Metric Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Cable Gland Dimensions (mm)			Sealing Ring Dimensions (mm)				Torque (Nm)		
		L	L1 Min	GH (body / cap)	Min-Max	S1+S2+S3	S1+S2	S1	S1+S2+S3	S1+S2	S1
Nickel Plated Brass											
EXN03MMC2	M16 x 1.5	40	16	22	4,0 - 12,0	4-6	6-9	9-12	20	18	15
EXN04MMC2	M20 x 1.5	40	16	22	4,0 - 12,0	4-6	6-9	9-12	20	18	15
EXN04MLC2	M20 x 1.5	45	16	28	10,0 - 16,0	10 - 12	12 - 14,5	14,5 - 16	24	22	18
EXN05MMC2	M25 x 1.5	40	16	28	10,0 - 18,0	10 - 12	12 - 14,5	14,5 - 18	25	22	18
EXN05MLC2	M25 x 1.5	50	16	35	14,0 - 20,0	14 - 17	17 - 20	-	26	22	-
EXN06MMC2	M32 x 1.5	43	16	35	14,0 - 24,0	14 - 17	17 - 20	20 - 24	28	23	20
EXN06MLC2	M32 x 1.5	53	16	45	22,0 - 28,0	22 - 24	24 - 27	27 - 28	45	40	35
EXN07MMC2	M40 x 1.5	45	18	45	22,0 - 32,0	22 - 24	24 - 27	27 - 32	56	50	45
EXN07MLC2	M40 x 1.5	55	18	50	26,0 - 34,0	26 - 28	28 - 31	31 - 34	57	55	52
EXN08MSC2	M50 x 1.5	46	18	55/50	26,0 - 35,0	26 - 28	28 - 31	31 - 35	57	55	52
EXN08MMC2	M50 x 1.5	63	18	64	35,0 - 44,0	35 - 38	38 - 41	41 - 44	190	155	140
EXN09MSC2	M63 x 1.5	53	18	68/64	35,0 - 45,0	35 - 38	38 - 41	41 - 45	190	155	140
EXN09MMC2	M63 x 1.5	62	18	75/80	46,0 - 56,0	46 - 48	48 - 52	52 - 56	160	145	135
EXN10MSC2	M75 x 1.5	64	20	80	46,0 - 62,0	46 - 51	51 - 57	57 - 62	185	175	150
EXN10MMC2	M75 x 1.5	75	20	95	60,0 - 70,0	60 - 63	63 - 69	69 - 70	123	118	107
EXN11MSC2	M90 x 1.5	75	20	95	60,0 - 70,0	60 - 63	63 - 69	69 - 70	123	118	107
EXN11MMC2	M90 x 1.5	77	20	105	75,0 - 85,0	75 - 79	79 - 82	82 - 85	135	130	125
EXN12MSC2	M100 x 1.5	77	20	105	75,0 - 85,0	75 - 79	79 - 82	82 - 85	135	130	125
EXN12MMC2	M110 x 1.5	77	20	115	85,0 - 95,0	85 - 89	89 - 92	92 - 95	180	175	170

Ex d e Single Compression Cable Gland - NPT Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Cable Gland Dimensions (mm)			Sealing Ring Dimensions (mm)				Torque (Nm)		
		L	L1 Min	GH (body / cap)	Min-Max	S1+S2+S3	S1+S2	S1	S1+S2+S3	S1+S2	S1
Nickel Plated Brass											
EXN03AMC2	3/8"	40	16	22	4,0 - 12,0	4 - 6	6 - 9	9 - 12	20	18	15
EXN04AMC2	1/2"	40	16	22	4,0 - 12,0	4 - 6	6 - 9	9 - 12	20	18	15
EXN04ALC2	1/2"	45	16	28	10,0 - 16,0	10 - 12	12 - 14,5	14,5 - 16	24	22	18
EXN05AMC2	3/4"	40	16	28	10,0 - 18,0	10 - 12	12 - 14,5	14,5 - 18	25	22	18
EXN05ALC2	3/4"	50	16	35	14,0 - 20,0	14 - 17	17 - 20	-	26	22	-
EXN06AMC2	1"	43	20	35	14,0 - 24,0	14 - 17	17 - 20	20 - 24	28	23	20
EXN06ALC2	1"	53	20	45	22,0 - 26,0	22 - 24	24 - 26	-	45	40	35
EXN07AMC2	1 1/4"	45	20	45	22,0 - 32,0	22 - 24	24 - 27	27 - 32	56	50	45
EXN07ALC2	1 1/4"	55	20	50	26,0 - 34,0	26 - 28	28 - 31	31 - 34	57	55	52
EXN08ASC2	1 1/2"	46	20	55/50	26,0 - 35,0	26 - 28	28 - 31	31 - 35	57	55	52
EXN08AMC2	1 1/2"	63	20	64	35,0 - 41,0	35 - 38	38 - 41	-	190	155	140
EXN09ASC2	2"	53	20	68/64	35,0 - 45,0	35 - 38	38 - 41	41 - 45	190	155	140
EXN09AMC2	2"	62	20	75/80	45,0 - 56,0	46 - 48	48 - 52	52 - 56	160	145	135
EXN10ASC2	2 1/2"	64	21	80	46,0 - 62,0	46 - 51	51 - 57	57 - 62	185	175	150
EXN10AMC2	2 1/2"	75	21	95	60,0 - 70,0	60 - 63	63 - 69	69 - 70	123	118	107
EXN11ASC2	3"	75	21	95	60,0 - 70,0	60 - 63	63 - 69	69 - 70	123	118	107
EXN11AMC2	3"	77	21	105	75,0 - 85,0	75 - 79	79 - 82	82 - 85	135	130	125
EXN12ASC2	4"	77	21	115/105	75,0 - 85,0	75 - 79	79 - 82	82 - 85	135	130	125
EXN12AMC2	4"	77	21	115	85,0 - 95,0	85 - 89	89 - 92	92 - 95	180	175	170

* For Brass version, remove N to the reference, e.g. EX03MMC2 for Metric / EX03AMC2 for NPT

** For Stainless Steel version, add S to the reference, e.g. EXS03MMC2 for Metric / EXS03AMC2 for NPT

*** To purchase cable glands with locknuts, shrouds, earth tags, and washers where appropriate add a K to the end of the part number, e.g. EX03MMC2K

Cable glands for hazardous areas

C3 Series - Ex d single compression cable gland

3



Features

- Flameproof Ex d and increased safety Ex e
- Available in brass, nickel plated brass and stainless steel 316
- Deluge proof
- Wide range of cable sizes
- Kits available


Certifications




Standards

Approved to:	IEC EN60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	CESI 13 ATEX 041X, IECEx CES 13.0014X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-40°C to +100°C
IP test:	IP66-68 (5-Bar 30 mins)

Dimensional diagrams



Metric Thread



NPT Thread

Cable glands for hazardous areas

C3 Series - Ex d single compression cable gland

C3 Series

Ex d Single Compression Cable Gland - Metric Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Sealing Range (mm)		Cable Gland Dimensions (mm)				Torque (Nm)
		D (min-max)	D1 (min)	H Min	L Min	CH1	CH2	CH2
Nickel Plated Brass								
EXN03MSC3	M16 x 1.5	3 - 8.5	29	25	16	22	26	31
EXN03MMC3	M16 x 1.5	6 - 12	31.5	28.5	16	25	29	35
EXN04MSC3	M20 x 1.5	6 - 12	31.5	27.5	16	25	29	35
EXN04MMC3	M20 x 1.5	12 - 14.5	33.5	29	16	28	30	33
EXN05MSC3	M25 x 1.5	6 - 12	31.5	28.5	18	29	29	35
EXN05MMC3	M25 x 1.5	12 - 16	37	28.5	18	32	35	30
EXN05MLC3	M25 x 1.5	12 - 20	44.5	32.5	18	36	40	61
EXN06MSC3	M32 x 1.5	12 - 20	44.5	33.5	18	40	40	61
EXN06MMC3	M32 x 1.5	15 - 26	57	41	18	48	52	86
EXN07MSC3	M40 x 1.5	15 - 26	57	41	18	48	52	86
EXN07MMC3	M40 x 1.5	20 - 32	66	50	18	55	60	110
EXN08MSC3	M50 x 1.5	22 - 35	77	50.5	18	60	70	110
EXN08MMC3	M50 x 1.5	27 - 41	77	54	18	70	70	125
EXN09MSC3	M63 x 1.5	35 - 45	89.5	61.5	20	75	80	165
EXN09MMC3	M63 x 1.5	40 - 52	94	61.5	20	85	85	250
EXN10MSC3	M75 x 1.5	40 - 52	94	61.5	20	85	85	250
EXN10MMC3	M75 x 1.5	45 - 60	105	72	20	90	95	250
EXN11MSC3	M90 x 1.5	45 - 60	105	72	20	95	95	250
EXN11MMC3	M90 x 1.5	60 - 72	127	84	20	110	115	300

Ex d Single Compression Cable Gland - NPT Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Sealing Range (mm)		Cable Gland Dimensions (mm)				Torque (Nm)
		D (min-max)	D1 (min)	H Min	L Min	CH1	CH2	CH2
Nickel Plated Brass								
EXN03ASC3	3/8"	3 - 8.5	29	25	16	22	26	31
EXN03AMC3	3/8"	6 - 12	31.5	28.5	16	25	29	35
EXN04ASC3	1/2"	6 - 12	31.5	27.5	21	25	29	35
EXN04AMC3	1/2"	12 - 14.5	33.5	29	21	28	30	33
EXN05ASC3	3/4"	6 - 12	31.5	28.5	21	29	29	35
EXN05AMC3	3/4"	12 - 16	37	28.5	21	32	35	30
EXN05ALC3	3/4"	12 - 20	44.5	32.5	21	36	40	61
EXN06ASC3	1"	12 - 20	44.5	33.5	26	40	40	61
EXN06AMC3	1"	15 - 26	57	41	26	48	52	86
EXN07ASC3	1 1/4"	15 - 26	57	41	28	48	52	86
EXN07AMC3	1 1/4"	20 - 32	66	50	28	55	60	110
EXN08ASC3	1 1/2"	22 - 35	77	50.5	28	60	70	110
EXN08AMC3	1 1/2"	27 - 41	77	54	28	70	70	125
EXN09ASC3	2"	35 - 45	89.5	61.5	28	75	80	165
EXN09AMC3	2"	40 - 52	94	61.5	28	85	85	250
EXN10ASC3	2 1/2"	40 - 52	94	61.5	41	85	85	250
EXN10AMC3	2 1/2"	45 - 60	105	72	41	90	95	250
EXN11ASC3	3"	45 - 60	105	72	43	95	95	250
EXN11AMC3	3"	60 - 72	127	84	43	110	115	300

* For Brass version, remove N to the reference, e.g. EX03MMC2 for Metric / EX03AMC2 for NPT

** For Stainless Steel version, add S to the reference, e.g. EXS03MMC2 for Metric / EXS03AMC2 for NPT

*** To purchase cable glands with locknuts, shrouds, earth tags, and washers where appropriate add a K to the end of the part number, e.g. EX03MMC2K

Cable glands for hazardous areas

C4 Series - Ex d e unarmoured compound barrier flameproof cable gland

3



Features

- A compound barrier cable gland for use with unarmoured cable
- Suitable for use in Zones 1, 2, 21, 22
- Flameproof Ex d and increased safety Ex e
- Available in brass, nickel plated brass and stainless steel 316
- Wide range of cable sizes


Certifications




Standards

Approved to:	IEC EN60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	CESI 14 ATEX 032X, IECEx CES 13.0014X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-60°C to +100°C
IP test:	IP66

Dimensional diagrams



Metric Thread



NPT Thread

Cable glands for hazardous areas

C4 Series - Ex d e unarmoured compound barrier flameproof cable gland

C4 Series

Ex d e Unarmoured Compound Barrier Flameproof Cable Gland - Metric Thread / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Cable Gland Dimensions (mm)								Cable Diameter Range Min-Max (mm)	Torque (Nm)	
		H	TL	øD	øD1	øD2	SW1	SW2	SW3		SW2	SW3
Nickel Plated Brass												
EXN04MC4	M20 x 1.5	62	16	33	16.5	14	30	30	30	8.5-16.0	30.0	28.0
EXN05MC4	M25 x 1.5	62.8	16	37	21.5	18.5	34	34	34	16.0-21.0	45.0	27.0
EXN06MC4	M32 x 1.5	68.5	16	45	26.5	25.6	42	42	40	16.0-26.0	65.0	32.0
EXN07MC4	M40 x 1.5	75.1	16	66	41.5	33	50	60	60	29.0-41.0	75.0	75.0
EXN08MC4	M50 x 1.5	82.7	16	77	48.5	43	60	70	75	33.0-48.0	90.0	75.0
EXN09MC4	M63 x 1.5	96	16	77	52.5	52	70	70	74	36.0-52.0	100.0	75.0

* For Nickel Plated Brass version, add 'N' to the reference, e.g. EXN04MC4 for Metric, for Stainless Steel 316 version, add 'S' to the reference, e.g. EXS04MC4 for Metric

Ex d e Unarmoured Compound Barrier Flameproof Cable Gland - NPT Thread / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Cable Gland Dimensions (mm)								Cable Diameter Range Min-Max (mm)	Torque (Nm)	
		H	TL	øD	øD1	øD2	SW1	SW2	SW3		SW2	SW3
Nickel Plated Brass												
EXN04AC4	1/2"	62	21	33	16.5	14	30	30	30	8.5-16.0	30.0	28.0
EXN05AC4	3/4"	62.8	21	37	21.5	18.5	34	34	34	16.0-21.0	45.0	27.0
EXN06AC4	1"	68.5	26	45	26.5	25.6	42	42	40	16.0-26.0	65.0	32.0
EXN07AC4	1 1/4"	75.1	28	66	41.5	33	50	60	60	29.0-41.0	75.0	75.0
EXN08AC4	1 1/2"	82.7	28	77	48.5	43	60	70	75	33.0-48.0	90.0	75.0
EXN09AC4	2"	96	28	77	52.5	52	70	70	74	36.0-52.0	100.0	75.0

* For Brass version, remove N to the reference, e.g. EX03MMC2 for Metric / EX03AMC2 for NPT

** For Stainless Steel version, add S to the reference, e.g. EXS03MMC2 for Metric / EXS03AMC2 for NPT

Cable glands for hazardous areas

C5 Series - Ex d e armoured compound barrier flameproof cable gland

3



Features

- A compound barrier cable gland for use with SWA (Steel wired Armoured), AWB (Aluminium wired Braid) or AWA (Aluminium wired Armoured)
- Suitable for use in Zones 1, 2, 21, 22
- Flameproof Ex d and increased safety Ex e
- Available in brass, nickel plated brass and stainless steel 316
- Wide range of cable sizes


Certifications




Standards

Approved to:	IEC EN60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	CESI 14 ATEX 032X, IECEx CES 14.0013X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-60°C to +100°C
IP test:	IP66

Dimensional diagrams



Metric Thread



NPT Thread

Cable glands for hazardous areas

C5 Series - Ex d e armoured compound barrier flameproof cable gland

C4 Series

Ex d e Armoured Compound Barrier Flameproof Cable Gland - Metric Thread / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Cable Gland Dimensions (mm)								Cable Diameter Range Min-Max (mm)	Torque (Nm)	
		H	TL	øD	øD1	øD2	SW1	SW2	SW3		SW2	SW3
Nickel Plated Brass												
EXN04MC5	M20 x 1.5	70	16	33	16.5	14	30	30	29	8.5-16.0	30.0	28.0
EXN05MC5	M25 x 1.5	72.1	16	37	21.5	15.5	34	34	34	16.0-21.0	45.0	27.0
EXN06MC5	M32 x 1.5	76	16	45	26.5	25.6	42	42	40	16.0-26.0	65.0	32.0
EXN07MC5	M40 x 1.5	83.4	16	66	41.5	33	50	60	60	29.0-41.0	75.0	75.0
EXN08MC4	M50 x 1.5	96.6	16	77	48.5	43	60	70	75	33.0-48.0	90.0	75.0
EXN09MC4	M63 x 1.5	109.5	16	77	52.5	52	70	70	74	36.0-52.0	100.0	75.0

Ex d e Armoured Compound Barrier Flameproof Cable Gland - NPT Thread / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Cable Gland Dimensions (mm)								Cable Diameter Range Min-Max (mm)	Torque (Nm)	
		H	TL	øD	øD1	øD2	SW1	SW2	SW3		SW2	SW3
Nickel Plated Brass												
EXN04AC5	1/2"	70	21	33	16.5	14	30	30	30	8.5-16.0	30.0	28.0
EXN05AC5	3/4"	72.1	21	37	21.5	15.5	34	34	34	16.0-21.0	45.0	27.0
EXN06AC5	1"	76	26	45	26.5	25.6	42	42	40	16.0-26.0	65.0	32.0
EXN07AC5	1 1/4"	83.4	28	66	41.5	33	50	60	60	29.0-41.0	75.0	75.0
EXN08AC5	1 1/2"	96.6	28	77	48.5	43	60	70	75	33.0-48.0	90.0	75.0
EXN09AC5	2"	109.5	28	77	52.5	52	70	70	74	36.0-52.0	100.0	75.0

* For brass version, remove N to the reference, e.g. EX04MC4 for Metric / EX04AC4 for NPT

** For stainless steel 316 version, add S to the reference, e.g. EXS04MC4 for Metric / EXS04AC4 for NPT

Cable glands for hazardous areas

C6 Series - Ex d e Single Compression EMC Metric Cable Gland

3



Features

- Suitable for use with EMC/Shielded cables
- Ex d and Ex e
- Available in brass, nickel plated brass & stainless steel 316
- Large cable range within one product with removeable seals


Certifications




Standards

Approved to:	IEC EN60079-0, 60079-1, 60079-7, 60079-31
EC Type examination certificate to:	CESI 13 ATEX 041X, IECEx CES 13.0014X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db
Safe operating temperature range:	-40°C to +100°C
IP test:	IP66-68

Dimensional diagrams



Metric Thread



NPT Thread

Cable glands for hazardous areas

C6 Series - Ex d e Single Compression EMC Metric Cable Gland

C6 Series

Ex d e Single Compression EMC NPT Cable Gland - Metric Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	Metric Thread Size	Cable Gland Dimensions (mm)			Sealing Ring Dimensions (mm)				Torque (Nm)		
		L	L1 Min	GH (body / cap)	Min-Max	S1+S2+S3	S1+S2	S1	S1+S2+S3	S1+S2	S1
Nickel Plated Brass											
EXN03MSC6	M16 x 1.5	44.5	16	20	4-8	–	4-6	6-8	–	25	18
EXN03MMC6	M16 x 1.5	44.5	16	22	4-8	–	4-6	6-8	20	18	15
EXN04MMC6	M20 x 1.5	44.5	18	22	4-12	4-6	6-9	9-12	20	18	15
EXN05MMC6	M25 x 1.5	46	16	28	10-18	10-12	12-14.5	14.5-18	25	22	18
EXN06MMC6	M32 x 1.5	52	19	35	14-24	14-17	17-20	20-24	25	20	18
EXN07MMC6	M40 x 1.5	61	20	45	22-32	22-24	24-27	27-32	56	50	45
EXN08MMC6	M50 x 1.5	63.5	20	55/50	26-35	26-28	28-31	31-35	57	55	52

Ex d e Single Compression EMC NPT Cable Gland - NPT Thread / Materials: Brass, Nickel plated brass or Stainless steel 316

Part No.	NPT Thread Size (inch)	Cable Gland Dimensions (mm)			Sealing Ring Dimensions (mm)				Torque (Nm)		
		L	L1 Min	GH (body / cap)	Min-Max	S1+S2+S3	S1+S2	S1	S1+S2+S3	S1+S2	S1
Nickel Plated Brass											
EXN03ASC6	3/8"	44.5	16	20	4-8	–	4-6	6-8	–	25	18
EXN03AMC6	3/8"	44.5	16	22	4-8	–	4-6	6-8	20	18	15
EXN04AMC6	1/2"	44.5	18	22	4-12	4-6	6-9	9-12	20	18	15
EXN05AMC6	3/4"	46	16	28	10-18	10-12	12-14.5	14.5-18	25	22	18
EXN06AMC6	1"	52	19	35	14-24	14-17	17-20	20-24	25	20	18
EXN07AMC6	1 1/4"	61	20	45	22-32	22-24	24-27	27-32	56	50	45
EXN08AMC6	1 1/2"	63.5	20	55/50	26-35	26-28	28-31	31-35	57	55	52

* For Brass version, remove N to the reference, e.g. EX03MMC6 for Metric / EX03AMC6 for NPT

** For Stainless Steel version, add S to the reference, e.g. EXS03MMC6 for Metric / EXS03AMC6 for NPT

*** To purchase cable glands with locknuts, shrouds, earth tags, and washers where appropriate add a K to the end of the part number, e.g. EX03ASC6K

Cable glands for hazardous areas

Ex e Nylon cable gland


3



Features

- Suitable for potentially explosive gas atmospheres
- Increased safety “e” and intrinsic safety “i”


Certifications

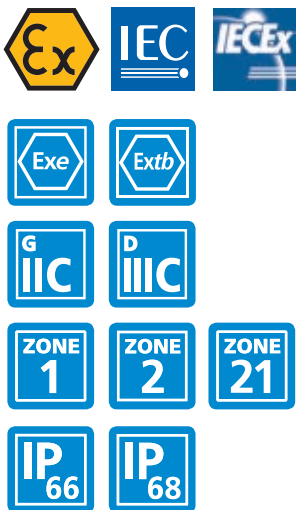

Standards

Approved to:	IEC EN60079-0, 60079-7, 60079-11, 60079-31
EC Type examination certificate to:	IMQ 13 ATEX 016X, IECEx IMQ 13.0005X Ex e IIC Gb Ex tb IIC Db
Safe operating temperature range:	-40°C to +80°C
IP test:	IP66-68

Dimensional diagrams



Cable glands for hazardous areas

Ex e Nylon cable gland

Nylon Cable Gland

Ex e Nylon Cable Gland - Metric Thread / Materials: Nylon

Part No.	Metric Thread Size	Cable Diameter Range (min-max)	Cable Gland Dimensions (mm)				Torque (Nm)
			L	H Min	CH	CH1	
EXCGM20S	20	6-12	10	40	24	24	5
EXCGM20SL	20	6-12	15	45	24	24	5
EXCGM20M	20	10-14	10	42	27	27	5.5
EXCGM20ML	20	10-14	15	50	27	27	5.5
EXCGM25S	25	13-18	10	47	33	33	7
EXCGM25SL	25	13-18	15	50	33	33	7
EXCGM25M	25	11-17	8	42.5	29	29	5
EXCGM32S	32	15-21	10	50	36	36	6
EXCGM32M	32	18-25	15	68	42	42	9
EXCGM40S	40	19-28	10	55	46	46	5
EXCGM40M	40	22-32	18	68	53	53	17
EXCGM50S	50	30-38	18	73	60	60	22
EXCGM63S	63	34-44	18	74	65	65	23

3

Ex e Nylon Cable Gland - NPT Thread / Materials: Nylon

Part No.	NPT Thread Size (inch)	Cable Diameter Range (min-max)	Cable Gland Dimensions (mm)				Torque (Nm)
			L	H Min	CH	CH1	
EXCG050S	1/2"	6-12	15	45	24	24	5
EXCG050M	1/2"	10-14	15	47	27	27	5.5
EXCG075S	3/4"	13-18	15	50	33	33	7
EXCG100S	1"	18-25	18	58	42	42	9

Locknut supplied separately. For high impact fittings please contact sales office

Cable glands for hazardous areas

ISR Series - Industrial strain relief fitting


3



Features

- Globally certified to meet 100% of pullout requirements with no external clamping
- High-strength, corrosion-resistant copper-free aluminum construction (less than 0.4%)
- Suitable for use in Zones 1, 2, 20, 21 and 22
- Superior-quality fitting that reduces installation time & costs
- Wide range of cable sizes


Certifications

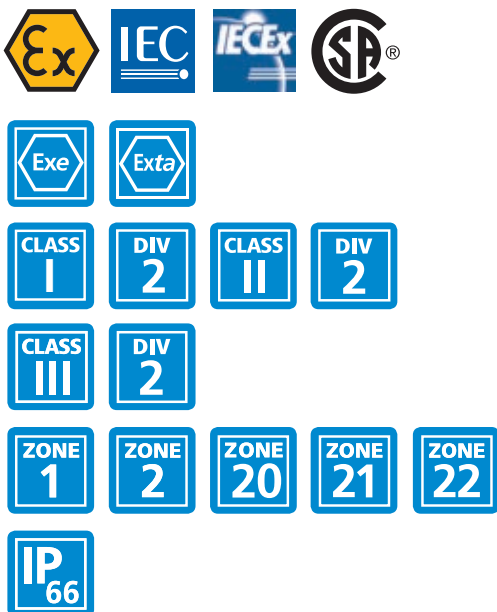

Standards

EC Type examination certificate to:	CSA 14.70009467X, IECEx CSA 14.0035X ATEX (pending) Ex e IIC Gb Ex ta IIIC Da
Safe operating temperature range:	-50°C to 110°C
IP test:	IP66

Dimensional diagrams

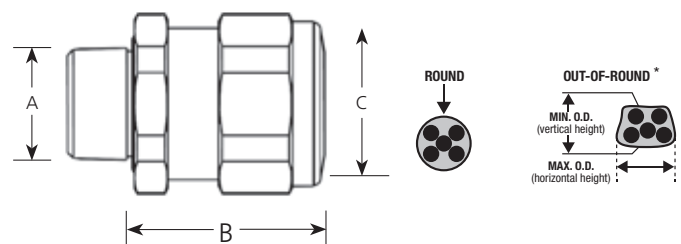

Cable glands for hazardous areas

ISR Series - Industrial strain relief fitting

ISR series

Strain relief fitting - NPT Thread / Materials: Aluminium

Part No.	Hub Size	Torque	Throat Dia.	CABLE DIAMETER (Range over jacket)				A (Thread)	B (Ref.)**	C (O.D.)
				Round		Out of Round*				
				Min. Dia	Max. Dia	Min. Dia	Max. Dia			
ISR050-053	1/2"	400 lbf-in (45.19 Nm)	0.535" (13.59 mm)	0.325" (8.25 mm)	0.525" (13.34 mm)	0.345" (8.76 mm)	0.525" (13.34 mm)	1/2-14 NPT	1.65" (41.91 mm)	1.350" (34.29 mm)
ISR050-062	1/2"	400 lbf-in (45.19 Nm)	0.630" (16.00 mm)	0.425" (10.79 mm)	0.620" (15.75 mm)	0.445" (11.30 mm)	0.620" (15.75 mm)	1/2-14 NPT	1.683" (42.75 mm)	1.500" (38.10 mm)
ISR075-082	3/4"	600 lbf-in (67.79 Nm)	0.825" (20.96 mm)	0.585" (14.86 mm)	0.815" (20.70 mm)	0.625" (15.88 mm)	0.815" (20.70 mm)	3/4-14 NPT	1.790" (45.47 mm)	1.700" (43.18 mm)
ISR100-102	1"	800 lbf-in (90.39 Nm)	1.035" (26.29 mm)	0.785" (19.94 mm)	1.025" (26.04 mm)	0.815" (20.70 mm)	1.025" (26.04 mm)	1-11.5 NPT	1.818" (46.18 mm)	1.900" (48.26 mm)
ISR125-122	1 1/4"	1100 lbf-in (124.28 Nm)	1.225" (31.12 mm)	0.985" (25.02 mm)	1.215" (30.86 mm)	1.025" (26.04 mm)	1.215" (30.86 mm)	1.25-11.5 NPT	1.993" (50.62 mm)	2.320" (58.93 mm)
ISR125-137	1 1/4"	1100 lbf-in (124.28 Nm)	1.380" (35.05 mm)	1.185" (30.10 mm)	1.370" (34.80 mm)	1.225" (31.12 mm)	1.370" (34.80 mm)	1.25-11.5 NPT	1.918" (48.72 mm)	2.320" (58.93 mm)
ISR150-156	1 1/2"	1300 lbf-in (146.88 Nm)	1.560" (39.62 mm)	1.335" (33.91 mm)	1.550" (39.37 mm)	1.375" (34.93 mm)	1.550" (39.37 mm)	1.50-11.5 NPT	1.945" (49.40 mm)	2.580" (65.53 mm)
ISR200-179	2"	1600 lbf-in (180.77 Nm)	1.795" (45.59 mm)	1.525" (38.73 mm)	1.785" (45.34 mm)	1.565" (39.75 mm)	1.785" (45.34 mm)	2-11.5 NPT	2.017" (51.23 mm)	3.012" (76.50 mm)
ISR200-206	2"	1600 lbf-in (180.77 Nm)	2.070" (52.58 mm)	1.755" (44.58 mm)	2.055" (52.20 mm)	1.795" (45.59 mm)	2.055" (52.20 mm)	2-11.5 NPT	2.010" (51.05 mm)	3.200" (81.28 mm)

* Some cables such as tray cable are not perfectly round

** Reference dimension before installation

Cable glands for hazardous areas

Star Teck XP® (STX) Series - Hazardous location glands for Teck cable

3



Features

- Hub has hexagonal shape for dependable tool grip
- Internal splines allow installer to tighten gland nut either on or off enclosure
- Provides grip high up on cable armour, saves installation time and provides dependable grounding
- Tapered bushing to provide secure, tight fit while eliminating cupping in vertical installations
- Low profile gland nut for installation into tight spaces
- Designed to accommodate a broad range of cables


Certifications



Standards

UL listed and CSA certified for hazardous locations:	UL E82038 UL Class I groups A, B, C & D UL Class II E, F & G, Div 1 CSA 023086 Class I Div 1 & 2, groups A, B, C & D Class II Div 1 & 2, groups E, F & G Class III Types 4x, 6P
---	---

Dimensional diagrams

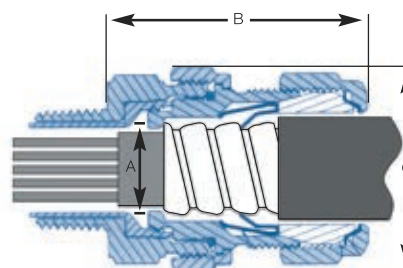

Cable glands for hazardous areas

Star Teck XP® (STX) Series - Hazardous location glands for Teck cable

Star Teck XP® (STX) series

Hazardous Location Gland for Teck Cable - NPT Thread / **Materials:** Aluminium or Steel

Part No.	NPT Hub Size (inch)	Max. Volume of Sealing Compound (cm ³)	Range Over Jacket (inches)		Cable Gland Dimensions (inches)		
			Min.	Max.	A	B**	C
STX050-462*	1/2	5	0.525	0.650	0.395	2.50	1.63
STX050-464*	1/2	5	0.600	0.760	0.485	2.50	1.63
STX075-465*	3/4	8	0.725	0.885	0.607	2.62	1.82
STX075-466*	3/4	8	0.825	0.985	0.715	2.62	1.82
STX100-467*	1	16	0.880	1.065	0.750	2.83	2.30
STX100-468*	1	16	1.025	1.205	0.895	2.83	2.30
STX125-469*	1 1/4	23	1.187	1.375	1.057	3.05	2.51
STX150-470*	1 1/2	43	1.350	1.625	1.177	3.76	3.26
STX150-550*	1 1/2	43	1.500	1.625	1.365	3.76	3.26
STX150-471*	1 1/2	43	1.600	1.875	1.465	3.76	3.26
STX200-472*	2	72	1.700	1.965	1.552	4.05	3.62
STX200-473*	2	72	1.900	2.187	1.752	4.05	3.62
STX200-474*	2	72	2.100	2.375	1.990	4.15	4.02
STX250-475*	2 1/2	147	2.300	2.565	2.180	4.31	4.58
STX250-476*	2 1/2	147	2.500	2.750	2.360	4.31	4.58
STX300-478*	3	286	2.580	2.840	2.455	5.64	5.10
STX300-479*	3	286	2.790	3.060	2.655	5.80	5.33
STX350-480*	3 1/2	366	3.000	3.270	2.859	6.32	5.79
STX350-481*	3 1/2	366	3.210	3.480	3.057	6.32	5.79
STX400-482*	4	614	3.420	3.690	3.285	6.63	6.19
STX400-483*	4	614	3.610	3.870	3.455	6.63	6.19
STX400-484*	4	614	3.810	4.030	3.625	7.09	6.90
STX400-485*	4	614	3.965	4.185	3.770	7.09	6.90

* For steel version, add 'S' to the reference, e.g. STX050-464S, ** Approximate dimension before installation

Note: Sealing compound not included. Order separately

Sealing Compounds

Part No.	Description	Volume (cm ³)
SC4-KIT-1*	Liquid type sealing compound (includes pouch of sealing compound with customizable nozzle and damming fiber)	50
SC65**	Putty type sealing compound (cut-to-length stick)	34

* Use SC4-KIT-1 liquid compound for shielded cables and all power cables with less than 4 conductors (including ground)

** We do not recommend SC65 for use with shielded cables. Suitable for use on cables with a maximum of four conductors (including ground)

Series Star Teck XP® (STX) range

Star Teck XP® (STX) cable glands are designed to accommodate a broad range of cables, thereby minimizing the possibility of mismatched cables and fittings in the field. They are available in hub sizes from 1/2 to 4 inches, and will handle outer jacket diameters from 0.525 to 4.185 inches.

Cable glands for hazardous areas

Star Teck Extreme XP® (STEX) Series - Range-taking glands for Teck cable

3



Features

- Removable armour stop is factory installed
- Built-in sealing device provides 360° seal when enclosure surface is rough or uneven
- Tapered bushing to provide secure, tight fit while eliminating cupping in vertical installations
- Elastomeric collar ring extends cable diameter range
- Built-in jacket stripping gauge on each fitting
- Low profile gland nut for installation into tight spaces
- Designed to accommodate a broad range of cables


Certifications



Standards

UL listed and CSA certified for hazardous locations:	UL E82038 UL Class I groups A, B, C & D UL Class II E, F & G, Div 2 CSA 023086 Class I Div 1 & 2, groups A, B, C & D Class II Div 1 & 2, groups E, F & G Class III Types 4x, 6P
---	---

Dimensional diagrams

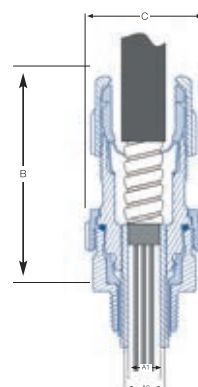

Cable glands for hazardous areas

Star Teck Extreme XP® (STEX) Series - Range-taking glands for Teck cable

Star Teck Extreme XP® (STEX) series

Range-Taking Gland for Teck cable - NPT Thread / **Materials:** Aluminium or Steel

Part No.	NPT Hub Size (inch)	Range Over Jacket Jacket (inch)		Range Over Jacket Armour (inch)		A1 Throat Diameter Min. (inch) with Armour Stop	A2 Throat Diameter Min. (inch) without Armour Stop	B** Length (inch)	C Max. O.D. (inch)	Compound required (approx.) SC65/ SC4KIT Liquid (CC)
		Min.	Max.	Min.	Max.					
STX050-462*	1/2	0.525	0.650	0.415	0.570	N/A***	0.400	2.500	1.630	5
STX050-464*	1/2	0.600	0.760	0.490	0.680	N/A***	0.480	2.530	1.630	5
STEX075*	3/4	0.600	0.985	0.520	0.895	0.500	0.670	3.400	1.820	8
STEX100*	1	0.860	1.205	0.780	1.125	0.645	0.825	3.580	2.300	16
STEX125*	1 1/4	0.950	1.375	0.870	1.295	0.829	1.076	3.920	2.510	23
STEX150*	1 1/2	1.150	1.625	0.990	1.465	0.953	1.280	5.020	3.260	43
STEX200*	2	1.440	1.965	1.280	1.805	1.245	1.565	5.120	3.620	72
STEX250*	2 1/2	1.825	2.375	1.665	2.215	1.630	2.000	5.170	4.580	147
STEX300*	3	2.265	2.840	2.105	2.680	2.066	2.495	6.610	5.100	286
STEX350*	3 1/2	2.670	3.270	2.545	3.145	2.522	2.895	7.380	5.790	366
STEX400*	4	3.220	3.870	3.090	3.640	3.060	3.520	7.650	6.190	614

* For steel version, add 'S' to the reference, e.g. STEX075S, ** Approximate dimension before installation

Note: To order fittings complete with aluminium BondStar locknut and lug, add the suffix 'GRL' to the catalogue number, e.g. STEX075GRL

Sealing Compounds

Part No.	Description	Volume (cm³)
SC4-KIT-1*	Liquid type sealing compound (includes pouch of sealing compound with customizable nozzle and damming fiber)	50
SC65**	Putty type sealing compound (cut-to-length stick)	34

* Use SC4-KIT-1 liquid compound for shielded cables and all power cables with less than 4 conductors (including ground)

** We do not recommend SC65 for use with shielded cables. Suitable for use on cables with a maximum of four conductors (including ground)

Series Star Teck Extreme XP® (STEX) range

Star Teck Extreme XP® (STEX) cable glands are designed to accommodate a broad range of cables and each hub range overlaps the adjacent hub range, thereby minimizing the possibility of mismatched cables and fittings in the field. They are available in hub sizes from 1/2 to 4 inches, and will handle outer jacket diameters from 0.525 to 3.870 inches.

Thread convertors, stopping plugs & accessories

Thread Convertors and Stopping Plugs

Selection guide	4/2
Ex d e Thread convertors - Enlargers, reducers and convertors	4/4
Ex d Standard stopping plugs	4/6
Ex d Tamperproof stopping plugs	4/6
Ex e Hex head stopping plugs	4/8
Ex e Dome head stopping plugs	4/8
Ex e Nylon stopping pugs	4/8
Ex e Drain valve	4/10
Ex d e Female couplers	4/10

Accessories

Earth tag	4/10
Sealing joint washer	4/11
Hex locknut	4/11
Serrated washer	4/11

Thread convertors, stopping plugs & accessories

Selection guide



Thread convertors and Stopping plugs

Type	Thread convertors	Standard stopping plugs	Tamperproof stopping plugs	Hex head stopping plugs	Dome head stopping plugs	Nylon stopping plugs	Drain valve	Female coupler
Approvals								
ATEX	•	•	•	•	•	•	•	•
IEC / IECEX	•	•	•	•	•	•	•	•
ETL	•	•	•	–	–	–	–	–
GOST	•	•	•	•	•	•	–	•
INMETRO	•	•	•	•	•	•	–	•
Protection Type								
Ex e	•	–	–	•	•	•	•	–
Ex d	•	•	•	–	–	–	–	–
Ex tb	–	•	•	•	•	•	•	–
Zones								
Zone 1	•	•	•	•	•	•	•	–
Zone 2	•	•	•	•	•	•	•	–
Zone 21	•	•	•	•	•	•	•	–
Zone 22	•	•	•	•	•	•	•	–
Class / Division								
Class I / Div 1	•	•	•	–	–	–	–	•
Class I / Div 2	–	–	–	–	–	–	–	•
Class II / Div 1	•	•	•	–	–	–	–	•
Class II / Div 2	–	–	–	–	–	–	–	•
Section 4 / Page No.	4/4	4/6	4/6	4/8	4/8	4/8	4/10	4/10

Thread convertors and stopping plugs

Ex d e Thread convertors - Enlargers, reducers and convertors


4



Features

- Thread Convertors provide a method of matching threadforms on hazardous location equipment whilst ensuring the integrity and approval of the installation is maintained

Certifications

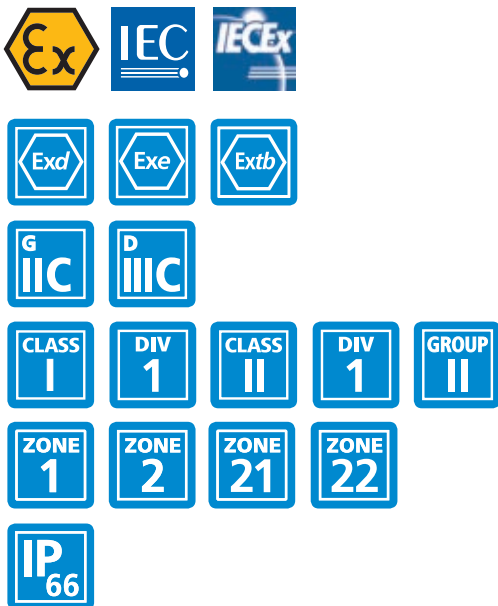

Standards

Certification standard:	ATEX: Baseefa07 ATEX 0247X, IECEX: IECEX BAS07.0090X Ex d IIC Gb Ex e IIC Gb Ex tb IIIC Db Class I Div1 ABCD, Class II Div1 EFG (does not include M16 & 3/8" NPT or unplated brass products)
Approved to:	UL 1203 CSA C22.2 No.60079-04 C22.2 No.60079-1

Thread convertors and stopping plugs

Ex d e Thread convertors - Enlargers, reducers and convertors

Thread Convertors

Enlargers, Reducers and Convertors / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Male External Thread	Metric Female Internal Thread							
	M16	M20	M25	M32	M40	M50	M63	M75
Nickel Plated Brass								
M16		EXN/M16-M20/E	EXN/M16-M25/E					
M20	EXN/M20-M16/R		EXN/M20-M25/E	EXN/M20-M32/E				
M25	EXN/M25-M16/R	EXN/M25-M20/R		EXN/M25-M32/E	EXN/M25-M40/E			
M32	EXN/M32-M16/R	EXN/M32-M20/R	EXN/M32-M25/R		EXN/M32-M40/E	EXN/M32-M50/E		
M40	EXN/M40-M16/R	EXN/M40-M20/R	EXN/M40-M25/R	EXN/M40-M32/R		EXN/M40-M50/E	EXN/M40-M63/E	
M50	EXN/M50-M16/R	EXN/M50-M20/R	EXN/M50-M25/R	EXN/M50-M32/R	EXN/M50-M40/R		EXN/M50-M63/E	EXN/M50-M75/E
M63	EXN/M63-M16/R	EXN/M63-M20/R	EXN/M63-M25/R	EXN/M63-M32/R	EXN/M63-M40/R	EXN/M63-M50/R		EXN/M63-M75/E
M75	EXN/M75-M16/R	EXN/M75-M20/R	EXN/M75-M25/R	EXN/M75-M32/R	EXN/M75-M40/R	EXN/M75-M50/R	EXN/M75-M63/R	
NPT 3/8	EXN/038-M16/TC							
NPT 1/2	EXN/050-M16/TC	EXN/050-M20/TC	EXN/050-M25/TC					
NPT 3/4	EXN/075-M16/TC	EXN/075-M20/TC	EXN/075-M25/TC	EXN/075-M32/TC				
NPT 1	EXN/100-M16/TC	EXN/100-M20/TC	EXN/100-M25/TC	EXN/100-M32/TC	EXN/100-M40/TC			
NPT 1 1/4	EXN/125-M16/TC	EXN/125-M20/TC	EXN/125-M25/TC	EXN/125-M32/TC	EXN/125-M40/TC	EXN/125-M50/TC		
NPT 1 1/2	EXN/150-M16/TC	EXN/150-M20/TC	EXN/150-M25/TC	EXN/150-M32/TC	EXN/150-M40/TC	EXN/150-M50/TC	EXN/150-M63/TC	
NPT 2	EXN/200-M16/TC	EXN/200-M20/TC	EXN/200-M25/TC	EXN/200-M32/TC	EXN/200-M40/TC	EXN/200-M50/TC	EXN/200-M63/TC	
NPT 2 1/2	EXN/250-M16/TC	EXN/250-M20/TC	EXN/250-M25/TC	EXN/250-M32/TC	EXN/250-M40/TC	EXN/250-M50/TC		
NPT 3	EXN/300-M16/TC	EXN/300-M20/TC	EXN/300-M25/TC	EXN/300-M32/TC	EXN/300-M40/TC	EXN/300-M50/TC		EXN/300-M75/TC

4

Thread Convertors

Enlargers, Reducers and Convertors / **Materials:** Brass, Nickel plated brass or Stainless steel 316

Male External Thread	NPT Female Internal Thread							
	NPT 1/2	NPT 3/4	NPT 1	NPT 1 1/4	NPT 1 1/2	NPT 2	NPT 2 1/2	NPT 3
Nickel Plated Brass								
M16	EXN/M16-050/TC							
M20	EXN/M20-050/TC	EXN/M20-075/TC						
M25	EXN/M25-050/TC	EXN/M25-075/TC	EXN/M25-100/TC					
M32	EXN/M32-050/TC	EXN/M32-075/TC	EXN/M32-100/TC	EXN/M32-125/TC				
M40	EXN/M40-050/TC	EXN/M40-075/TC	EXN/M40-100/TC	EXN/M40-125/TC	EXN/M40-150/TC			
M50	EXN/M50-050/TC	EXN/M50-075/TC	EXN/M50-100/TC	EXN/M50-125/TC	EXN/M50-150/TC	EXN/M50-200/TC		
M63	EXN/M63-050/TC	EXN/M63-075/TC	EXN/M63-100/TC	EXN/M63-125/TC	EXN/M63-150/TC	EXN/M63-200/TC		
M75	EXN/M75-050/TC	EXN/M75-075/TC	EXN/M75-100/TC	EXN/M75-125/TC	EXN/M75-150/TC	EXN/M75-200/TC		
NPT 1/2		EXN/050-075/E						
NPT 3/4	EXN/075-050/R		EXN/075-100/E					
NPT 1	EXN/100-050/R	EXN/100-075/R		EXN/100-125/E				
NPT 1 1/4	EXN/125-050/R	EXN/125-075/R	EXN/125-100/R		EXN/125-150/E			
NPT 1 1/2	EXN/150-050/R	EXN/150-075/R	EXN/150-100/R	EXN/150-125/R		EXN/150-200/E		
NPT 2	EXN/200-050/R	EXN/200-075/R	EXN/200-100/R	EXN/200-125/R	EXN/200-150/R			
NPT 2 1/2	EXN/250-050/R	EXN/250-075/R	EXN/250-100/R	EXN/250-125/R	EXN/250-150/R	EXN/250-200/R		EXN/250-300/E
NPT 3	EXN/300-050/R	EXN/300-075/R	EXN/300-100/R	EXN/300-125/R	EXN/300-150/R	EXN/300-200/R	EXN/300-250/R	

* For unplated brass version, remove N from reference, e.g. EX/M20-M16/R

** For stainless steel 316 version, add S to the reference, e.g. EXS/M20-M16/R

N.B. PG thread convertors available upon request

Thread convertors and stopping plugs

Standard Ex d & Tamperproof Ex d stopping plugs


4



Features

- For use in potentially explosive environments
- Manufactured from either brass, nickel plated brass or stainless steel

Certifications

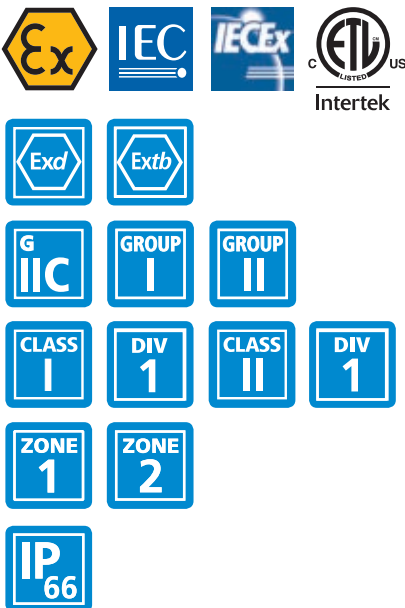

Standards

Approved to:	
EC Type examination certificate to:	ATEX: Baseefa08ATEX0324 IECEx: IECEx BAS08.0109X ETL: 3176087 UL 1203 (Nickel Plated Brass and Stainless Steel only) Ex d I Mb Ex d IIC Gb Class I Div 1 ABCD Class II Div 1 EFG
Safe operating temperature range:	-20°C to +200°C

Thread convertors and stopping plugs

Standard Ex d & Tamperproof Ex d stopping plugs



Standard Ex d Stopping Plug

Standard Ex d Stopping Plug

Standard Ex d Stopping Plug - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
EXN/M16/SP	16	EX/M16/SP	16	EXS/M16/SP	16
EXN/M20/SP	20	EX/M20/SP	20	EXS/M20/SP	20
EXN/M25/SP	25	EX/M25/SP	25	EXS/M25/SP	25
EXN/M32/SP	32	EX/M32/SP	32	EXS/M32/SP	32
EXN/M40/SP	40	EX/M40/SP	40	EXS/M40/SP	40
EXN/M50/SP	50	EX/M50/SP	50	EXS/M50/SP	50
EXN/M63/SP	63	EX/M63/SP	63	EXS/M63/SP	63

Standard Ex d Stopping Plug - NPT Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)
Nickel Plated		Brass		Stainless Steel	
EXN/038/SP	3/8	EX/038/SP	3/8	EXS/038/SP	3/8
EXN/050/SP	1/2	EX/050/SP	1/2	EXS/050/SP	1/2
EXN/075/SP	3/4	EX/075/SP	3/4	EXS/075/SP	3/4
EXN/100/SP	1	EX/100/SP	1	EXS/100/SP	1
EXN/125/SP	1 1/4	EX/125/SP	1 1/4	EXS/125/SP	1 1/4
EXN/150/SP	1 1/2	EX/150/SP	1 1/2	EXS/150/SP	1 1/2
EXN/200/SP	2	EX/200/SP	2	EXS/200/SP	2



Tamperproof Ex d Stopping Plug

Tamperproof Ex d Stopping Plug

Tamperproof Ex d Stopping Plug - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
EXN/M16/TSP	16	EX/M16/TSP	16	EXS/M16/TSP	16
EXN/M20/TSP	20	EX/M20/TSP	20	EXS/M20/TSP	20
EXN/M25/TSP	25	EX/M25/TSP	25	EXS/M25/TSP	25
EXN/M32/TSP	32	EX/M32/TSP	32	EXS/M32/TSP	32
EXN/M40/TSP	40	EX/M40/TSP	40	EXS/M40/TSP	40
EXN/M50/TSP	50	EX/M50/TSP	50	EXS/M50/TSP	50
EXN/M63/TSP	63	EX/M63/TSP	63	EXS/M63/TSP	63

Tamperproof Ex d Stopping Plug - NPT Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)
Nickel Plated		Brass		Stainless Steel	
EXN/038/TSP	3/8	EX/038/TSP	3/8	EXS/038/TSP	3/8
EXN/050/TSP	1/2	EX/050/TSP	1/2	EXS/050/TSP	1/2
EXN/075/TSP	3/4	EX/075/TSP	3/4	EXS/075/TSP	3/4
EXN/100/TSP	1	EX/100/TSP	1	EXS/100/TSP	1
EXN/125/TSP	1 1/4	EX/125/TSP	1 1/4	EXS/125/TSP	1 1/4
EXN/150/TSP	1 1/2	EX/150/TSP	1 1/2	EXS/150/TSP	1 1/2
EXN/200/TSP	2	EX/200/TSP	2	EXS/200/TSP	2

Thread convertors and stopping plugs

Hex head Ex e, Dome head Ex e & Nylon stopping plugs


4



Features

- For use in potentially explosive environments
- Manufactured from either brass, nickel plated brass or stainless steel

Certifications

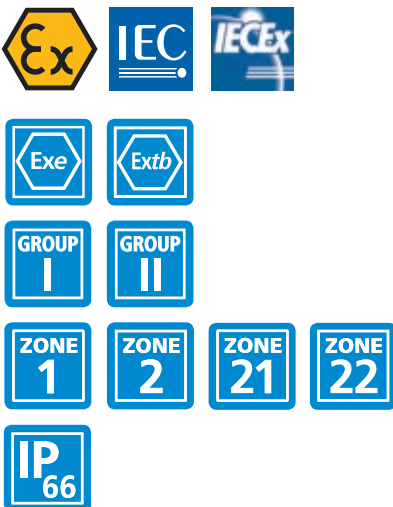

Standards

Approved to:	
EC Type examination certificate to:	(Hex head Ex e stopping plug and dome head stopping plug) ATEX: Baseefa08ATEX0325X IECEX: IECEX BAS08.0108X Ex d I Mb Ex d IIC Gb Class I Div 1 ABCD Class II Div 1 EFG
Safe operating temperature range:	-60°C to +130°C
IP test:	IP65/66

Thread convertors and stopping plugs

Hex head Ex e, Dome head Ex e & Nylon stopping plugs



Hex Head Ex e Stopping Plug




Dome Head Ex e Stopping Plug



Ex e Nylon Stopping Plug

Certifications



Hex Head Ex e Stopping Plug

Hex Head Ex e Stopping Plug - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
EXN/M16/HSP	16	EX/M16/HSP	16	EXS/M16/HSP	16
EXN/M20/HSP	20	EX/M20/HSP	20	EXS/M20/HSP	20
EXN/M25/HSP	25	EX/M25/HSP	25	EXS/M25/HSP	25
EXN/M32/HSP	32	EX/M32/HSP	32	EXS/M32/HSP	32
EXN/M40/HSP	40	EX/M40/HSP	40	EXS/M40/HSP	40
EXN/M50/HSP	50	EX/M50/HSP	50	EXS/M50/HSP	50
EXN/M63/HSP	63	EX/M63/HSP	63	EXS/M63/HSP	63

Note: PG stopping plugs available upon request

Dome Head Ex e Stopping Plug

Dome Head Ex e Stopping Plug - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
EXN/M16/DSP	16	EX/M16/DSP	16	EXS/M16/DSP	16
EXN/M20/DSP	20	EX/M20/DSP	20	EXS/M20/DSP	20
EXN/M25/DSP	25	EX/M25/DSP	25	EXS/M25/DSP	25
EXN/M32/DSP	32	EX/M32/DSP	32	EXS/M32/DSP	32
EXN/M40/DSP	40	EX/M40/DSP	40	EXS/M40/DSP	40
EXN/M50/DSP	50	EX/M50/DSP	50	EXS/M50/DSP	50
EXN/M63/DSP	63	EX/M63/DSP	63	EXS/M63/DSP	63

Note: PG stopping plugs available upon request

Ex e Nylon Stopping Plug

Nylon Stopping Plug - Metric Thread / Materials: Nylon

Part No.	Metric Thread Size (mm)	Standards	
EX-M16	16	Approved to:	
EX-M20	20	EC Type examination certificate to:	IMQ 13 ATEX 016X, IECEx IMQ 13.0005X Ex e IIC Gb Ex tb III Db
EX-M25	25	IP test:	IP66-IP68 (5 Bar 30 Mins)
EX-M32	32		
EX-M40	40		
EX-M50	50		
EX-M63	63		

Accessories

Couplers & Hex Locknuts



Coupler
Female to female thread coupler

4

Certifications



Standards

Baseefa 08 ATEX 0003X

Ex de IIC Gb

Ex tb IIIC Db

Safe operating temperature range:

-60°C to +200°C



Ex e Metallic Drain Valve

Certifications



Ex d e Coupler

Ex d e Coupler - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
EXN/M16/C	16	EX/M16/C	16	EXS/M16/C	16
EXN/M20/C	20	EX/M20/C	20	EXS/M20/C	20
EXN/M25/C	25	EX/M25/C	25	EXS/M25/C	25
EXN/M32/C	32	EX/M32/C	32	EXS/M32/C	32
EXN/M40/C	40	EX/M40/C	40	EXS/M40/C	40
EXN/M50/C	50	EX/M50/C	50	EXS/M50/C	50
EXN/M63/C	63	EX/M63/C	63	EXS/M63/C	63
EXN/M75/C	75	EX/M75/C	75	EXS/M75/C	75

Female to Female Thread Coupler - NPT Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)
Nickel Plated		Brass		Stainless Steel	
EXN/038/C	3/8	EX/038/C	3/8	EXS/038/C	3/8
EXN/050/C	1/2	EX/050/C	1/2	EXS/050/C	1/2
EXN/075/C	3/4	EX/075/C	3/4	EXS/075/C	3/4
EXN/100/C	1	EX/100/C	1	EXS/100/C	1
EXN/125/C	1 1/4	EX/125/C	1 1/4	EXS/125/C	1 1/4
EXN/150/C	1 1/2	EX/150/C	1 1/2	EXS/150/C	1 1/2
EXN/200/C	2	EX/200/C	2	EXS/200/C	2
EXN/250/C	2 1/2	EX/250/C	2 1/2	EXS/250/C	2 1/2

Ex e Metallic Drain Valve

Metallic Drain Valve / Materials: Nickel plated brass / Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	NPT Thread Size (inch)
EXN/M20/DV	20	EXN/050/DV	1/2
EXN/M25/DV	25	EXN/075/DV	3/4

Note: replace EXN for EXS for stainless steel

Earth Tag


Earth Tag - Metric / Materials: Brass

Part No.	Diameter (mm)		
	A	B	C
EX/M16/TAG	16.2 / 16.5	6.5 / 7.0	28.0 / 28.5
EX/M20/TAG	20.2 / 20.5	6.5 / 7.0	28.0 / 28.5
EX/M25/TAG	25.2 / 25.7	6.1 / 6.6	30.5 / 31.0
EX/M32/TAG	32.2 / 32.8	12.2 / 12.7	40.0 / 40.5
EX/M40/TAG	40.2 / 40.7	13.0 / 13.5	45.0 / 45.5
EX/M50/TAG	51.0 / 51.5	13.0 / 13.5	58.0 / 58.5
EX/M63/TAG	63.7 / 64.2	13.0 / 13.5	65.0 / 65.5
EX/M75/TAG	76.4 / 76.9	13.0 / 13.5	75.5 / 76.0

Note: Nickel plated available upon request



Earth Tag



Dimensions

Accessories

Sealing joint washers, Earth tags & Serrated washers



Sealing Joint Washer

Sealing Joint Washer

Sealing Joint Washer - Metric / Materials: Nylon or Fibre

Part No.	Metric Thread Size (mm)	Outside Diameter (mm)	Thickness (mm)	Part No.	Metric Thread Size (mm)	Outside Diameter (mm)	Thickness (mm)
Nylon				Fibre			
EXFM03	16	22.0	1.6	EXFM03F	16	22.0	1.6
EXFM04	20	26.0	1.6	EXFM04F	20	26.0	1.6
EXFM05	25	34.3	1.7	EXFM05F	25	34.3	1.7
EXFM06	32	41.5	1.7	EXFM06F	32	41.5	1.7
EXFM07	40	52.0	2.0	EXFM07F	40	52.0	2.0
EXFM08	50	66.5	2.0	EXFM08F	50	66.5	2.0
EXFM09	63	84.5	2.0				



Hex Locknut


Hex Locknut

Hex Locknut - Metric Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)	Part No.	Metric Thread Size (mm)
Nickel Plated		Brass		Stainless Steel	
WHMM03	16	WHMB03	16	-	16
WHMM04	20	WHMB04	20	MXWH04	20
WHMM05	25	WHMB05	25	MXWH05	25
WHMM06	32	WHMB06	32	MXWH06	32
WHMM07	40	WHMB07	40	MXWH07	40
WHMM08	50	WHMB08	50	MXWH08	50
WHMM09	63	-	63	-	63

Hex Locknut - NPT Thread / Materials: Nickel plated, Brass or Stainless steel

Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)	Part No.	NPT Thread Size (inch)
Nickel Plated		Brass		Stainless Steel	
WHAM03	3/8	WHAB03	3/8	MXAH03	3/8
WHAM04	1/2	WHAB04	1/2	MXAH04	1/2
WHAM05	3/4	WHAB05	3/4	MXAH05	3/4
WHAM06	1	WHAB06	1	MXAH06	1
WHAM07	1 1/4	WHAB07	1 1/4	MXAH07	1 1/4
WHAM08	1 1/2	WHAB08	1 1/2	MXAH08	1 1/2
WHAM09	2	WHAB09	2	MXAH09	2




Serrated Washer

Serrated Washer

Serrated Washer - Metric / Materials: Steel

Part No.	Metric Thread Size (mm)	Diameter (mm)	
		Inside	Outside
EX/M16/SER	16	17.5	28.0
EX/M20/SER	20	21.9	33.0
EX/M25/SER	25	26.2	40.0
EX/M32/SER	32	33.0	48.1
EX/M40/SER	40	41.5	60.2
EX/M53/SER	50	51.5	70.0
EX/M63/SER	63	64.6	86.8



Dimensions

Index

Order code classification

Référence	GID code	Page	Référence	GID code	Page	Référence	GID code	Page
BEAVR03/02	–	2/11	EX/100/SP	7TCA297140R0027	4/7	EX/M63/DSP	–	4/9
BEAVR04/03	–	2/11	EX/100/TSP	7TCA297140R0028	4/7	EX/M63/HSP	7TCA297140R0071	4/9
BEAVR05/04	–	2/11	EX/125/C	–	4/10	EX/M63/SER	7TCA297150R0029	4/11
BEAVR06/05	–	2/11	EX/125/SP	7TCA297140R0029	4/7	EX/M63/SP	7TCA297140R0072	4/7
BEAVR07/06	–	2/11	EX/125/TSP	7TCA297140R0030	4/7	EX/M63/TAG	7TCA297150R0030	4/10
BEAVR08/07	–	2/11	EX/150/C	–	4/10	EX/M63/TSP	7TCA297140R0073	4/7
BEH02	–	2/11	EX/150/SP	7TCA297140R0031	4/7	EX/M75/C	–	4/10
BEH03	–	2/11	EX/150/TSP	7TCA297140R0032	4/7	EX/M75/TAG	7TCA297150R0032	4/10
BEH04	–	2/11	EX/200/C	–	4/10	EXB01010	–	2/4
BEH05	–	2/11	EX/200/SP	7TCA297140R0033	4/7	EXB0350	7TCA297120R0008	2/4
BEH06	–	2/11	EX/200/TSP	7TCA297140R0034	4/7	EXB0450	7TCA297120R0011	2/4
BEH07	–	2/11	EX/250/C	–	4/10	EXB0550	7TCA297120R0014	2/4
BEH08	–	2/11	EX/M16/C	7TCA297130R0078	4/10	EXB0650	7TCA297120R0017	2/4
BENRRE030324	–	2/11	EX/M16/DSP	7TCA297140R0132	4/9	EXB0730	7TCA297120R0019	2/4
BENRRE040428	–	2/11	EX/M16/HSP	7TCA297140R0035	4/9	EXB0830	7TCA297120R0022	2/4
BENRRE050532	–	2/11	EX/M16/SER	–	4/11	EXB0930	–	2/4
BENRRE060644	–	2/11	EX/M16/SP	7TCA297140R0036	4/7	EXBB03	–	2/4
BENRRE070750	–	2/11	EX/M16/TAG	7TCA297150R0013	4/10	EXBB04	–	2/4
BENRRE080865	–	2/11	EX/M16/TSP	7TCA297140R0037	4/7	EXBB05	–	2/4
BESGR0303	–	2/10	EX/M20/C	7TCA297130R0086	4/10	EXBB06	–	2/4
BESGR0404	–	2/10	EX/M20/DSP	7TCA297140R0038	4/9	EXBB07	–	2/4
BESGR0505	–	2/10	EX/M20/HSP	7TCA297140R0040	4/9	EXBB08	–	2/4
BESGR0606	–	2/10	EX/M20/SER	7TCA297150R0014	4/11	EXBBT0310	–	2/16
BESGR0707	–	2/10	EX/M20/SP	7TCA297140R0042	4/7	EXBBT0330	7TCA297120R0043	2/16
BESGR0808	–	2/10	EX/M20/TAG	7TCA297150R0015	4/10	EXBBT0410	7TCA297120R0044	2/16
BETRO20202	–	2/10	EX/M20/TSP	7TCA297140R0044	4/7	EXBBT0430	7TCA297120R0045	2/16
BETRO30303	–	2/10	EX/M25/C	7TCA297130R0096	4/10	EXBBT0510	7TCA297120R0047	2/16
BETRO40404	–	2/10	EX/M25/DSP	7TCA297140R0046	4/9	EXBBT0530	7TCA297120R0048	2/16
BETRO50505	–	2/10	EX/M25/HSP	7TCA297140R0048	4/9	EXBBT0610	–	2/16
BETRO60606	–	2/10	EX/M25/SER	7TCA297150R0017	4/11	EXBBT0620	–	2/16
BETRO70707	–	2/10	EX/M25/SP	7TCA297140R0050	4/7	EXBBT0710	–	2/16
BETRO80808	–	2/10	EX/M25/TAG	7TCA297150R0018	4/10	EXBBT0720	–	2/16
BEYR030202	–	2/10	EX/M25/TSP	7TCA297140R0052	4/7	EXBBT0810	–	2/16
BEYR040303	–	2/10	EX/M32/C	7TCA297130R0108	4/10	EXBBT0820	–	2/16
BEYR050404	–	2/10	EX/M32/DSP	7TCA297140R0054	4/9	EXBQA0304	7TCA297120R0049	2/7
BEYR060505	–	2/10	EX/M32/HSP	7TCA297140R0056	4/9	EXBQA0404	7TCA297120R0050	2/7
BEYR070606	–	2/10	EX/M32/SER	7TCA297150R0020	4/11	EXBQA0505	7TCA297120R0051	2/7
BEYR080707	–	2/10	EX/M32/SP	7TCA297140R0058	4/7	EXBQA0606	7TCA297120R0052	2/7
EX–M16	7TCA297140R0012	4/9	EX/M32/TAG	7TCA297150R0021	4/10	EXBQA0707	7TCA297120R0053	2/7
EX–M20	7TCA297140R0013	4/9	EX/M32/TSP	7TCA297140R0060	4/7	EXBQA0808	7TCA297120R0054	2/7
EX–M25	7TCA297140R0014	4/9	EX/M40/C	7TCA297130R0123	4/10	EXBQM0303	7TCA297120R0055	2/7
EX–M32	7TCA297140R0015	4/9	EX/M40/DSP	7TCA297140R0062	4/9	EXBQM0304	–	2/7
EX–M40	7TCA297140R0016	4/9	EX/M40/HSP	7TCA297140R0063	4/9	EXBQM0404	7TCA297120R0056	2/7
EX–M50	7TCA297140R0017	4/9	EX/M40/SER	7TCA297150R0023	4/11	EXBQM0505	7TCA297120R0057	2/7
EX–M63	7TCA297140R0018	4/9	EX/M40/SP	7TCA297140R0064	4/7	EXBQM0606	7TCA297120R0058	2/7
EX/038/C	–	4/10	EX/M40/TAG	7TCA297150R0024	4/10	EXBQM0707	7TCA297120R0059	2/7
EX/038/SP	7TCA297140R0019	4/7	EX/M40/TSP	7TCA297140R0066	4/7	EXBQM0808	7TCA297120R0060	2/7
EX/038/TSP	7TCA297140R0020	4/7	EX/M50/C	–	4/10	EXCG050M	7TCA297140R0149	3/17
EX/050/C	7TCA297130R0006	4/10	EX/M50/DSP	–	4/9	EXCG050S	7TCA297140R0150	3/17
EX/050/SP	7TCA297140R0021	4/7	EX/M50/HSP	7TCA297140R0067	4/9	EXCG075S	–	3/17
EX/050/TSP	7TCA297140R0023	4/7	EX/M50/SP	7TCA297140R0068	4/7	EXCG100S	–	3/17
EX/075/C	7TCA297130R0014	4/10	EX/M50/TAG	7TCA297150R0027	4/10	EXCGM20M	7TCA297180R0004	3/17
EX/075/SP	7TCA297140R0024	4/7	EX/M50/TSP	7TCA297140R0070	4/7	EXCGM20ML	7TCA297180R0005	3/17
EX/075/TSP	7TCA297140R0026	4/7	EX/M53/SER	–	4/11	EXCGM20S	7TCA297180R0006	3/17
EX/100/C	7TCA297130R0023	4/10	EX/M63/C	7TCA297130R0153	4/10	EXCGM20SL	7TCA297180R0007	3/17

Référence	GID code	Page
EXCGM25M	7TCA297180R0008	3/17
EXCGM25S	7TCA297180R0009	3/17
EXCGM25SL	7TCA297180R0010	3/17
EXCGM32M	-	3/17
EXCGM32S	7TCA297180R0011	3/17
EXCGM40M	7TCA297180R0013	3/17
EXCGM40S	7TCA297180R0014	3/17
EXCGM50S	7TCA297180R0015	3/17
EXCGM63S	7TCA297180R0016	3/17
EXFM03	7TCA297150R0035	4/11
EXFM03F	-	4/11
EXFM04	7TCA297150R0037	4/11
EXFM04F	7TCA297150R0038	4/11
EXFM05	7TCA297150R0040	4/11
EXFM05F	7TCA297150R0041	4/11
EXFM06	7TCA297150R0043	4/11
EXFM06F	7TCA297150R0044	4/11
EXFM07	7TCA297150R0046	4/11
EXFM07F	7TCA297150R0047	4/11
EXFM08	7TCA297150R0049	4/11
EXFM08F	7TCA297150R0071	4/11
EXFM09	7TCA297150R0051	4/11
EXLB0310	7TCA297120R0066	2/12
EXLB0330	7TCA297120R0067	2/12
EXLB0410	7TCA297120R0069	2/12
EXLB0430	7TCA297120R0070	2/12
EXLB0510	7TCA297120R0073	2/12
EXLB0530	7TCA297120R0074	2/12
EXLB0610	7TCA297120R0076	2/12
EXLB0620	-	2/12
EXLB0710	7TCA297120R0078	2/12
EXLB0720	7TCA297120R0079	2/12
EXLB0810	7TCA297120R0080	2/12
EXLB0820	7TCA297120R0081	2/12
EXLB0910	7TCA297120R0082	2/12
EXLB0920	7TCA297120R0083	2/12
EXLH0310	7TCA297120R0084	2/14
EXLH0330	7TCA297120R0085	2/14
EXLH0410	7TCA297120R0086	2/14
EXLH0430	7TCA297120R0087	2/14
EXLH0510	7TCA297120R0089	2/14
EXLH0530	7TCA297120R0090	2/14
EXLH0610	7TCA297120R0092	2/14
EXLH0620	7TCA297120R0093	2/14
EXLH0710	7TCA297120R0095	2/14
EXLH0720	7TCA297120R0096	2/14
EXLH0810	7TCA297120R0098	2/14
EXLH0820	7TCA297120R0099	2/14
EXLH0910	7TCA297120R0100	2/14
EXLH0920	7TCA297120R0101	2/14
EXLHC0310	7TCA297120R0102	2/17
EXLHC0330	-	2/17
EXLHC0410	7TCA297120R0104	2/17
EXLHC0430	7TCA297120R0105	2/17
EXLHC0510	7TCA297120R0106	2/17

Référence	GID code	Page
EXLHC0530	7TCA297120R0107	2/17
EXLHC0610	7TCA297120R0108	2/17
EXLHC0620	7TCA297120R0109	2/17
EXLHC0710	7TCA297120R0110	2/17
EXLHC0720	-	2/17
EXLHC0810	7TCA297120R0112	2/13
EXLHC0810	7TCA297120R0112	2/17
EXLHC0820	-	2/13
EXLHC0820	-	2/17
EXLHC0910	7TCA297120R0114	2/13
EXLHC0910	7TCA297120R0114	2/17
EXLHC0920	-	2/13
EXLHC0920	-	2/17
EXLLH0310	7TCA297120R0116	2/15
EXLLH0330	7TCA297120R0118	2/15
EXLLH0410	7TCA297120R0119	2/15
EXLLH0430	7TCA297120R0121	2/15
EXLLH0510	7TCA297120R0122	2/15
EXLLH0530	7TCA297120R0124	2/15
EXLLH0610	7TCA297120R0125	2/15
EXLLH0620	7TCA297120R0126	2/15
EXLLH0710	-	2/15
EXLLH0720	-	2/15
EXLLH0810	-	2/15
EXLLH0820	-	2/15
EXLLH0910	7TCA297120R0131	2/15
EXLLH0920	-	2/15
EXLT0310	7TCA297120R0133	2/13
EXLT0330	7TCA297120R0135	2/13
EXLT0410	7TCA297120R0136	2/13
EXLT0430	7TCA297120R0137	2/13
EXLT0510	7TCA297120R0138	2/13
EXLT0530	7TCA297120R0139	2/13
EXLT0610	7TCA297120R0140	2/13
EXLT0620	7TCA297120R0141	2/13
EXLT0710	7TCA297120R0143	2/13
EXLT0720	7TCA297120R0144	2/13
EXN/038-M16/TC	-	4/5
EXN/038/C	-	4/10
EXN/038/SP	7TCA297140R0075	4/7
EXN/038/TSP	7TCA297140R0076	4/7
EXN/050-075/E	7TCA297130R0190	4/5
EXN/050-M16/TC	-	4/5
EXN/050-M20/TC	-	4/5
EXN/050-M25/TC	-	4/5
EXN/050/C	7TCA297130R0194	4/10
EXN/050/DV	-	4/10
EXN/050/SP	7TCA297140R0077	4/7
EXN/050/TSP	7TCA297140R0078	4/7
EXN/075-050/R	7TCA297130R0195	4/5
EXN/075-100/E	7TCA297130R0196	4/5
EXN/075-M16/TC	-	4/5
EXN/075-M20/TC	-	4/5
EXN/075-M25/TC	-	4/5
EXN/075-M32/TC	-	4/5

Référence	GID code	Page
EXN/075/C	7TCA297130R0201	4/10
EXN/075/DV	-	4/10
EXN/075/SP	7TCA297140R0079	4/7
EXN/075/TSP	7TCA297140R0080	4/7
EXN/100-050/R	7TCA297130R0202	4/5
EXN/100-075/R	7TCA297130R0203	4/5
EXN/100-125/E	7TCA297130R0204	4/5
EXN/100-M16/TC	-	4/5
EXN/100-M20/TC	-	4/5
EXN/100-M25/TC	-	4/5
EXN/100-M25/TC	-	4/5
EXN/100-M40/TC	-	4/5
EXN/100/C	7TCA297130R0210	4/10
EXN/100/SP	7TCA297140R0081	4/7
EXN/100/TSP	7TCA297140R0082	4/7
EXN/125-050/R	7TCA297130R0211	4/5
EXN/125-075/R	7TCA297130R0212	4/5
EXN/125-100/R	7TCA297130R0213	4/5
EXN/125-150/E	7TCA297130R0214	4/5
EXN/125-M16/TC	-	4/5
EXN/125-M20/TC	-	4/5
EXN/125-M25/TC	-	4/5
EXN/125-M32/TC	-	4/5
EXN/125-M40/TC	-	4/5
EXN/125-M50/TC	-	4/5
EXN/125/C	-	4/10
EXN/125/SP	7TCA297140R0083	4/7
EXN/125/TSP	7TCA297140R0084	4/7
EXN/150-050/R	7TCA297130R0222	4/5
EXN/150-075/R	7TCA297130R0223	4/5
EXN/150-100/R	7TCA297130R0224	4/5
EXN/150-125/R	7TCA297130R0225	4/5
EXN/150-200/E	7TCA297130R0226	4/5
EXN/150-M16/TC	-	4/5
EXN/150-M16/TC	-	4/5
EXN/150-M25/TC	-	4/5
EXN/150-M32/TC	-	4/5
EXN/150-M40/TC	-	4/5
EXN/150-M50/TC	-	4/5
EXN/150-M63/TC	-	4/5
EXN/150/C	-	4/10
EXN/150/SP	7TCA297140R0085	4/7
EXN/150/TSP	7TCA297140R0086	4/7
EXN/200-050/R	7TCA297130R0235	4/5
EXN/200-075/R	7TCA297130R0236	4/5
EXN/200-100/R	7TCA297130R0237	4/5
EXN/200-125/R	7TCA297130R0238	4/5
EXN/200-150/R	7TCA297130R0239	4/5
EXN/200-M16/TC	-	4/5
EXN/200-M20/TC	-	4/5
EXN/200-M25/TC	-	4/5
EXN/200-M32/TC	-	4/5
EXN/200-M40/TC	-	4/5
EXN/200-M50/TC	-	4/5
EXN/200-M63/TC	-	4/5

Index

Order code classification

Référence	GID code	Page	Référence	GID code	Page	Référence	GID code	Page
EXN/200/C	–	4/10	EXN/M25–M32/E	7TCA297130R0273	4/5	EXN/M50/TSP	7TCA297140R0109	4/7
EXN/200/SP	7TCA297140R0087	4/7	EXN/M25–M40/E	7TCA297130R0274	4/5	EXN/M63–050/TC	–	4/5
EXN/200/TSP	7TCA297140R0088	4/7	EXN/M25/C	7TCA297130R0276	4/10	EXN/M63–075/TC	–	4/5
EXN/250–050/R	–	4/5	EXN/M25/DSP	7TCA297140R0096	4/9	EXN/M63–100/TC	–	4/5
EXN/250–075/R	–	4/5	EXN/M25/DV	–	4/10	EXN/M63–125/TC	–	4/5
EXN/250–100/R	–	4/5	EXN/M25/HSP	7TCA297140R0097	4/9	EXN/M63–150/TC	–	4/5
EXN/250–125/R	–	4/5	EXN/M25/SP	7TCA297140R0098	4/7	EXN/M63–200/TC	–	4/5
EXN/250–150/R	–	4/5	EXN/M25/TSP	7TCA297140R0099	4/7	EXN/M63–M16/R	–	4/5
EXN/250–200/R	7TCA297130R0417	4/5	EXN/M32–050/TC	–	4/5	EXN/M63–M20/R	–	4/5
EXN/250–300/E	–	4/5	EXN/M32–075/TC	–	4/5	EXN/M63–M25/R	7TCA297130R0321	4/5
EXN/250–M16/TC	–	4/5	EXN/M32–100/TC	–	4/5	EXN/M63–M32/R	7TCA297130R0322	4/5
EXN/250–M20/TC	–	4/5	EXN/M32–125/TC	–	4/5	EXN/M63–M40/R	7TCA297130R0323	4/5
EXN/250–M25/TC	–	4/5	EXN/M32–M16/R	7TCA297130R0281	4/5	EXN/M63–M50/R	7TCA297130R0324	4/5
EXN/250–M32/TC	–	4/5	EXN/M32–M20/R	7TCA297130R0282	4/5	EXN/M63–M75/E	7TCA297130R0325	4/5
EXN/250–M40/TC	–	4/5	EXN/M32–M25/R	7TCA297130R0283	4/5	EXN/M63/C	–	4/10
EXN/250–M50/TC	–	4/5	EXN/M32–M40/E	7TCA297130R0284	4/5	EXN/M63/DSP	7TCA297140R0144	4/9
EXN/250/C	–	4/10	EXN/M32–M50/E	7TCA297130R0285	4/5	EXN/M63/HSP	7TCA297140R0110	4/9
EXN/300–050/R	–	4/5	EXN/M32/C	7TCA297130R0286	4/10	EXN/M63/SP	7TCA297140R0111	4/7
EXN/300–075/R	–	4/5	EXN/M32/DSP	7TCA297140R0100	4/9	EXN/M63/TSP	7TCA297140R0112	4/7
EXN/300–100/R	–	4/5	EXN/M32/HSP	7TCA297140R0101	4/9	EXN/M75–050/TC	–	4/5
EXN/300–125/R	–	4/5	EXN/M32/SP	7TCA297140R0102	4/7	EXN/M75–075/TC	–	4/5
EXN/300–150/R	–	4/5	EXN/M32/TSP	7TCA297140R0103	4/7	EXN/M75–100/TC	–	4/5
EXN/300–200/R	7TCA297130R0253	4/5	EXN/M40–050/TC	–	4/5	EXN/M75–125/TC	–	4/5
EXN/300–250/R	–	4/5	EXN/M40–075/TC	–	4/5	EXN/M75–150/TC	–	4/5
EXN/300–M16/TC	–	4/5	EXN/M40–100/TC	–	4/5	EXN/M75–200/TC	–	4/5
EXN/300–M20/TC	–	4/5	EXN/M40–125/TC	–	4/5	EXN/M75–M16/R	–	4/5
EXN/300–M25/TC	–	4/5	EXN/M40–150/TC	–	4/5	EXN/M75–M20/R	–	4/5
EXN/300–M32/TC	–	4/5	EXN/M40–M16/R	–	4/5	EXN/M75–M25/R	7TCA297130R0335	4/5
EXN/300–M40/TC	–	4/5	EXN/M40–M20/R	7TCA297130R0293	4/5	EXN/M75–M32/R	7TCA297130R0336	4/5
EXN/300–M50/TC	–	4/5	EXN/M40–M25/R	7TCA297130R0294	4/5	EXN/M75–M40/R	7TCA297130R0337	4/5
EXN/300–M75/TC	–	4/5	EXN/M40–M32/R	7TCA297130R0295	4/5	EXN/M75–M50/R	7TCA297130R0338	4/5
EXN/M16–050/TC	–	4/5	EXN/M40–M50/E	7TCA297130R0296	4/5	EXN/M75–M63/R	7TCA297130R0339	4/5
EXN/M16–M20/E	7TCA297130R0259	4/5	EXN/M40–M63/E	7TCA297130R0297	4/5	EXN/M75/C	–	4/10
EXN/M16–M25/E	–	4/5	EXN/M40/C	7TCA297130R0298	4/10	EXN03AMC1	7TCA297180R0017	3/5
EXN/M16/C	7TCA297130R0261	4/10	EXN/M40/DSP	7TCA297140R0145	4/9	EXN03AMC2	7TCA297180R0018	3/7
EXN/M16/DSP	7TCA297140R0143	4/9	EXN/M40/HSP	7TCA297140R0104	4/9	EXN03AMC3	7TCA297180R0292	3/9
EXN/M16/HSP	7TCA297140R0089	4/9	EXN/M40/SP	7TCA297140R0105	4/7	EXN03AMC6	–	3/15
EXN/M16/SP	7TCA297140R0090	4/7	EXN/M40/TSP	7TCA297140R0106	4/7	EXN03ASC1	7TCA297180R0019	3/5
EXN/M16/TSP	7TCA297140R0091	4/7	EXN/M50–050/TC	–	4/5	EXN03ASC3	–	3/9
EXN/M20–050/TC	–	4/5	EXN/M50–075/TC	–	4/5	EXN03ASC6	–	3/15
EXN/M20–075/TC	–	4/5	EXN/M50–100/TC	–	4/5	EXN03MMC1	7TCA297180R0020	3/5
EXN/M20–M16/R	7TCA297130R0264	4/5	EXN/M50–125/TC	–	4/5	EXN03MMC2	7TCA297180R0021	3/7
EXN/M20–M25/E	7TCA297130R0265	4/5	EXN/M50–150/TC	–	4/5	EXN03MMC2	7TCA297180R0021	3/15
EXN/M20–M32/E	7TCA297130R0266	4/5	EXN/M50–200/TC	–	4/5	EXN03MMC3	7TCA297180R0276	3/9
EXN/M20/C	7TCA297130R0267	4/10	EXN/M50–M16/R	–	4/5	EXN03MMC6	–	3/15
EXN/M20/DSP	7TCA297140R0092	4/9	EXN/M50–M20/R	7TCA297130R0306	4/5	EXN03MSC1	7TCA297180R0022	3/5
EXN/M20/DV	–	4/10	EXN/M50–M25/R	7TCA297130R0307	4/5	EXN03MSC3	7TCA297180R0275	3/9
EXN/M20/HSP	7TCA297140R0093	4/9	EXN/M50–M32/R	7TCA297130R0308	4/5	EXN03MSC6	–	3/15
EXN/M20/SP	7TCA297140R0094	4/7	EXN/M50–M40/R	7TCA297130R0309	4/5	EXN04AC4	7TCA297180R0697	3/11
EXN/M20/TSP	7TCA297140R0095	4/7	EXN/M50–M63/E	7TCA297130R0310	4/5	EXN04AC5	7TCA297180R0698	3/13
EXN/M25–050/TC	–	4/5	EXN/M50–M75/E	7TCA297130R0311	4/5	EXN04ALC1	7TCA297180R0023	3/5
EXN/M25–075/TC	–	4/5	EXN/M50/C	7TCA297130R0312	4/10	EXN04ALC2	7TCA297180R0024	3/7
EXN/M25–100/TC	–	4/5	EXN/M50/DSP	7TCA297140R0146	4/9	EXN04AMC1	7TCA297180R0025	3/5
EXN/M25–M16/R	7TCA297130R0271	4/5	EXN/M50/HSP	7TCA297140R0107	4/9	EXN04AMC2	7TCA297180R0026	3/7
EXN/M25–M20/R	7TCA297130R0272	4/5	EXN/M50/SP	7TCA297140R0108	4/7	EXN04AMC3	7TCA297180R0295	3/9

Référence	GID code	Page
EXN04AMC6	-	3/15
EXN04ASC1	7TCA297180R0027	3/5
EXN04ASC3	7TCA297180R0294	3/9
EXN04MC4	7TCA297180R0699	3/11
EXN04MLC1	7TCA297180R0028	3/5
EXN04MLC2	7TCA297180R0029	3/7
EXN04MMC1	7TCA297180R0030	3/5
EXN04MMC2	7TCA297180R0031	3/7
EXN04MMC3	7TCA297180R0278	3/9
EXN04MMC6	-	3/15
EXN04MSC1	7TCA297180R0032	3/5
EXN04MSC3	7TCA297180R0277	3/9
EXN05AC4	7TCA297180R0701	3/11
EXN05AC5	7TCA297180R0702	3/13
EXN05ALC1	7TCA297180R0033	3/5
EXN05ALC2	7TCA297180R0034	3/7
EXN05ALC3	7TCA297180R0227	3/9
EXN05AMC1	7TCA297180R0035	3/5
EXN05AMC2	7TCA297180R0036	3/7
EXN05AMC3	7TCA297180R0226	3/9
EXN05AMC6	-	3/15
EXN05ASC1	7TCA297180R0037	3/5
EXN05ASC3	7TCA297180R0230	3/9
EXN05MC4	7TCA297180R0703	3/11
EXN05MC5	7TCA297180R0704	3/13
EXN05MLC1	7TCA297180R0038	3/5
EXN05MLC2	7TCA297180R0039	3/7
EXN05MLC3	7TCA297180R0280	3/9
EXN05MMC1	7TCA297180R0040	3/5
EXN05MMC2	7TCA297180R0041	3/7
EXN05MMC3	7TCA297180R0279	3/9
EXN05MMC6	-	3/15
EXN05MSC1	7TCA297180R0042	3/5
EXN05MSC3	7TCA297180R0256	3/9
EXN06AC4	7TCA297180R0705	3/11
EXN06AC5	7TCA297180R0706	3/13
EXN06ALC2	7TCA297180R0043	3/7
EXN06AMC1	7TCA297180R0044	3/5
EXN06AMC2	7TCA297180R0045	3/7
EXN06AMC3	7TCA297180R0297	3/9
EXN06AMC6	-	3/15
EXN06ASC1	7TCA297180R0046	3/5
EXN06ASC3	7TCA297180R0296	3/9
EXN06MC4	7TCA297180R0707	3/11
EXN06MC5	7TCA297180R0708	3/13
EXN06MLC2	7TCA297180R0047	3/7
EXN06MMC1	7TCA297180R0048	3/5
EXN06MMC2	7TCA297180R0049	3/7
EXN06MMC3	7TCA297180R0282	3/9
EXN06MMC6	-	3/15
EXN06MSC1	7TCA297180R0050	3/5
EXN06MSC3	7TCA297180R0281	3/9
EXN07AC4	7TCA297180R0709	3/11
EXN07AC5	7TCA297180R0710	3/13
EXN07ALC2	7TCA297180R0051	3/7

Référence	GID code	Page
EXN07AMC1	7TCA297180R0052	3/5
EXN07AMC2	7TCA297180R0053	3/7
EXN07AMC3	7TCA297180R0299	3/9
EXN07AMC6	-	3/15
EXN07ASC1	7TCA297180R0054	3/5
EXN07ASC3	7TCA297180R0298	3/9
EXN07MC4	7TCA297180R0711	3/11
EXN07MC5	7TCA297180R0712	3/13
EXN07MLC2	7TCA297180R0055	3/7
EXN07MMC1	7TCA297180R0056	3/5
EXN07MMC2	7TCA297180R0057	3/7
EXN07MMC3	7TCA297180R0284	3/9
EXN07MMC6	-	3/15
EXN07MSC1	7TCA297180R0058	3/5
EXN07MSC3	7TCA297180R0283	3/9
EXN08AC4	7TCA297180R0735	3/11
EXN08AC5	7TCA297180R0736	3/13
EXN08AMC1	7TCA297180R0060	3/5
EXN08AMC2	7TCA297180R0061	3/7
EXN08AMC3	7TCA297180R0301	3/9
EXN08AMC6	-	3/15
EXN08ASC1	7TCA297180R0062	3/5
EXN08ASC2	-	3/7
EXN08ASC3	7TCA297180R0300	3/9
EXN08MC4	7TCA297180R0737	3/11
EXN08MC4	7TCA297180R0737	3/13
EXN08MMC1	7TCA297180R0064	3/5
EXN08MMC2	7TCA297180R0065	3/7
EXN08MMC3	7TCA297180R0286	3/9
EXN08MMC6	-	3/15
EXN08MSC1	7TCA297180R0066	3/5
EXN08MSC2	-	3/7
EXN08MSC3	7TCA297180R0285	3/9
EXN09AC4	7TCA297180R0751	3/11
EXN09AC5	7TCA297180R0752	3/13
EXN09AMC1	7TCA297180R0068	3/5
EXN09AMC2	7TCA297180R0069	3/7
EXN09AMC3	7TCA297180R0303	3/9
EXN09ASC1	7TCA297180R0070	3/5
EXN09ASC2	-	3/7
EXN09ASC3	7TCA297180R0302	3/9
EXN09MC4	7TCA297180R0753	3/11
EXN09MC4	7TCA297180R0753	3/13
EXN09MMC1	7TCA297180R0072	3/5
EXN09MMC2	7TCA297180R0073	3/7
EXN09MMC3	7TCA297180R0288	3/9
EXN09MSC1	7TCA297180R0074	3/5
EXN09MSC2	-	3/7
EXN09MSC3	7TCA297180R0287	3/9
EXN10AMC1	7TCA297180R0076	3/5
EXN10AMC2	7TCA297180R0077	3/7
EXN10AMC3	7TCA297180R0305	3/9
EXN10ASC1	7TCA297180R0078	3/5
EXN10ASC2	-	3/7
EXN10ASC3	7TCA297180R0304	3/9

Référence	GID code	Page
EXN10MMC1	7TCA297180R0080	3/5
EXN10MMC2	7TCA297180R0081	3/7
EXN10MMC3	7TCA297180R0290	3/9
EXN10MSC1	7TCA297180R0082	3/5
EXN10MSC2	-	3/7
EXN10MSC3	7TCA297180R0289	3/9
EXN11AMC1	-	3/5
EXN11AMC2	-	3/7
EXN11AMC3	-	3/9
EXN11ASC1	-	3/5
EXN11ASC2	-	3/7
EXN11ASC3	-	3/9
EXN11MMC1	7TCA297180R0223	3/5
EXN11MMC2	-	3/7
EXN11MMC3	-	3/9
EXN11MSC1	-	3/5
EXN11MSC2	-	3/7
EXN11MSC3	-	3/9
EXN12AMC2	-	3/7
EXN12ASC2	-	3/7
EXN12MMC2	-	3/7
EXN12MSC2	-	3/7
EXPQA0304	7TCA297120R0162	2/7
EXPQA0404	7TCA297120R0163	2/7
EXPQA0505	7TCA297120R0164	2/7
EXPQA0606	7TCA297120R0165	2/7
EXPQA0707	7TCA297120R0166	2/7
EXPQA0808	7TCA297120R0167	2/7
EXPQA0909	-	2/7
EXPQA1010	-	2/7
EXPQM0303	7TCA297120R0168	2/7
EXPQM0303	7TCA297120R0168	2/7
EXPQM0404	7TCA297120R0170	2/7
EXPQM0505	7TCA297120R0171	2/7
EXPQM0606	7TCA297120R0172	2/7
EXPQM0707	7TCA297120R0173	2/7
EXPQM0808	7TCA297120R0174	2/7
EXPQM0909	-	2/7
EXPQM1010	-	2/7
EXS/038/C	-	4/10
EXS/038/SP	7TCA297140R0133	4/7
EXS/038/TSP	-	4/7
EXS/050/C	7TCA297130R0365	4/10
EXS/050/SP	7TCA297140R0113	4/7
EXS/050/TSP	7TCA297140R0152	4/7
EXS/075/C	7TCA297130R0367	4/10
EXS/075/SP	7TCA297140R0134	4/7
EXS/075/TSP	7TCA297140R0153	4/7
EXS/100/C	7TCA297130R0374	4/10
EXS/100/SP	7TCA297070R0123	4/7
EXS/100/TSP	-	4/7
EXS/125/C	-	4/10
EXS/125/SP	7TCA297140R0135	4/7
EXS/125/TSP	-	4/7
EXS/150/C	-	4/10

Index & useful information

Order code classification

Référence	GID code	Page	Référence	GID code	Page	Référence	GID code	Page
EXS/150/SP	7TCA297140R0114	4/7	EXSB0920	–	2/12	EXST0310	7TCA297120R0304	2/13
EXS/150/TSP	–	4/7	EXSBBT0310	–	2/16	EXST0330	7TCA297120R0305	2/13
EXS/200/C	–	4/10	EXSBBT0330	–	2/16	EXST0410	7TCA297120R0306	2/13
EXS/200/SP	7TCA297140R0115	4/7	EXSBBT0410	–	2/16	EXST0430	7TCA297120R0307	2/13
EXS/200/TSP	–	4/7	EXSBBT0430	–	2/16	EXST0510	7TCA297120R0308	2/13
EXS/250/C	–	4/10	EXSBBT0510	–	2/16	EXST0530	7TCA297120R0309	2/13
EXS/M16/C	–	4/10	EXSBBT0530	–	2/16	EXST0610	7TCA297120R0310	2/13
EXS/M16/DSP	7TCA297140R0148	4/9	EXSBBT0610	–	2/16	EXST0620	7TCA297120R0311	2/13
EXS/M16/HSP	7TCA297140R0116	4/9	EXSBBT0620	–	2/16	EXST0710	7TCA297120R0312	2/13
EXS/M16/SP	–	4/7	EXSBBT0710	–	2/16	EXST0720	–	2/13
EXS/M16/TSP	–	4/7	EXSBBT0720	–	2/16	EXST0810	7TCA297120R0314	2/13
EXS/M20/C	7TCA297130R0399	4/10	EXSBBT0810	–	2/16	EXST0820	–	2/13
EXS/M20/DSP	7TCA297140R0126	4/9	EXSBBT0820	–	2/16	EXST0910	–	2/13
EXS/M20/HSP	7TCA297140R0117	4/9	EXSH0310	7TCA297120R0264	2/14	EXST0920	–	2/13
EXS/M20/SP	7TCA297140R0118	4/7	EXSH0330	7TCA297120R0265	2/14	HAA0304U	7TCA297090R0045	2/23
EXS/M20/TSP	–	4/7	EXSH0410	7TCA297120R0266	2/14	HAA0404U	7TCA297090R0049	2/23
EXS/M25/C	7TCA297130R0402	4/10	EXSH0430	7TCA297120R0267	2/14	HAA0505U	7TCA297090R0053	2/23
EXS/M25/DSP	7TCA297140R0127	4/9	EXSH0510	7TCA297120R0268	2/14	HAA0606U	7TCA297090R0055	2/23
EXS/M25/HSP	7TCA297140R0119	4/9	EXSH0530	7TCA297120R0269	2/14	HAA0707U	7TCA297090R0057	2/23
EXS/M25/SP	7TCA297140R0121	4/7	EXSH0610	7TCA297120R0270	2/14	HAA0808U	7TCA297090R0059	2/23
EXS/M25/TSP	–	4/7	EXSH0620	7TCA297120R0271	2/14	HAA0909U	7TCA297090R0061	2/23
EXS/M32/C	7TCA297130R0404	4/10	EXSH0710	7TCA297120R0273	2/14	HAAM0304E	7TCA297090R0164	2/20
EXS/M32/DSP	7TCA297140R0128	4/9	EXSH0720	7TCA297120R0274	2/14	HAAM0304G1	7TCA297090R0062	2/19
EXS/M32/HSP	7TCA297130R0428	4/9	EXSH0810	7TCA297120R0275	2/14	HAAM0304U	7TCA297090R0063	2/23
EXS/M32/SP	7TCA297140R0122	4/7	EXSH0820	7TCA297120R0276	2/14	HAAM0404E	7TCA297090R0064	2/20
EXS/M32/TSP	–	4/7	EXSH0910	7TCA297120R0277	2/14	HAAM0404G1	7TCA297090R0065	2/19
EXS/M40/C	7TCA297130R0409	4/10	EXSH0920	7TCA297120R0278	2/14	HAAM0404U	7TCA297090R0066	2/23
EXS/M40/DSP	7TCA297140R0129	4/9	EXSHC0310	7TCA297120R0279	2/17	HAAM0505E	7TCA297090R0067	2/20
EXS/M40/HSP	7TCA297130R0429	4/9	EXSHC0330	7TCA297120R0280	2/17	HAAM0505G1	7TCA297090R0068	2/19
EXS/M40/SP	7TCA297140R0123	4/7	EXSHC0410	7TCA297120R0281	2/17	HAAM0505U	7TCA297090R0069	2/23
EXS/M40/TSP	–	4/7	EXSHC0430	7TCA297120R0282	2/17	HAAM0606E	7TCA297090R0070	2/20
EXS/M50/C	7TCA297130R0421	4/10	EXSHC0510	7TCA297120R0283	2/17	HAAM0606G1	7TCA297090R0071	2/19
EXS/M50/DSP	7TCA297140R0130	4/9	EXSHC0530	7TCA297090R0028	2/17	HAAM0606U	7TCA297090R0072	2/23
EXS/M50/HSP	7TCA297130R0430	4/9	EXSHC0610	7TCA297120R0284	2/17	HAAM0707E	–	2/20
EXS/M50/SP	7TCA297140R0124	4/7	EXSHC0620	–	2/17	HAAM0707G1	7TCA297090R0073	2/19
EXS/M50/TSP	–	4/7	EXSHC0710	7TCA297120R0286	2/17	HAAM0707U	7TCA297090R0074	2/23
EXS/M63/C	7TCA297130R0408	4/10	EXSHC0720	–	2/17	HAAM0808E	7TCA297080R0063	2/20
EXS/M63/DSP	–	4/9	EXSHC0810	–	2/17	HAAM0808G1	7TCA297090R0075	2/19
EXS/M63/HSP	7TCA297130R0431	4/9	EXSHC0820	7TCA297120R0287	2/17	HAAM0808U	7TCA297090R0076	2/23
EXS/M63/SP	–	4/7	EXSHC0910	7TCA297070R0002	2/17	HAAM0909G1	7TCA297090R0077	2/19
EXS/M63/TSP	–	4/7	EXSHC0920	–	2/17	HAAM0909U	7TCA297090R0078	2/23
EXS/M75/C	–	4/10	EXSLH0310	–	2/15	HAAS0304U	7TCA297090R0080	2/23
EXSB0310	7TCA297120R0248	2/12	EXSLH0330	–	2/15	HAAS0404U	7TCA297090R0082	2/23
EXSB0330	7TCA297120R0249	2/12	EXSLH0410	–	2/15	HAAS0505U	7TCA297090R0084	2/23
EXSB0410	7TCA297120R0250	2/12	EXSLH0430	–	2/15	HAAS0606U	7TCA297090R0086	2/23
EXSB0430	7TCA297120R0251	2/12	EXSLH0510	–	2/15	HAAS0707U	7TCA297090R0088	2/23
EXSB0510	7TCA297120R0252	2/12	EXSLH0530	–	2/15	HAAS0808U	7TCA297090R0090	2/23
EXSB0530	7TCA297120R0253	2/12	EXSLH0610	7TCA297120R0288	2/15	HAAS0909U	7TCA297090R0092	2/23
EXSB0610	7TCA297120R0254	2/12	EXSLH0620	–	2/15	HAM0304U	7TCA297090R0096	2/23
EXSB0620	7TCA297120R0255	2/12	EXSLH0710	–	2/15	HAM0404U	7TCA297090R0100	2/23
EXSB0710	–	2/12	EXSLH0720	–	2/15	HAM0505U	7TCA297090R0105	2/23
EXSB0720	7TCA297120R0258	2/12	EXSLH0810	–	2/15	HAM0606U	7TCA297090R0110	2/23
EXSB0810	7TCA297120R0260	2/12	EXSLH0820	–	2/15	HAM0707U	7TCA297090R0115	2/23
EXSB0820	7TCA297120R0262	2/12	EXSLH0910	–	2/15	HAM0808U	7TCA297090R0120	2/23
EXSB0910	7TCA297120R0263	2/12	EXSLH0920	–	2/15	HAM0909U	7TCA297090R0123	2/23

Référence	GID code	Page	Référence	GID code	Page	Référence	GID code	Page
HAMMO304E	7TCA297090R0124	2/20	NEBV0505	-	2/9	STX300-479	-	3/21
HAMMO304G1	7TCA297090R0125	2/19	NEBV0606	-	2/9	STX350-480	-	3/21
HAMMO304U	7TCA297090R0126	2/23	NEBV0707	-	2/9	STX350-481	-	3/21
HAMMO304U	7TCA297090R0126	2/23	NEBV0808	-	2/9	STX400-482	-	3/21
HAMMO404E	7TCA297090R0127	2/20	NEIR0303	-	2/11	STX400-483	-	3/21
HAMMO404G1	7TCA297090R0128	2/19	NEIR0404	-	2/11	STX400-484	-	3/21
HAMMO404U	7TCA297090R0129	2/23	NEIR0505	-	2/11	STX400-485	-	3/21
HAMMO505E	7TCA297090R0131	2/20	NEIR0606	-	2/11	WHAB03	-	4/11
HAMMO505G1	7TCA297090R0132	2/19	NEIR0707	-	2/11	WHAB04	-	4/11
HAMMO505U	7TCA297090R0133	2/23	NEIR0808	-	2/11	WHAB05	-	4/11
HAMMO606E	7TCA297090R0135	2/20	NENV0203	-	2/9	WHAB06	-	4/11
HAMMO606G1	7TCA297090R0136	2/19	NENV0303	-	2/9	WHAB07	-	4/11
HAMMO606U	7TCA297090R0137	2/23	NENV0404	-	2/9	WHAB08	-	4/11
HAMMO707E	7TCA297090R0139	2/20	NENV0505	-	2/9	WHAB09	-	4/11
HAMMO707G1	7TCA297090R0140	2/19	NENV0606	-	2/9	WHAM03	-	4/11
HAMMO707U	7TCA297090R0141	2/23	NENV0707	-	2/9	WHAM04	-	4/11
HAMMO808E	-	2/20	NENV0808	-	2/9	WHAM05	-	4/11
HAMMO808G1	7TCA297090R0143	2/19	NENV0909	-	2/9	WHAM06	-	4/11
HAMMO808U	7TCA297090R0144	2/23	NENZ0203S/P	-	2/9	WHAM07	-	4/11
HAMMO909G1	7TCA297090R0145	2/19	NENZ0304S/P	-	2/9	WHAM08	-	4/11
HAMMO909U	7TCA297090R0146	2/23	NENZ0404S/P	-	2/9	WHAM09	-	4/11
HAMS0404U	7TCA297090R0150	2/23	NENZ0405S/P	-	2/9	WHMB03	-	4/11
HAMS0505U	7TCA297090R0152	2/23	NENZ0505S/P	-	2/9	WHMB04	-	4/11
HAMS0606U	7TCA297090R0154	2/23	NENZ0606S/P	-	2/9	WHMB05	-	4/11
HAMS0707U	7TCA297090R0156	2/23	NENZ0707S/P	-	2/9	WHMB06	-	4/11
HAMS0808U	7TCA297090R0158	2/23	NENZ0808S/P	-	2/9	WHMB07	-	4/11
HAMS0909U	7TCA297090R0160	2/23	NEWV0303	-	2/9	WHMB08	-	4/11
ISR050-053	-	3/19	SC4-KIT-1	-	3/21, 3/23	WHMM03	-	4/11
ISR050-062	-	3/19	SC65	-	3/21, 3/23	WHMM04	-	4/11
ISR075-082	-	3/19	STEX050	-	3/23	WHMM05	-	4/11
ISR100-102	-	3/19	STEX075	-	3/23	WHMM06	-	4/11
ISR125-122	-	3/19	STEX100	-	3/23	WHMM07	-	4/11
ISR125-137	-	3/19	STEX125	-	3/23	WHMM08	-	4/11
ISR150-156	-	3/19	STEX150	-	3/23	WHMM09	-	4/11
ISR200-179	-	3/19	STEX200	-	3/23	XESX0250	7TCA297120R0330	2/5
ISR200-206	-	3/19	STEX250	-	3/23	XESX0350	7TCA297120R0331	2/5
MXAH03	-	4/11	STEX300	-	3/23	XESX0450	7TCA297120R0332	2/5
MXAH04	-	4/11	STEX350	-	3/23	XESX0550	7TCA297120R0333	2/5
MXAH05	-	4/11	STEX400	-	3/23	XESX0650	7TCA297120R0334	2/5
MXAH06	-	4/11	STX050-462	-	3/21, 3/23	XESX0730	7TCA297120R0335	2/5
MXAH07	-	4/11	STX050-464	-	3/21, 3/23	XESX0830	7TCA297120R0336	2/5
MXAH08	-	4/11	STX075-465	-	3/21	XPLFL110	-	2/25
MXAH09	-	4/11	STX075-466	-	3/21	XPLFL112	-	2/25
MXWH04	-	4/11	STX100-467	-	3/21	XPLFL115	-	2/25
MXWH05	-	4/11	STX100-468	-	3/21	XPLFL118	-	2/25
MXWH06	-	4/11	STX125-469	-	3/21	XPLFL124	-	2/25
MXWH07	-	4/11	STX150-470	-	3/21	XPLFL16	-	2/25
MXWH08	-	4/11	STX150-471	-	3/21	XPLFL18	-	2/25
NEAV0303	-	2/10	STX150-550	-	3/21	XPLFL212	-	2/25
NEAV0404	-	2/10	STX200-472	-	3/21	XPLFL215	-	2/25
NEAV0505	-	2/10	STX200-473	-	3/21	XPLFL218	-	2/25
NEAV0606	-	2/10	STX200-474	-	3/21	XPLFL224	-	2/25
NEAV0707	-	2/10	STX250-475	-	3/21	XPLFL236	-	2/25
NEAV0808	-	2/10	STX250-476	-	3/21	XPLFL318	-	2/25
NEBV0404	-	2/9	STX300-478	-	3/21			

Notes

A series of horizontal dotted lines for taking notes.

Contact us

Thomas & Betts - Kopex-Ex
Member of the ABB Group
Station Road, Coleshill,
Birmingham, B46 1HT
Tel: +44 (0) 1675 468 21 3
Fax: +44 (0) 1675 468 2 80

www.tnb-hazardous.com
www.abb.com/lowvoltage

Note: We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright © 2015 ABB
All rights reserved



dystrybucja w Polsce

ASTE Sp. z o.o.
Kowale, ul. Magnacka 25
80-180 Gdańsk
tel. 58 340 69 00, fax 58 340 69 01
e-mail: aste@aste.pl, www.aste.pl